




GE
Lighting

96714 - GE232-MVPS-N

GE LFL UltraStart® Electronic Program / Rapid Start Ballast

- < 10% THD, > 99% power factor
- A new generation of ultra-efficient Programmed Start ballasts (> 90% efficiency).
- Anti-striation circuitry reduces striations with energy saving lamps
- Extends lamp life in frequently switched applications (> 100,000 on/off cycles)
- Multi-Voltage Technology handles voltage from 120 to 277V
- Starting time visually the same as instant start

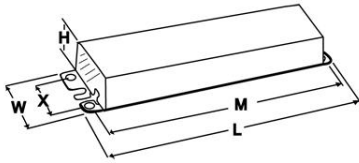

GENERAL CHARACTERISTICS

Lamp Type	Fluorescent -
Bulb	Electronic
Ballast Type	Program / Rapid Start
Starting Method	Programmed start
Lamp Wiring	Parallel
Line Voltage Regulation (+/-)	10.0 %
Case Temperature (MAX)	70.0 °C
Ballast Factor	Normal
Power Factor Correction	Active
Sound Rating	A (20-24 decibels)
Enclosure Type	Metal
Additional Info	Anti-striation control/ Thermally protected/ Universal voltage

ELECTRICAL CHARACTERISTICS

Supply Current Frequency (MIN)	50.0 Hz
Supply Current Frequency	60.0 Hz

DIMENSIONS

Weight	1.65 lb
Exit Type	
Remote Mounting Distance	18.0 ft
Remote Mounting Wire Gauge	18.0 AWG

PRODUCT INFORMATION

Product Code	96714
Description	GE232-MVPS-N
Standard Package	Case
Standard Package GTIN	10043168967140
Standard Package Quantity	10
Sales Unit	Standard Pack
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168967143