




**Product Datasheet**

**ANDERSON FARGO**


**VCJS831R -- Partial Tension Compression Splice**

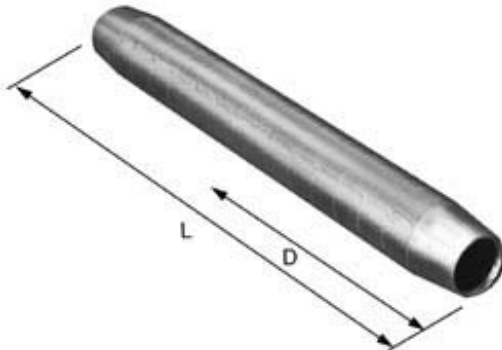

Partial Tension VersaCrimp Aluminum Compression Splice

**Product Specifications**

**Splice Type**



**VERSA-CRIMP®**  
**Compression Splices**  
(For use with  
VersaCrimp and other  
Dieless Type Tools)

**Versacrimp Compression Series**



**VCJS-R Series**  
**Compression Splice**  
**VERSA-CRIMP®**  
**Partial Tension**  
**AAC or AAAC Conductor**

**PDF Catalog Page**

[Click HERE to view the web page.](#)

**VersaCrimp Conductor Size  
Minimum**

0.574 in

**VersaCrimp Conductor Size  
Maximum**

0.883 in

**Material**

Aluminum

**VersaCrimp Conductor Range**

250 (37, 19) - 556.5 (37, 19) AAC, 266.8 (30/7, 26/7, 24/7, 18/1) - 477 (26/7, 24/7, 18/1) ACSR

**VersaCrimp Conductor Minimum**

.574 in

**VersaCrimp Conductor Maximum**

.883 in

**Dimension D**

5.50 in (140 mm)

**Dimension L**

11.12 in (283 mm)

**Length before Compression**

11.12 in (283 mm)

<b>Compression Method</b>	VC8, VersaCrimp Tooling ONLY
<b>UL Listed</b>	No
<b>Inhibitor Loaded</b>	Yes
<b>Material Type</b>	Non-Standard
<b>UPC Code</b>	09635933676
<b>Standard Package</b>	15
<b>Standard Package Unit</b>	Each
<b>Min Order Qty</b>	15
<b>Weight / Ea.</b>	1.274 lbs

#### Notes

For AL, compact, 5005, 6201 and ACAR partial tension (40% rating) conductor jumper splicing.

#### Features

For use with VC8 tools.

#### Compressed Product Number

VCJS831R

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

*All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.*

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.