



**POWER  
SYSTEMS, INC.**

*In the world of power transmission and distribution, look to Hubbell.*


**Interactive  
eCatalog**

[Catalog Home](#)

**Product Datasheet**

**ANDERSON FARGO**

**VAULH112 -- Terminal, Compression**

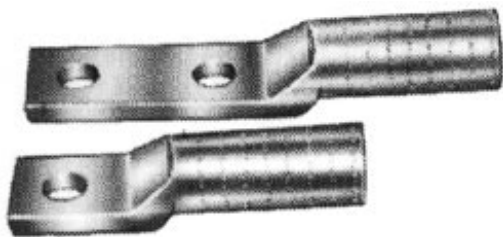

Aluminum Compression Terminal (Replaces ESP-AD, AMS, and ALM Series)

**Product Specifications**

Series Image (Lugs)



**VAUL Series**

Aluminum Compression Lug  
Heavy Duty 1 or 2 hole  
VERSAtile (die and VC tools)

|                                                      |                                                          |
|------------------------------------------------------|----------------------------------------------------------|
| <b>Material</b>                                      | Aluminum                                                 |
| <b>PDF Catalog Page</b>                              | <a href="#">Click HERE to view the web page.</a>         |
| <b>Plating</b>                                       | No                                                       |
| <b>Inhibitor</b>                                     | Yes                                                      |
| <b>Die Index</b>                                     | 840 (249)                                                |
| <b>Number of Pad Holes</b>                           | 1                                                        |
| <b>Pad Bolt Diameter</b>                             | 0.50 in (12.7 mm)                                        |
| <b>VersaCrimp Conductor Size Minimum</b>             | .146 in                                                  |
| <b>VersaCrimp Conductor Size Maximum</b>             | .332 in                                                  |
| <b>Die Type Tooling Crimp Conductor Size Minimum</b> | .268 in                                                  |
| <b>Die Type Tooling Conductor Size Maximum</b>       | .332 in                                                  |
| <b>Lug Conductor Type</b>                            | AAAC, AAC, ACAR, ACSR, Compact, CU                       |
| <b>Style</b>                                         | Impact Extruded                                          |
| <b>Spade Holes</b>                                   | 1                                                        |
| <b>Bolt Diameter</b>                                 | 0.50 in (12.70 mm)                                       |
| <b>Crimp Method</b>                                  | VERSAtile (accommodates conventional and Anderson tools) |
| <b>UL Listed</b>                                     | No                                                       |
| <b>Body Material</b>                                 | Aluminum                                                 |
| <b>Dimension D</b>                                   | 1.43 in (36.3 mm)                                        |
| <b>Dimension L</b>                                   | 3.25 in (83 mm)                                          |
| <b>Dimension T</b>                                   | 0.25 in (6 mm)                                           |
| <b>Dimension W</b>                                   | 0.96 in (24.4 mm)                                        |
| <b>UPC Code</b>                                      | 09635933504                                              |
| <b>Standard Package</b>                              | 1                                                        |
| <b>Standard Package Unit</b>                         | Each                                                     |

|                      |              |
|----------------------|--------------|
| <b>Min Order Qty</b> | 25           |
| <b>Weight / Ea.</b>  | 0.196 lbs    |
| <b>Material Type</b> | Non-Standard |

### Notes


Color Code Red. Meets ANSI C119.4 Class A performance on aluminum and ACSR conductor (minimum tension). Meets ANSI C119.4 Class C performance on copper conductor (minimum tension).

### Features

Connectors are prefilled with rubber compatible inhibitor and sealed with color coded end caps. Metal marked to indicate recommended conductors and crimp dies. When used with die type compression tools, use with maximum size conductor only.

### Compressed Product Number

VAULH112

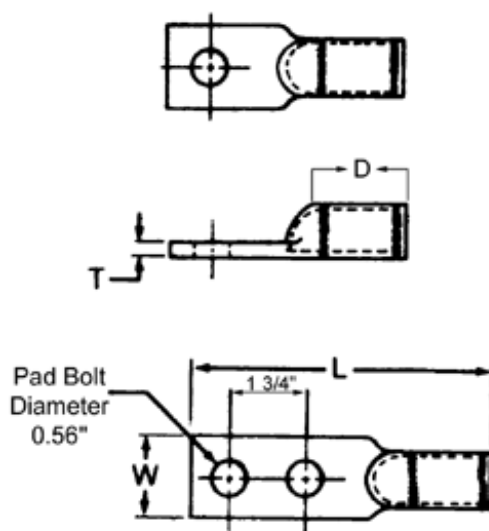

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

*All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.*

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.