



[Catalog Home](#)

Product Datasheet



ANDERSON FARGO

GD411 -- Aluminum Automatic Dead End



Aluminum Automatic Dead End, AAC, AAAC, ACSR Conductor .659 - .724" (16.74 - 18.39 mm), Flex Bail

Product Specifications

<p>Category Image</p>	 <p>Automatic Deadends</p> <p>Copper and Aluminum AAC, AAAC, ACAR, ACSR, Copper & Copperweld® Conductor</p>
<p>Series Image (Automatic)</p>	 <p>GD-400 Series</p> <p>Automatic Dead End</p> <p>Flex Bail</p> <p>AAC, AAAC & ACSR Conductor</p>
<p>PDF Catalog Page</p>	<p>Click HERE to view the web page.</p>
<p>Bail Option</p>	<p>Flex Bail</p>
<p>Type</p>	<p>Automatic</p>
<p>Material</p>	<p>Aluminum</p>
<p>Inhibitor Loaded</p>	<p>Yes</p>
<p>Shell Material</p>	<p>High Strength Aluminum Alloy</p>
<p>Bail Material</p>	<p>Stainless Steel</p>
<p>Assembly Rating (Ultimate)</p>	<p>Maximum Design Rating 10,000 lb (4,535 kg)</p>
<p>Dimension A</p>	<p>17.7 in</p>
<p>Dimension B</p>	<p>10.5 in</p>
<p>Dimension C</p>	<p>2.0 in (50 mm)</p>
<p>Diameter Range</p>	<p>.659 - .724 in (16.74 - 18.39 mm)</p>
<p>Color Code</p>	<p>Green</p>
<p>Conductor Range Minimum - Maximum</p>	<p>AAC 336.4 kcmil (19) Thru AAC 350 kcmil (37) AAAC 394.6 kcmil str (19) ACSR 211.3 kcmil (12/7) Thru ACSR 336.4 kcmil (26/7)</p>
<p>Minimum Conductor Diameter</p>	<p>0.659</p>
<p>Maximum Conductor Diameter</p>	<p>0.724</p>


Weight / Ea.	9.09 lbs
Standard Package	10
UPC Code	09635930886

Notes

Add "N" suffix for Neoprene coated bail.

Compressed Product Number

GD411

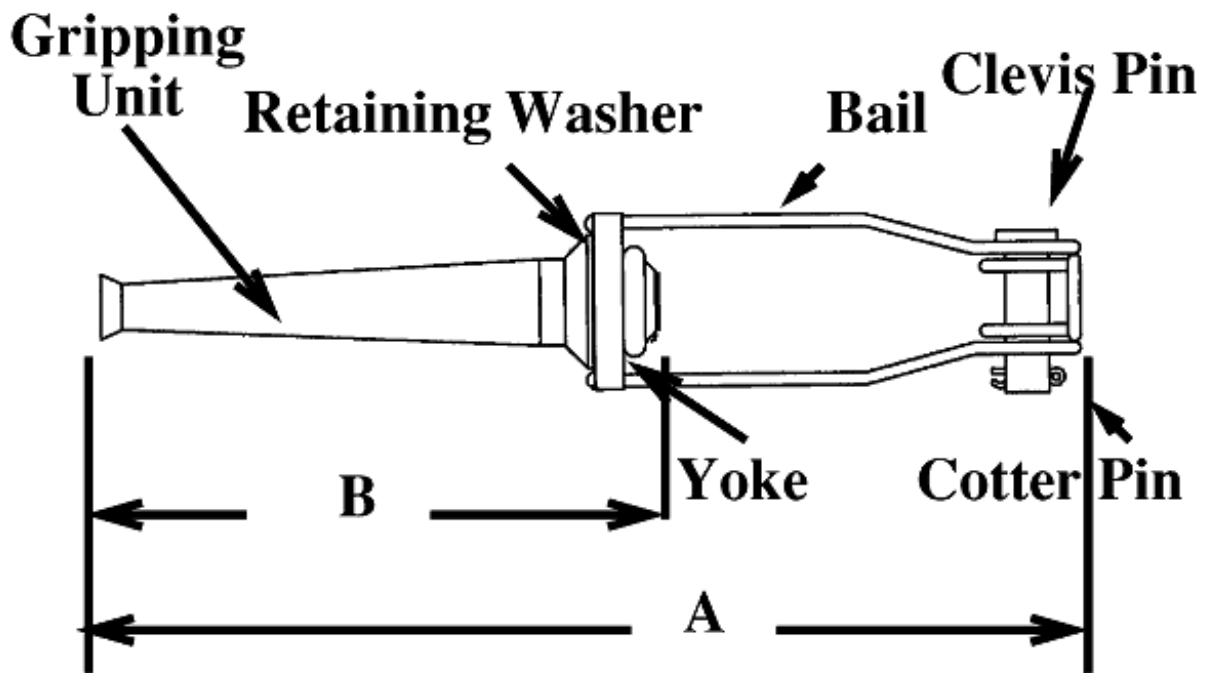

Dimensions

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.