


Compact Enclosed

**E6/V6 Compact Enclosed Switches\***

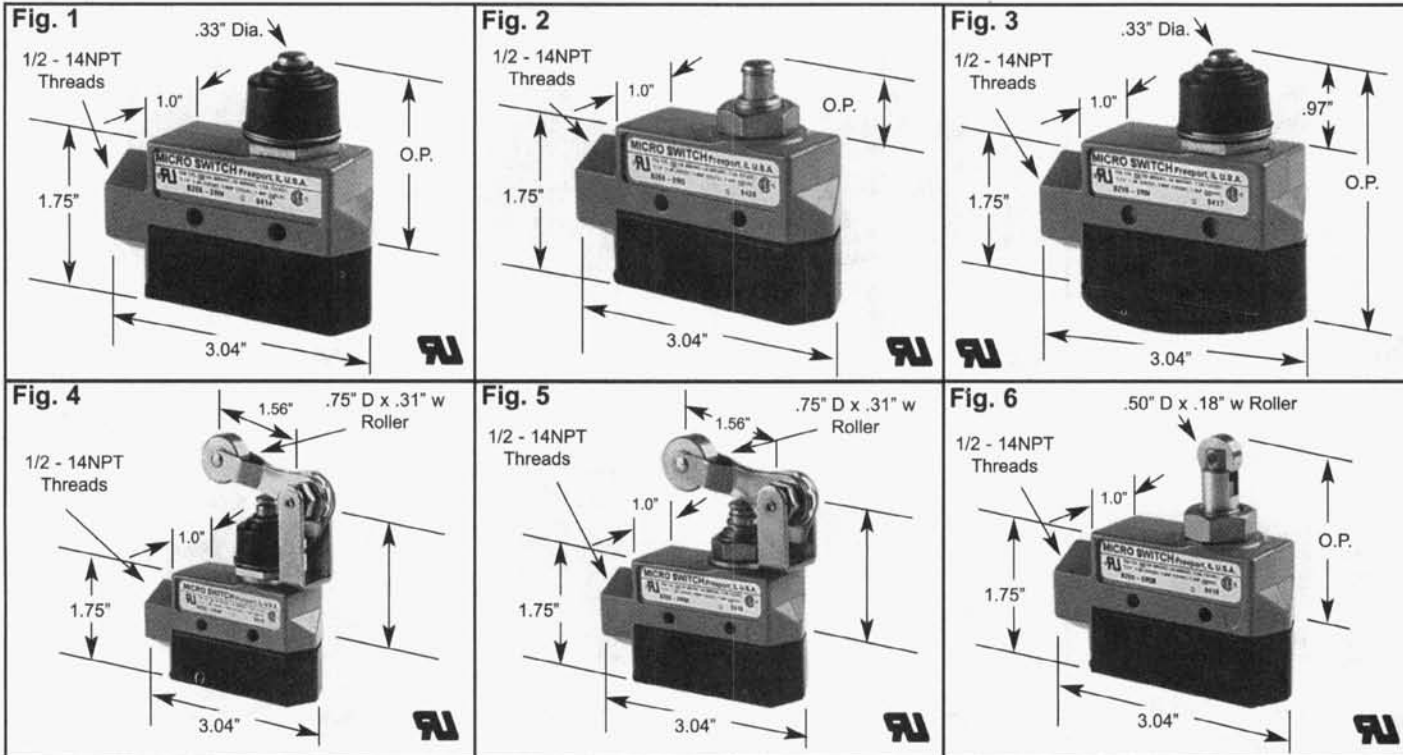

Actuator Style	Ratings	Mounting	O.F. (Oz)	P.T. Max (Inches)	O.T. Min. (Inches)	D.T. Max (Inches)	O.P. (Inches)	Part Number	Fig. No.
Roller Lever	10 Amps <sup>2</sup>	Side	10 - 30	.266	.219	.165	----	DTE6-2RN2	4
Roller Lever	15 Amps <sup>1</sup>	Side	10 - 18	.188	.219	.006	----	BZE6-2RQ2	5
Roller Lever***	15 Amps <sup>1</sup>	Side	10 - 20	.188	.219	.006	----	BZE6-2RN2	4
Roller Lever***	15 Amps <sup>1</sup>	Flange*	10 - 20	.188	.219	.006	----	BZV6-2RN2	4**
Roller Plunger	15 Amps <sup>1</sup>	Side	9 - 13	.015	.140	.002	1.953.045	BZE6-2RQ8	6
Roller Plunger	15 Amps <sup>1</sup>	Flange	9 - 13	.015	.140	.002	2.953±.060	BZV6-2RQ8	6
Roller Plunger	15 Amps <sup>1</sup>	Side	9 - 13	.015	.219	.002	1.953±.045	BZE6-2RQ9	6
Roller Plunger***	15 Amps <sup>1</sup>	Side	9 - 24	.078	.219	.002	2.232±.045	BZE6-2RN80	6
Straight Plunger***	10 Amps <sup>2</sup>	Side	26 - 59	.110	1.25	.060	1.812±.030	DTE6-2RN	1
Straight Plunger	15 Amps <sup>1</sup>	Side	9 - 13	.015	.219	.002	1.500±.030	BZE6-2RQ	2
Straight Plunger***	15 Amps <sup>1</sup>	Side	9 - 24	.078	.219	.002	1.179±.030	BZE6-2RN	1
Straight Plunger***	15 Amps <sup>1</sup>	Side	9 - 24	.078	.219	.002	1.719±.030	BZE6-2RN7	1
Straight Plunger	15 Amps <sup>1</sup>	Flange*	9 - 24	.078	.219	.002	2.720±.060	BZV6-2RN	3

Rating	Circuitry	Electrical Rating
1	Single-Pole, Double Throw	UL/CSA Rating: L74 15 Amps, 125, 250 or 480 VAC; 2 Amps, 600 VAC 1/8 Hp, 125 VAC; 1/4 Hp, 250 VAC; 1/2 Amp, 125 VDC; 1/4 Amp, 250 VDC
2	Double-Pole, Double-Throw	UL/CSA Rating: L59 10 Amps, 125 or 250 VAC; 0.3 Amp, 125 VDC; 0.15 Amp, 250 VDC.

**CHARACTERISTICS:**

O.F. - Operating Force; R.F. - Release Force; P.T. - Pretravel; O.T. - Overtravel; D.T. - Differential Travel; O.P. - Operating Position.

\* The mounting holes on the above switches are 1 inch apart for side mount and 1.63" apart (.17" Dia. holes) for flange mount.

\*\* BZV6-2RN2 is flanged mount.

\*\*\* With Seal Boot

**Mounting Hole Dimension:**

