



Steel City

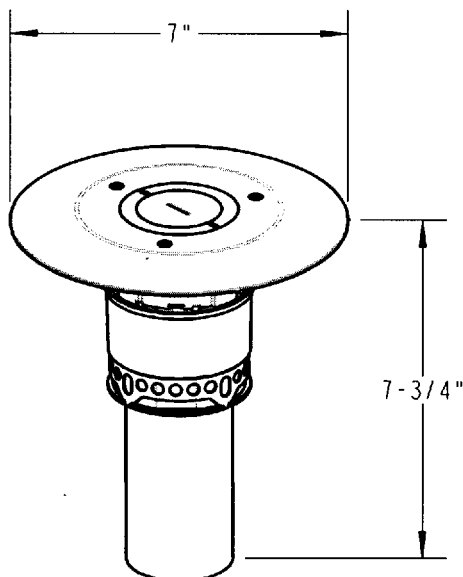

2" & 1-1/4"
CONCENTRIC
THREADED HUB



TOP VIEW
OF COVER

* CATALOG NUMBERS:

FFPT3-BRS

FFPT3-ALM

FFPT3-BLK

FFPT3 (BASE UNIT ONLY: COVER PURCHASED SEPARATELY)

COMPLETE FIRE RATED POKE-THROUGH ASSEMBLY
WITH:

- (1) 2" & 1-1/4" PLUGS
- (1) FACTORY INSTALLED TEMPORARY COVER
- (1) ALL METAL COVER IN BRUSH-FINISH BRASS OR ALUMINUM, OR BLACK FINISH.

SEE DRAWING WSD-000343 FOR COVER DETAILS.
OTHER COLORS AVAILABLE WHEN COVER AND FFPT3
BASE UNIT ARE PURCHASED SEPARATELY.

SPECIFICATIONS / FEATURES:

1. ALL METAL CONSTRUCTION WITH INTUMESCENT MATERIAL (FIRE RETARDANT).
2. CORE-DRILLED HOLE SIZE: 3" TO 3-1/16" DIAMETER.
3. UL LISTED AND CLASSIFIED. MEETS OR EXCEEDS UL AND CANADIAN SAFETY STANDARDS.
4. FIRE RATING AND CONCRETE THICKNESS MIN/MAX.:
FOR USE IN 1, 1-1/2 AND 2-HOUR RATED FLOORS
1-HOUR RATED FLOOR:
2-1/4" MIN. CONCRETE FOR OVER STEEL DECKING
3" MIN. CONCRETE FOR REINFORCED SLAB
7-1/2" MAX. CONCRETE
2-HOUR RATED FLOOR:
3-1/4" MIN. CONCRETE OVER STEEL DECKING
4" MIN. CONCRETE FOR REINFORCED SLAB
7-1/2" MAX. CONCRETE
5. FLOOR COVERINGS:
FOR USE ON CARPET AND WOOD COVERED CONCRETE FLOORS, TILE FLOOR COVERINGS UP TO 3/4" MAX. THICKNESS, AND LINOLEUM FLOOR COVERINGS UP TO A MAXIMUM OF 1/8" THICKNESS.
POKE-THROUGH MAY BE INSTALLED DIRECTLY ON CONCRETE IF NO FINISHED FLOOR IS PLANNED.
6. 2" EMT CONDUIT FOR POWER OR COMMUNICATION
- * 7. ALL FFPT3 SERIES POKE-THROUGHS ARE APPROVED FOR CITY OF CHICAGO



GENERAL NOTES

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [] ARE IN METRIC UNITS.

REVISIONS

- SEE ERN (****) FOR APPROVAL SIGNATURES & RELEASE DATE.
PROJECT NO: ****

Thomas & Betts
www.tnb.com

DESCRIPTION: **FFPT3-XXX FURNITURE FEED POKE-THROUGH ASSEMBLY**
XXX - DENOTES COVER MATERIAL OR FINISH

ORIGINAL PROJECT NO / (ERN NO)

UD55637 / [2008144]

SHEET NO:

1 OF 1

REV. NO:

-

DRAWING NO:

WSD-000341