



**POWER
SYSTEMS, INC.**

In the world of power transmission and distribution, look to Hubbell.


**Interactive
eCatalog**

Catalog Home

Product Datasheet

ANDERSON FARGO


VCJS832R -- Partial Tension Compression Splice

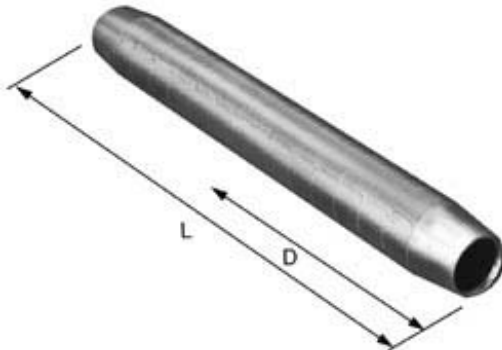

Partial Tension VersaCrimp Aluminum Compression Splice

Product Specifications

Splice Type

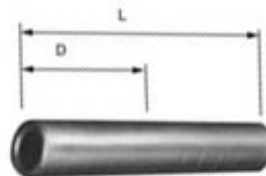

VERSA-CRIMP®
Compression Splices
(For use with
VersaCrimp and other
Dieless Type Tools)

Versacrimp Compression Series



VCJS-R Series
Compression Splice
VERSA-CRIMP®
Partial Tension
AAC or AAAC Conductor

PDF Catalog Page

[Click HERE to view the web page.](#)

VersaCrimp Conductor Size Minimum

0.856 in

VersaCrimp Conductor Size Maximum

0.94 in

Material

Aluminum

VersaCrimp Conductor Range

477 (26/7) - 636 (18/1, 36/1) ACSR, 556.5 (37) - 636 (37) AAC

VersaCrimp Conductor Minimum

.856 in

VersaCrimp Conductor Maximum

.940 in

Dimension D

6.38 in (162 mm)

Dimension L

12.88 in (327 mm)

Length before Compression

12.88 in (327 mm)

Compression Method

VC8, VersaCrimp Tooling ONLY

UL Listed	No
Inhibitor Loaded	Yes
Material Type	Non-Standard
UPC Code	09635933677
Standard Package	15
Standard Package Unit	Each
Min Order Qty	15
Weight / Ea.	1.274 lbs

Notes

For AL, compact, 5005, 6201 and ACAR partial tension (40% rating) conductor jumper splicing.

Features

For use with VC8 tools.

Compressed Product Number

VCJS832R

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.