

# SNAP<sup>2</sup>IT<sup>®</sup> MC Cable Connectors

*Largest Line. Widest Cable Ranges. Fastest Installation.*



**SAVE  
17 seconds  
per connector**

**LISTED  
SNAP<sup>2</sup>IT<sup>®</sup>  
CONNECTORS FOR  
NEW MC-PCS CABLE**  
...lighting & low voltage  
circuits in the  
same cable



505010AST  
3/4" KO

4010AST  
1/2" KO

5010AST  
1/2" KO

4110ST

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	DESCRIPTION	CABLE OUTSIDE DIA (OD)	UNIT/STD PKG
4010AST	40355	Snap in, 1/2" KO SNAP2IT Type w insulated throat	.405 to .610	50/500
5010AST	00517	Snap in, 1/2" KO SNAP2IT Type w insulated throat	.590 to .920	25/250
505010AST	00520	Duplex Snap in, 3/4" KO SNAP2IT Type w insulated throat	(2) .590 to .920	25/25
4110ST	00728	Snap in, 1/2" KO SNAP2IT Type	.525 to .705	50/500
414110ST	00729	Duplex Snap in, 1/2" KO SNAP2IT Type	(2) .525 to .640	25/100

**In Stock  
Available  
NOW!**

Arlington's zinc diecast SNAP<sup>2</sup>IT<sup>®</sup> fittings are the *easiest to insert* snap-on connectors. And they handle the widest variety of cables!

- **Easiest installation**  
New and improved design delivers the easiest cable insertion.
- **Widest total cable ranges**  
Our Snap<sup>2</sup>It<sup>®</sup> connector line accommodates cables from 1/4/2 to 3/3.
- **Widest variety of cables**  
For AC, MC, HCF, MC continuous corrugated aluminum cable, MCI-A cables (steel and aluminum), AC90, ACG90.

*These FIVE Snap2It connectors fit the NEW MC-PCS CABLE (lighting and low voltage circuits in same cable) and offer the GREATEST TIME-SAVINGS.*

- Super-secure installation in new work or retrofit
- Connector is removable, reusable
- Fully assembled – Ready to use
- Concrete-tight when taped

**Easiest cable  
insertion.  
NO TOOLS!  
Secure hold.**



**Arlington**  
[www.aifittings.com](http://www.aifittings.com)

*Check that the cable's outer diameter (OD) listed by the cable manufacturer is within the OD cable range listed for the fitting. The cable jacket should never be able to go through the end stop (of fitting).*



# SNAP2IT<sup>®</sup> MC Cable Connectors

## Largest Line. Widest Cable Ranges. Fastest Installation.

### Snap2It Connectors with Insulated Throat and Angled Two-prong Clip

Our 3810AST through 7510AST SNAP2IT<sup>®</sup> connectors install just as fast and cost the same as our other Snap2It fittings, but **cable insertion is even easier!**

- **Easy installation** snap cable into fitting – assembly into box...No tools!
- Angled clip locks onto MC cable – No pullout
- **Removal, reusable**  
From cable: Loosen screw on top of connector. Pull cable out.  
From box: Slip screwdriver under Snap-Tite ring and twist (photo on back).



### 4010AST Exploded View/Components


- Screw holds clip permanently in place – Loosen to remove cable
- Angled, two-prong clip locks down on cable, holding it securely in place










Patented

### 7510AST Back view

- Angled, heavy-duty two-prong clip holds large cables securely in place



# LARGER SIZES

CATALOG NUMBER	UPC/DCI/NAED MFG. #01 8997	CABLE (OD) OUTSIDE DIAMETER	CABLE TYPE	CABLE SIZES	UNIT PKG	STD PKG
<b>3810AST</b> 	00385	.370 to .510	<b>For steel and aluminum:</b> MC/HCF/AC <b>NEW</b> MC-PCS MCI-A	14/2 and 12/2 with and w/o ground; 14/3 and 12/3	50	500
		.450 to .480	AC90, ACG90	14/2, 14/3, 12/2, 12/3		
<b>383810AST</b> Duplex 	10937		Flexible metal conduit (regular and reduced wall)	3/8" Flex* .560 to .610	25	100
<b>4010AST</b> 	40355	.405 to .610	<b>For steel and aluminum:</b> MC/HCF/AC <b>NEW</b> MC-PCS	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3	50	500
		.405 to .580	MCI-A			
<b>404010AST</b> Duplex 	40533	.460 to .550	AC90, ACG90	Flexible metal conduit (regular and reduced wall)	25	100
<b>5010AST</b> 1/2" KO 	00517	.590 to .780	<b>For steel and aluminum:</b> MC/HCF/AC <b>NEW</b> MC-PCS	10/3, 10/4, 8/2, 8/3, 8/4 6/2, 6/3	25	250
		.610 to .780	MCI-A			
		.650 to .850	AC90, ACG90	10/3, 10/4, 8/2, 8/3		
<b>505010AST</b> Duplex 3/4" KO 	50720		Flexible metal conduit (regular and reduced wall)	1/2" Flex* .860 to .920	25	25
<b>7510AST</b> 3/4" KO 	55090	.895 to 1.110	<b>For steel and aluminum:</b> MC/HCF/AC MCI-A	8/4, 6/4, 6/3	25	25
		.900 to .970	AC90	6/3, 4/4, 4/3, 3/3		
			Flexible metal conduit (regular and reduced wall)	3/4" Flex* 1.045 to 1.105		

Check that the cable's outer diameter (OD) listed by the cable manufacturer is within the OD cable range listed for the fitting. The cable jacket should never be able to go through the end stop (of fitting.) \*CSA Listed w/ anti-short bushing ONLY



# Single (Straight & 90 degree) • Duplex

## for New Work and Retrofit

### 90 Degree Snap2It® Connectors

Arlington's snap in connectors save time by eliminating the multiple steps required for a 90 degree 2-screw connector. **And they COST THE SAME AS A TWO-SCREW, 90 degree connector.**




CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	CABLE TYPE	CABLE (OD) OUTSIDE DIAMETER	CABLE SIZES	UNIT PKG	STD PKG
38900ST	04098	<b>NEW...MC-PCS CABLE</b>	.405 to .605			
		<b>MC/HCF/AC Steel &amp; Aluminum</b>	.405 to .605	14/2 and 12/2 w/ and w/o ground	25	250
38900AST with insulated throat	04093	<b>MCI-A Steel &amp; Aluminum</b>	.440 to .550	14/3, 14/4, 12/3, 12/4, 10/2, 10/3	25	250
		<b>AC90, ACG90</b>	.440 to .550			
		<b>Flexible Metal Conduit Steel &amp; Aluminum (RWFMC)</b>	3/8" Flex* .560 to .610			

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	CABLE TYPE	CABLE (OD) OUTSIDE DIAMETER	CABLE SIZES	UNIT PKG	STD PKG
40900ST	04099	<b>NEW...MC-PCS CABLE</b>	.405 to .605			
		<b>MC/HCF/AC Steel &amp; Aluminum</b>	.485 to .610	14/3, 12/2 and 12/3 w/ and w/o ground	25	250
40900AST with insulated throat	04092	<b>MCI-A Steel &amp; Aluminum</b>	.480 to .580	14/4, 12/4, 10/2, 10/3	25	250
		<b>AC90, ACG90</b>	.480 to .550			
		<b>Flexible Metal Conduit Steel &amp; Aluminum (RWFMC)</b>	3/8" Flex* .560 to .610			


\*CSA Listed w/ anti-short bushing ONLY




for use in **INSTALLED BOXES • RETROFIT**

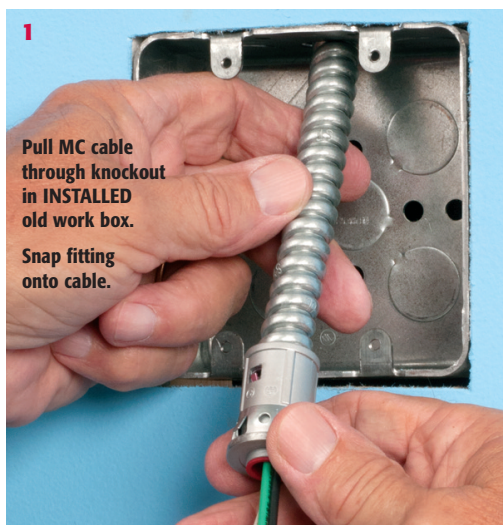

**1**  
Pull MC cable through knockout in **INSTALLED** old work box.  
Snap fitting onto cable.



**2**  
Push assembly into box...



**3**  
...snap it into the box.  
Fast and easy. No tools required!

Arlington's one-piece **RETROFIT SNAP<sup>2</sup>IT<sup>®</sup>** fittings are *easy to use in OLD WORK installations*. They're ideal for adding additional circuits to a load center. And you get the same time-savings in a retrofit installation as you do in new work!

Quick, easy installation – **NO TOOLS** required.

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	CABLE TYPE	CABLE (OD) OUTSIDE DIA	CABLE SIZES	UNIT/STD PKG
38RAST with insulated throat	13586	<b>MC/HCF/AC Steel &amp; Aluminum</b>	.405 to .605	14/2 and 12/2 w/ and w/o ground	25
		<b>MCI-A Steel &amp; Aluminum</b>	.440 to .550	14/3, 14/4, 12/3, 12/4, 10/2, 10/3	
		<b>AC90, ACG90</b>	.440 to .550		
		<b>Flexible Metal Conduit Steel &amp; Aluminum (RWFMC)</b>	3/8" Flex* .560 to .610		
40RAST with insulated throat <b>Tinted RED inside fitting</b>	13587	<b>MC/HCF/AC Steel &amp; Aluminum</b>	.485 to .610	14/3, 12/2 and 12/3 w/ and w/o ground	25
		<b>MCI-A Steel &amp; Aluminum</b>	.480 to .580	14/4, 12/4, 10/2, 10/3	
		<b>AC90, ACG90</b>	.480 to .550		
		<b>Flexible Metal Conduit Steel &amp; Aluminum (RWFMC)</b>	3/8" Flex* .560 to .610		

\*CSA Listed w/ anti-short bushing ONLY



Check that the cable's outer diameter (OD) listed by the cable manufacturer is within the OD cable range listed for the fitting. The cable jacket should never be able to go through the end stop (of fitting.)



# SNAP<sup>2</sup>IT<sup>®</sup> MC Cable Connectors

for NEW WORK

## Snap2It<sup>®</sup> Connectors

Designed for new construction, this SNAP<sup>2</sup>IT<sup>®</sup> series offers quick, easy snap-in installation into cable and into box. NO TOOLS required.


SAVE <sup>about</sup> 17 seconds per connector!

CATALOG NUMBER	UPC/DCI/NAED MFG #01 8997	CABLE TYPE	CABLE (OD) OUTSIDE DIA	CABLE SIZES	UNIT/STD PKG
<b>* WITH INSULATED THROAT</b>					
		<b>NEW...MC-PCS CABLE</b>	.405 to .612	14/2 and 12/2	25
<b>38AST *</b>	00070	<b>MC/HCF/AC Steel &amp; Aluminum</b>	.405 to .612	w/ and w/o ground	25
<b>380ST</b>	00381	<b>MCI-A Steel &amp; Aluminum</b>	.405 to .612	14/3, 14/4,	25
<b>380AST *</b>	00382	<b>AC90, ACG90 Flexible Metal Conduit Steel &amp; Aluminum (RWFMC)</b>	.405 to .612 .560 to .610	12/3, 12/4, 10/2, 10/3	25
<b>WITH INSULATED THROAT, TINTED RED INSIDE OPEN TANG DESIGN</b>					
		<b>NEW...MC-PCS CABLE</b>	.485 to .610	14/3, 12/2 and 12/3	
<b>40AST</b>	00041	<b>MC/HCF/AC Steel &amp; Aluminum</b>	.485 to .612	w/ and w/o ground	25
<b>400AST</b>	40347	<b>MCI-A Aluminum</b>	.485 to .612	14/4,	25
		<b>AC90, ACG90 Flexible Metal Conduit Steel &amp; Aluminum (RWFMC)</b>	.560 to .610	12/4, 10/2, 10/3	

\*\*Flex CSA Listed w/ anti-short bushing ONLY



1 Snap fitting onto cable... twist clockwise



2 ...snap assembly into the box!

## EASY TO INSTALL

**EASY TO REMOVE and REUSE...**



To remove from box, lift Snap-Tite<sup>®</sup> ring with a screwdriver and twist off.

## PRODUCT COMPARISON



**RED TINT inside means OPEN TANG Design**


More room inside for easy insertion of wires...redesigned snap ring makes it easier than ever to snap fitting into box



38AST



40AST RED Tint inside



Check that the cable's outer diameter (OD) listed by the cable manufacturer is within the OD cable range listed for the fitting. The cable jacket should never be able to go through the end stop (of fitting.)

## Arlington

1 Stauffer Industrial Park  
Scranton, PA 18517  
800/233.4717  
Fax 570/562.0646  
www.aifittings.com

Patented ©2015 Arlington 0415\_100/25M

DISTRIBUTED BY

