




**Product Datasheet**


**ANDERSON FARGO**

**JTF08 -- Compression Terminal**

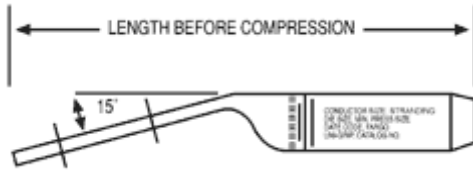

Compression Terminal, Uni-Grip, Jumper Terminal, 15 degree, Conductor Range, Range 0.681-0.765

**Product Specifications**

<p>Series</p>	 <p><b>JTF Series</b></p> <p>Compression Terminal 15 degree, Partial Tension AAC, AAAC, ACAR &amp; ACSR Conductor</p>
<p>PDF Catalog Page</p>	<p><a href="#">Click HERE to view the web page.</a></p>
<p>Conductor Range (in)</p>	<p>0.681-0.765</p>
<p>Length before Compression</p>	<p>8.8 in (223 mm)</p>
<p>Pad Width</p>	<p>1.7 in (44 mm)</p>
<p>Pad Holes</p>	<p>2</p>
<p>Compression Method</p>	<p>Uni-Grip (single die)</p>
<p>Material &amp; Connection Method</p>	<p>Aluminum Compression</p>
<p>Die Size</p>	<p>08CD</p>
<p>Minimum Press (Tons)</p>	<p>12</p>
<p>Voltage Application</p>	<p>Std</p>
<p>Inhibitor Loaded</p>	<p>Yes</p>
<p>Conductor Minimum - Maximum Range</p>	<p>AAC 350 kcmil (37) thru AAC 400 kcmil (19) ACSR 336.4 kcmil (18/1) thru ACSR 397.5 kcmil (18/1)</p>
<p>Material Type</p>	<p>Non-Standard</p>
<p>UPC Code</p>	<p>09635938408</p>
<p>Standard Package</p>	<p>6</p>
<p>Standard Package Unit</p>	<p>Each</p>
<p>MOQ</p>	<p>1</p>
<p>Weight / Ea.</p>	<p>0.755 lbs</p>

**Notes**


To specify stainless steel hardware add "SS" suffix to catalog number.

**Features**

Jumper terminals are prefilled with inhibitor. Taper and pad are coated with protective strippable plastic and bore is capped. Tongue holes have NEMA spacing. Standard hardware includes one Aluminum 1/2-13 bolt, nut and two aluminum washers per .56 diameter hole.

**Compressed Product Number**

JTF08

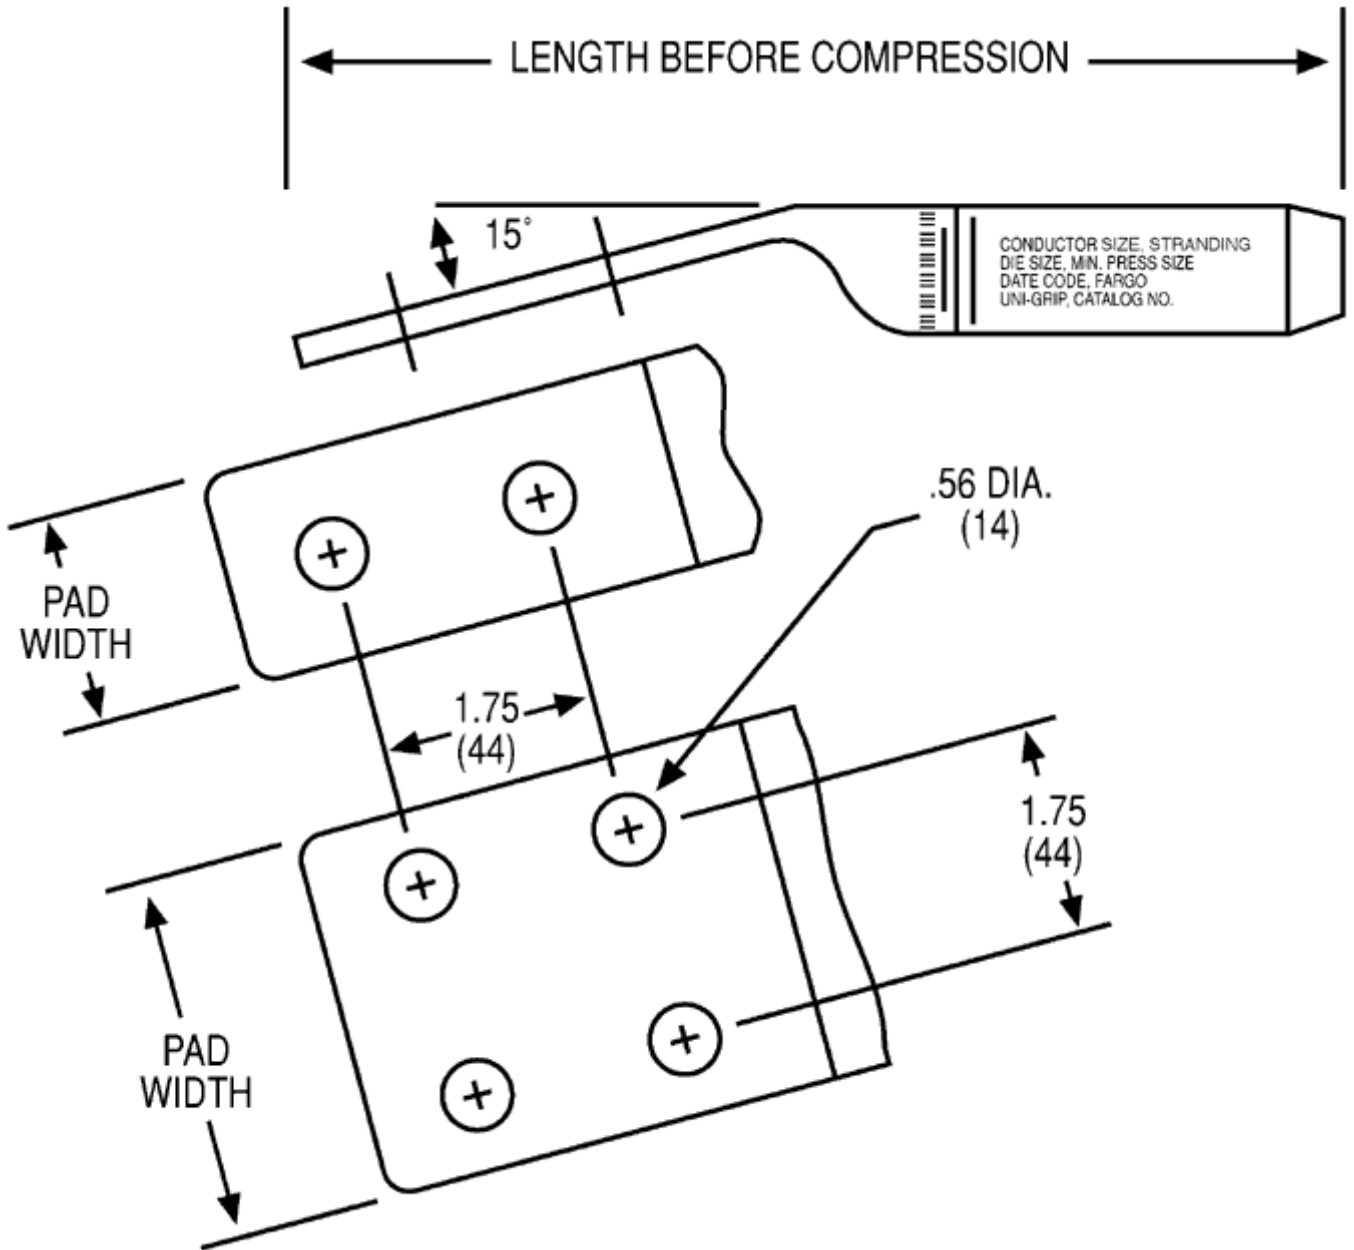

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

*All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.*

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.