


Features

- Eliminates the need to loop the wire
- External back-wire clamp for fast and easy installation of 15A & 20A branch circuits in residential applications
- Compression plates maximize holding power to provide a stronger, more secure connection
- Terminate up to 8 wires
- Accomodates #12 & #14 AWG wire
- Break-off tabs for switched receptacle applications
- Tamper-resistant shutter complies with NEC®

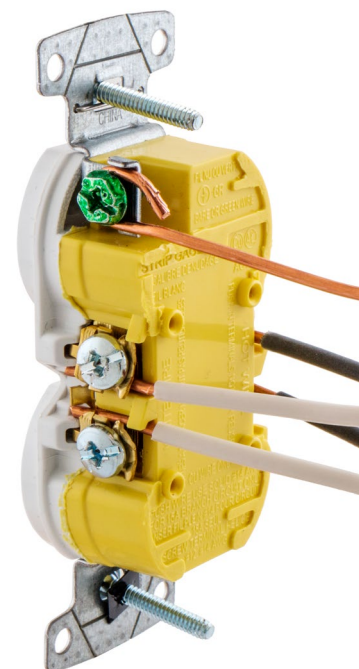

External Clamping

- 1** Strip the wire
- 2** Insert the wire
- 3** Clamp the connection

**Best Solution
for Residential
15A & 20A Branch
Circuit Wiring**

Fast and Secure


XClamp Duplex Receptacles

Description	Color	Catalog Number	Listings
Tamper-Resistant, 15A 125V, 2 Pole, 3 Wire Grounding, 20A Circuit Rated.	Ivory Light Almond White	RR15SITRX RR15SLATRX RR15SWTRX	UL Listed to UL498 File No. E2186 Certified to CSA C22.2, No. 42 NEMA® WD-6 Compliant



RR15SWTRX

Duplex Receptacles, 2 Pole, 3 Wire

Description				
	Tamper-Resistant, Quick Thread.	Standard.	Weather and Tamper-Resistant.	Tamper-Resistant.
Termination	Self-Grounding, Push and Side Wire	Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire	Self-Grounding, Push and Side Wire
Rating	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R	15A 125V NEMA 5-15R
Black	—	RR15BK	RR15SBKWRTR	RR15SBKTR
Brown	—	RR15	RR15SWRTR	RR15STR
Gray	—	—	RR15SGYWRTR	—
Ivory	RR15QITR	RR15I	RR15SIWRTR	RR15SITR
Light Almond	RR15QLATR	RR15LA	RR15SLAWRTR	RR15SLATR
White	RR15QWTR	RR15W	RR15SWWRTR	RR15SWTR

Note: See page Tech-10 for Weather and Tamper-Resistant descriptions.



RR15W



RR15QWTR

Dimensions in Inches (mm)