




GE
Lighting

72548 - 200PS30RS/23/STG

GE saf-t-gard® 200/177 watt PS30 1-pack

- 130/120 volts
- GE saf-t-gard® bulbs feature a protective Teflon® coating that helps contain glass fragments if broken. Designed with heavy-duty, all-weather construction, these bulbs protect against shattering, rain breakage and splatter from oil and lubricants. GE saf-t-gard® bulbs are perfect for home use in kitchens, basements garages, workshops and enclosed exterior fixtures
- Lasts 0.9/2.4 years based on 3 hours per day usage
- Estimated yearly energy costs \$24.09/\$21.32 based on 3 hours per day \$0.11 per kWh
- Provides 3240/2495 lumens
- PS30 shape with medium base for use in rough service applications

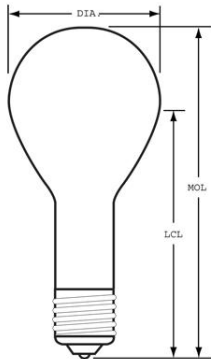

GENERAL CHARACTERISTICS

Lamp Type	Incandescent - A-line
Bulb	PS30
Base	Medium Screw
Filament	C-9
Bulb Finish	Inside frost
Rated Life	1000.0 hrs
Primary Application	Rough Service; Shatter-Resistant

PHOTOMETRIC CHARACTERISTICS

Initial Lumens	3100.0 /2495.0
Nominal Initial Lumens per Watt	16 /14

ELECTRICAL CHARACTERISTICS

Wattage	200.0
Voltage	130.0

DIMENSIONS

Maximum Overall Length (MOL)	8.0600 in(204.7 mm)
Bulb Diameter (DIA)	2.375 in(60.3 mm)
Light Center Length (LCL)	6.000 in(152.4 mm)

PRODUCT INFORMATION

Product Code	72548
Description	200PS30RS/23/STG
Standard Package	Case
Standard Package GTIN	10043168725481
Standard Package Quantity	60
Sales Unit	Unit
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	60
UPC	043168725484