


# Eaton XTCEXFACC22

Catalog Number: XTCEXFACC22

Contactor Accessory - Auxiliary Contact, Four-pole, Spring cage terminals, 2NO-2NC contact configuration, 16A conventional thermal rating, 6A at 220/230/240V, 3A at 380/400/415V, 1.5A at 500V rated operational voltage, Front mounting,

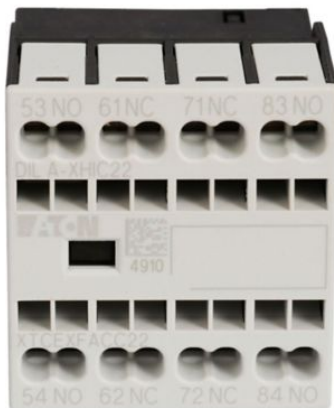

## General specifications

<b>Product Name</b>	<b>Catalog Number</b>
Eaton motor control auxiliary contact	XTCEXFACC22
<b>EAN</b>	<b>Product Length/Depth</b>
4015082765323	1.5 in
<b>Product Height</b>	<b>Product Width</b>
1.5 in	2 in
<b>Product Weight</b>	<b>Warranty</b>
0.05 lb	Not Applicable
<b>Compliances</b>	<b>Certifications</b>
CE Marked	IEC 60947
CCC Marked	EN 60947
ATEX Compliant	UL Listed
	CSA Certified

## Catalog Notes

Interlocked opposing contacts, to IEC/EN 60947-5-1 Annex L (positively driven), within the auxiliary contact modules (not NOE and NCL contacts) and between the auxiliary contacts and built-in contacts of the XTRE control relays.

## defaultTaxonomyAttributeLabel

### Number Of Poles

Four-pole

### Type

Contactory Accessory - Auxiliary Contact

### Used with

XTRE control relays

### Terminals

Spring cage

### Contact configuration

2 NO-2 NC

### Mounting method

Front

### Rated operational current

6A at 220/230/240V; 3A at 380/400/415V; 1.5A at 500V

### Conventional thermal current

16A

### Quantity

5

## Resources

### Catalogs

[Eaton's Volume 5—Motor Control and Protection](#)

### Specifications and datasheets

[Global Data Sheet - XTCEXFACC22](#)

[Eaton Specification Sheet - XTCEXFACC22](#)



Eaton Corporation plc  
Eaton House  
30 Pembroke Road  
Dublin 4, Ireland  
Eaton.com  
© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



[Eaton.com/socialmedia](https://www.eaton.com/socialmedia)