



[Catalog Home](#)

Product Datasheet


ANDERSON FARGO

CFS213N -- Suspension Clamp




Suspension Clamp, Aluminum, EHV or Std Voltage, for use with conductors 1.8 - 2.13 with fitting: None

Product Specifications

| | |
|--|--|
| <p>Series</p> |  <p>CFS & CFSHT series EHV or Standard Voltage, Aluminum & High-Temp Aluminum</p> |
| <p>PDF Catalog Page</p> | <p>Click HERE to view the web page.</p> |
| <p>Fitting</p> | <p>None</p> |
| <p>Clamp Material</p> | <p>Aluminum</p> |
| <p>Fitting Catalog No.</p> | <p>-</p> |
| <p>Ultimate Body Strength</p> | <p>25,000 lbs (11,340 kgs)</p> |
| <p>Maximum Take-off Angle 0</p> | <p>17.5</p> |
| <p>Dimension H</p> | <p>3.63 in (92.1 mm)</p> |
| <p>Dimension J</p> | <p>0.625 in (15.9 mm)</p> |
| <p>Dimension L</p> | <p>11.0 in (279 mm)</p> |
| <p>Dimension W</p> | <p>2.31 in (58.8 mm)</p> |
| <p>Dimension PD</p> | <p>0.625 in (15.9 mm)</p> |
| <p>Hardware Material</p> | <p>Galvanized Steel</p> |
| <p>Minimum - Maximum Conductor Size</p> | <p>AAC 2500 kcmil (91) Thru AAC 1431 kcmil (61) w/Armor Rods ACSR 2312.0 kcmil (76/19) Thru ACSR 1351.5 kcmil (45/7) w/Armor Rods ACAR 2493.0 kcmil (54/37) Thru ACAR 1361.5 kcmil (54/7) w/Armor Rods</p> |
| <p>Clamping Range</p> | <p>1.80 - 2.13 in (45.72 - 54.10 mm)</p> |
| <p>Voltage Application</p> | <p>EHV</p> |
| <p>Material Type</p> | <p>Non-Standard</p> |
| <p>UPC Code</p> | <p>09635929889</p> |
| <p>Standard Package</p> | <p>15</p> |
| <p>Standard Package Unit</p> | <p>Each</p> |
| <p>Min Order Qty</p> | <p>1</p> |
| <p>Weight / Ea.</p> | <p>7.125 lbs</p> |

Compressed Product Number

CFS213N

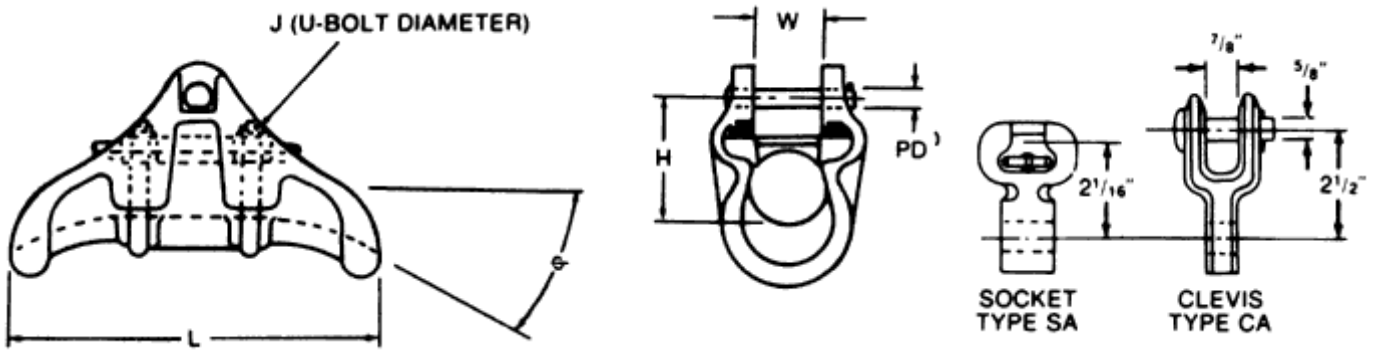

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.