



# Double Ended Linear

## Double Ended Linear 1500T3Q/P/CL 240V 12PK


High-quality white light with superior lumen performance Halogen Double Ended lamps provide bright, white light for work lights and security lighting. Rugged construction for busy work sites. Offered in several lengths to meet most application needs. High lumen output provides light where you need it.

### Product data

General Information		Controls and Dimming	
Cap-Base	R7S [ R7s]	Dimmable	Yes
Operating Position	Horizontal +/- 4 D [ Horizontal +/- 4 D]	<b>Mechanical and Housing</b>	
Nominal Lifetime (Nom)	2000 h	Bulb Finish	Clear (CL)
Switching Cycle	8000X	<b>Approval and Application</b>	
<b>Light Technical</b>		Energy Efficiency Label (EEL)	C
Initial lumen (Nom)	33000 lm	Energy Consumption kWh/1000 h	1500 kWh
Luminous Flux (Rated) (Nom)	33000 lm	<b>Luminaire Design Requirements</b>	
Correlated Color Temperature (Nom)	2900 K	Bulb Temperature (Max)	900 °C
Luminous Efficacy (rated) (Nom)	22 lm/W	Pinch Temperature (Max)	350 °C
Color Rendering Index (Nom)	100	<b>Product Data</b>	
LLMF at End of Nominal Lifetime (Min)	80 %	Order product name	Double Ended Linear 1500T3Q/P/CL 240V 12PK
<b>Operating and Electrical</b>		EAN/UPC - Product	046677132262
Power (Rated) (Nom)	1500.0 W	Order code	132266
Lamp Current (Nom)	6.25 A	Numerator - Quantity Per Pack	1
Starting Time (Nom)	0.0 s	Numerator - Packs per outer box	12
Warm Up Time to 60% Light (Nom)	instant full light	Material Nr. (12NC)	923932245793
Power Factor (Nom)	1	Net Weight (Piece)	0.020 kg
Voltage (Nom)	240 V	ILCOS Code	HDG//RS-1500-240-R7s-250,7

## Double Ended Linear

### Dimensional drawing

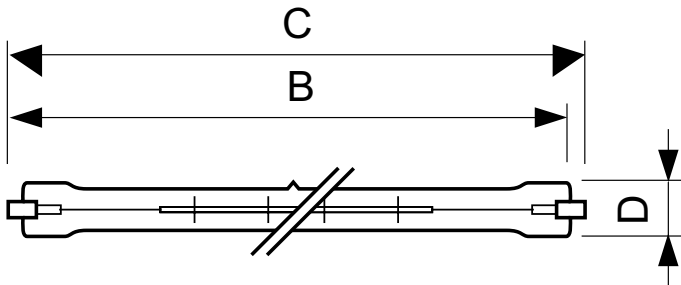

Product	D (max)	B (max)	B	B (min)	C (max)
Double Ended Linear 1500T3Q/P/CL 240V 12PK	11 mm	252.3 mm	250.7 mm	249.1 mm	254.1 mm

DEBig 1500W R7s 240V T11 CL

