


Product availability : Stock - Normally stocked in distribution facility

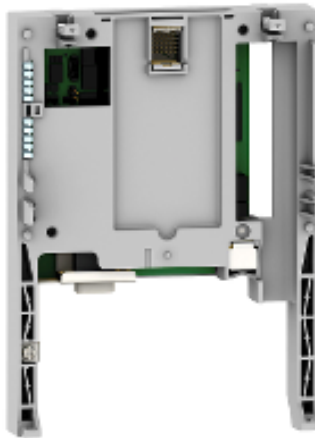

Main

Product or component type	Communication card
Range compatibility	Altivar 61 Altivar 71 Altivar 61Q Altivar 71Q
Communication port protocol	Modbus TCP
Product specific application	For daisy chain mounting
Connector type	1 RJ45
Transmission rate	100 Mbps 10 Mbps
Physical interface	Ethernet 2
Web services	E-mail Security Altivar chart FDR Agent Altivar viewer Ethernet statistics IO Scanner Data editor

Complementary

Exchange mode	Half duplex and full duplex
Communication data link	LLC : IEEE 802.2 MAC : IEEE 802.3
Communication network type	IP conforming to RFC791
Communication transport type	8 connections maximum TCP conforming to RFC793 UDP
Concept	Transparent Ready class C20
Web server	Embedded
Communication service	CiA 402 profile

Communication monitoring can be inhibited, adjustable
 Diagnostics (08)
 FTP
 I/O profile
 I/O scanning service can be inhibited
 Read device identification (43)
 Read holding registers (03)
 Read input registers (04)
 Read/Write multiple registers (23)
 SNMP
 TFTP
 Write multiple registers (16)
 Write single register (06)

Display type	1 LED 10/100 Mbps (speed) 1 LED FLT (Ethernet fault) 1 LED RX (reception) 1 LED STS (IP address) 1 LED TX (transmission) Graphic display terminal control word received Graphic display terminal reference received Web server
Product weight	0.66 lb(US) (0.3 kg)

Ordering and shipping details

Category	22135 - ATV61-71 ACCESSORIES
Discount Schedule	CP4C
GTIN	00785901538646
Nbr. of units in pkg.	1
Package weight(Lbs)	0.65000000000000002
Returnability	Y
Country of origin	ID

Contractual warranty

Warranty period	18 months
-----------------	-----------