

Eaton C25DND225A

Catalog Number: C25DND225A

Eaton definite purpose contactor, Non-reversing contactors and starters (C306), Compact, two-pole , Open with metal mounting plate , Binding head screw and quick connect terminals (side-by-side) ,50A, 110–120 Vac, 50/60 Hz , Global Listed

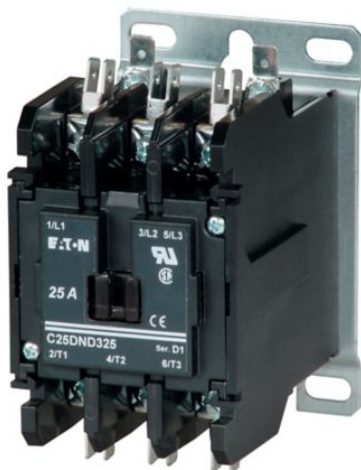


Photo is representative

General specifications

Product Name	Catalog Number
Eaton definite purpose contactor	C25DND225A
UPC	Product Length/Depth
782116300303	3.35 in
Product Height	Product Width
3.75 in	2.4 in
Product Weight	Warranty
1.3 lb	1 year
Certifications	
UL Recognized	
CSA Certified	

defaultTaxonomyAttributeLabel

Amperage Rating

25A

Number Of Poles

Two-pole

Type

Non-reversing

Coil

110-120 Vac, 50/60 Hz

Enclosure

Open with metal mounting plate

Frame size

15-50 A, two-pole and three-pole

Inductive full load

25 A

Model

Contactors

Resistive load

35 A

Terminals

Screw/pressure plate and quick connect terminals (side-by-side)

Connection

Quick

Resources

Catalogs

[Eaton's Volume 5—Motor Control and Protection](#)

Drawings

[C25DND2 AutoCAD 2D Footprint \(mm\)](#)

[C25DND2 3D Model Xchange](#)

[C25DND2 3D Inventor](#)

[C25DND2 AutoCAD 2D Footprint](#)

[C25DND2 2D Drawing Xchange](#)

[C25DND2 2D PDF](#)

Specifications and datasheets

[Eaton Specification Sheet - C25DND225A](#)



Eaton Corporation plc
Eaton House
30 Pembroke Road
Dublin 4, Ireland
Eaton.com
© 2024 Eaton. All Rights Reserved.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



[Eaton.com/socialmedia](https://www.eaton.com/socialmedia)