


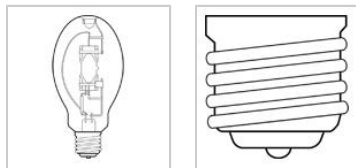
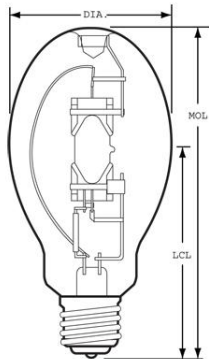


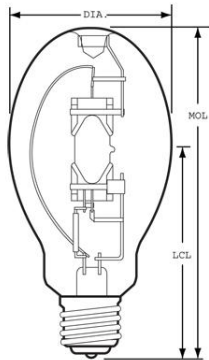

GE  
Lighting

### 72885 - MVR400HOR/ED28PA

GE Multi-Vapor® PulseArc® Quartz Metal Halide ED28

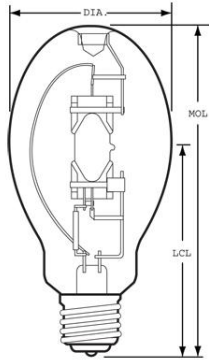

#### GENERAL CHARACTERISTICS

Lamp Type	High Intensity Discharge - Quartz Metal Halide
Bulb	ED28
Base	Mogul Screw (E39)
Bulb Finish	Clear
Rated Life	20000.0 hrs
Lamp Enclosure Type (LET)	Enclosed fixtures only
Base Temperature (MAX)	230.0 °C
Bulb Temperature (MAX)	450.0 °C
LEED-EB MR Credit	94 picograms Hg per mean lumen hour

#### PHOTOMETRIC CHARACTERISTICS

Initial Lumens	38000.0
Mean Lumens	21400.0
Nominal Initial Lumens per Watt	95
Color Temperature	4100.0 K
Color Rendering Index (CRI)	65.0
Effective Arc Length	4.39 in

#### ELECTRICAL CHARACTERISTICS

Wattage	400.0
Burn Position	Horizontal ±75°
Warm Up Time to 90% (MIN)	5.0 min
Warm Up Time to 90% (MAX)	5.0 min
Hot Restart Time to 90% (MIN)	10.0 min
Hot Restart Time to 90% (MAX)	15.0 min

#### DIMENSIONS

Maximum Overall Length (MOL)	8.2500 in(209.5 mm)
Bulb Diameter (DIA)	3.500 in(88.9 mm)
Light Center Length (LCL)	5.000 in(127.0 mm)

#### PRODUCT INFORMATION

Product Code	72885
Description	MVR400HOR/ED28PA
ANSI Code	M135/M155
Standard Package	Case
Standard Package GTIN	10043168728857
Standard Package Quantity	12
Sales Unit	Case
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	12
UPC	043168728850



**NOTES**

- When operated on a 120 hrs. cycle (minimum), lamp life rating may be extended by up to 50% based on engineering estimates.