

FEATURES & SPECIFICATIONS

INTENDED USE

Ideal for building and wall mounted applications.

CONSTRUCTION

Rugged, corrosion-resistant die-cast aluminum back housing and hinged door frame. Castings are sealed with a one-piece gasket to inhibit the entrance of external contaminants. Lens is thermal and shock-resistant clear tempered glass. Finish is bronze polyester powder paint.

ELECTRICAL

Ballast is high reactance, high power factor for 100M. Ballast is 100% factory tested.

OPTICS

Anodized aluminum reflector, provides IES full cutoff distribution. Medium-base lamp included in carton as standard.

INSTALLATION

Housing is configured for mounting directly over a standard 4" outlet box or for surface wiring via any of three convenient 1/2" threaded conduit entry hubs.

LISTINGS

UL Listed to US safety standards. UL listed for wet locations.

Note: Specifications subject to change without notice.

Catalog Number
Notes
Type

Full Cutoff Wall Packs

TWR1S

100W METAL HALIDE



Specifications

Height: 9-3/8 (23.8)


Width: 14-3/8 (36.5)

Depth: 8-3/8 (21.3)

*Weight: 14.5 (6.58 kgs)

All dimensions shown in inches (centimeters) unless otherwise noted.

*Weight as configured in example below.



ORDERING INFORMATION


Example: TWR1S 100M TB LPI

Catalog number	Wattage	Voltage	Photocell included	Lamp included	Available in Canada
Metal halide					
TWR1S 100M TB LPI	100	120/208/240/277	N	Y	N

TWR1S Metal Halide Cutoff Wall Pack

TWR1S 100M TB LPI TEST NO: LTL 14874P

ISOILLUMINANCE PLOT (Footcandle)

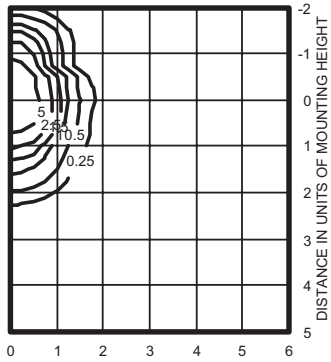

W lamp, horizontal lamp orientation
Footcandle values based on 12'
mounting height, 8500 rated lumens.
Luminaire Efficiency: 46.9%