


S025023S2000

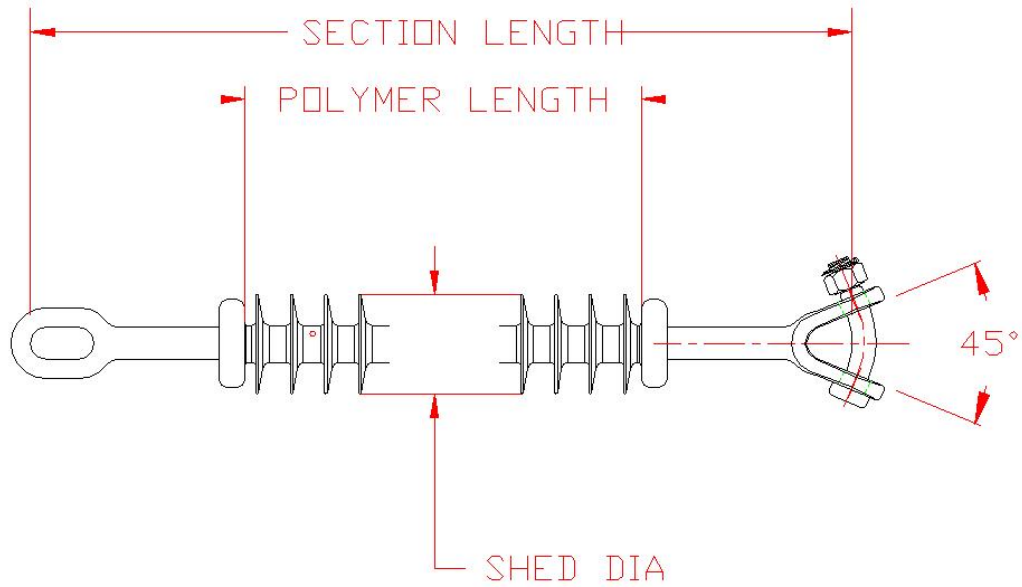


Product Specifications

Typical System Voltage	69kV / 115kV
Strength Class	25 kip, 5/8" (16 mm)
Top/Ground End Fitting	Y-Clevis
Bottom/Line End Fitting	Chain Eye
Section Length	37.08 IN (942 MM)
Leakage Distance	61 IN (1537 MM)
Corona Ring	None
Polymer Length	23.66 IN (601 MM)
System Voltage (kV)	69kV
Working Load	12,500 lbs
Dry Arc Distance	23.7 IN (601 MM)
Number of Sheds	22
Shed Style	Uniform
Shed Diameter	2.9 IN
Rod Diameter	5/8 IN (16 MM)
Thickness of housing over Rod	> 3MM
End Fitting Material	Ductile Iron
SML	25,000 lbs
RTL	12,500 lbs
ANSI 60Hz Dry FO	250 kV
Housing Material	SILICONE RUBBER
ANSI 60Hz Wet FO	235 kV
ANSI 60Hz Wet Withstand	150 kV
IEC lightning Impulse Withstand - Positive	415 kV
ANSI Critical Impulse FO - Positive	350 kV
IEC lightning Impulse Withstand - Negative	395 kV
ANSI Critical Impulse FO - Negative	330 kV

Compressed Product Number

S025023S2000

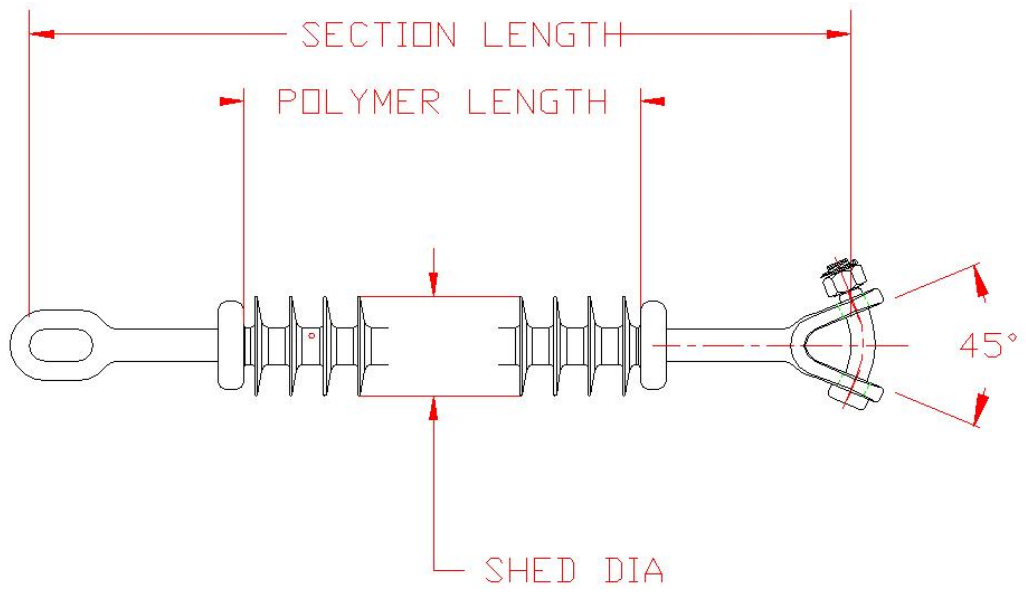

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.