


S025047S2010

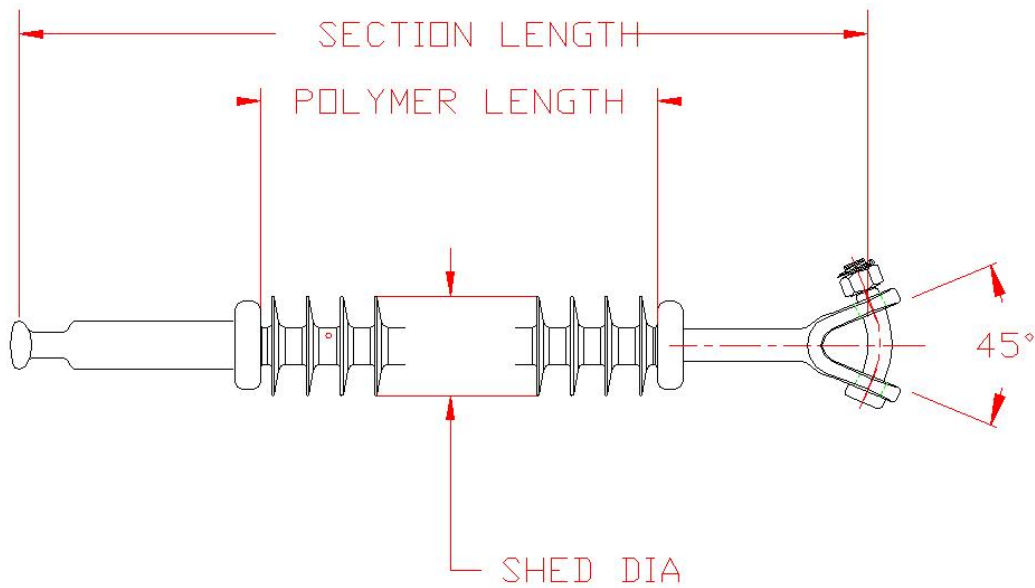


Product Specifications

| | |
|--|----------------------|
| Typical System Voltage | 138kV / 161kV |
| Strength Class | 25 kip, 5/8" (16 mm) |
| Top/Ground End Fitting | Y-Clevis |
| Bottom/Line End Fitting | ANSI Ball |
| Section Length | 59.22 IN (1504 MM) |
| Leakage Distance | 121 IN (3073 MM) |
| Corona Ring | None |
| Polymer Length | 47.42 IN (1204 MM) |
| System Voltage (kV) | 161kV |
| Working Load | 12,500 lbs |
| Dry Arc Distance | 47.4 IN (1205 MM) |
| Number of Sheds | 44 |
| Shed Style | Uniform |
| Shed Diameter | 2.9 IN |
| Rod Diameter | 5/8 IN (16 MM) |
| Thickness of housing over Rod | > 3MM |
| End Fitting Class | ANSI |
| End Fitting Material | Ductile Iron |
| SML | 25,000 lbs |
| RTL | 12,500 lbs |
| ANSI 60Hz Dry FO | 500 kV |
| Housing Material | SILICONE RUBBER |
| ANSI 60Hz Wet FO | 475 kV |
| ANSI 60Hz Wet Withstand | 295 kV |
| IEC lightning Impulse Withstand - Positive | 800 kV |
| ANSI Critical Impulse FO - Positive | 690 kV |
| IEC lightning Impulse Withstand - Negative | 795 kV |
| ANSI Critical Impulse FO - Negative | 685 kV |

Compressed Product Number

S025047S2010

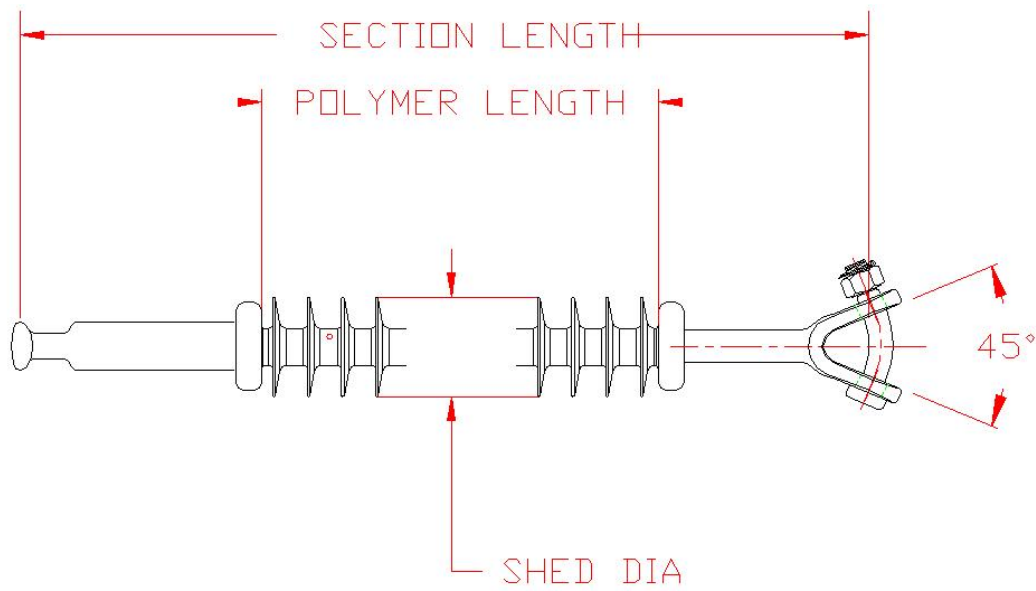

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.