Product End-of-Life Instructions







Product End-of-Life Instructions - EoLI

Product overview

Product Range: TeSys LC1F185-225

Marketing Model/Name:

- Three-pole and four-pole contactors powered by voltages of 24 to 1000 V AC.
- The generic references in the F range, TeSys LC1-F185 to LC1-F225.

Size: H x L x D in mm = 174 x 168.5 x 181

Weight in g:

Between 5010 and 5910

Purpose

The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.

Note:

This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE).


Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy:

Reuse → Separation for special treament → Other dismantling → Shredding

CAUTION: The product contains 1 printed circuit board and plastic parts with brominated FR which are recommended to be treated separately during the End of Life operations.

The components of the products that optimize the recycling performances are listed, identified and located hereunder.

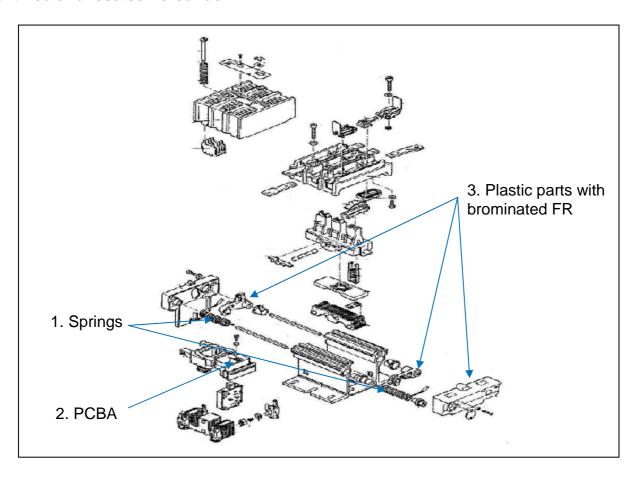

Recommendation	Number on drawing	Components	Weight (in g)	Comment
Operating hazards	1	Springs	31	
Special treatment	2	PCBA	0.9	
	3	Plastic parts with brominated FR	105.5	

EoLl achieved with Schneider-Electric TT03 V5 procedure

Schneider Electric Industries SAS

35, rue Joseph Monier CS 30323 F- 92506 Rueil Malmaison Cedex RCS Nanterre 954 503 439 Capital social 896 313 776 €

www.schneider-electric.com