

Specification Sheet


Part Number: T150XL3X2

Engineered and manufactured for maximum performance and quality

Made from 100% high-quality plastic to ensure efficient recycling

Inside serration for a strong grip onto bundles

Easy application either manually or with a processing tool

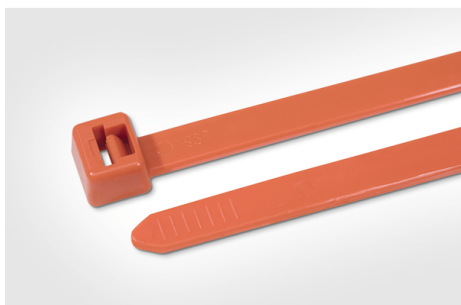

Heavy Duty Cable Tie, 43" Long, UL Rated, 175lb Tensile Strength, PA66, Orange, 25/pkg

Article Number 111-15504

Type T150XL

Color Orange (OG)

Quantity Per bag

Product Description Heavy duty T-Series cable ties feature inside serrations to provide a positive hold on wire and cable bundles. Durable head design guarantees high tensile strength and a low insertion force. For high-volume applications, tensioning tools are available to ensure consistent and safe installation.

Short Description Heavy Duty Cable Tie, 43" Long, UL Rated, 175lb Tensile Strength, PA66, Orange, 25/pkg

Global Part Name T150XL-PA66-OG

Minimum Tensile Strength (Imperial) 175

Minimum Tensile Strength (Metric) 780

Length L (Imperial) 43.0

Length L (Metric) 1095.0

Identification Plate Position none

Releasable Closure No

Tie Closure plastic pawl

Variant Inside Serrated

Width W (Imperial) 0.35

Width W (Metric) 8.9

Bundle Diameter Min (Imperial) 5.98

Bundle Diameter Min (Metric) 152.0

Bundle Diameter Max (Imperial) 12.99

Bundle Diameter Max (Metric) 330.0

Thickness T (Metric) 2.1

Material	Polyamide 6.6 (PA66)
Material Shortcut	PA66
Flammability	UL 94 V-2
Halogen Free	Yes
UV Resistant (Yes/No)	No
Use Conditions	For Indoor Use Only
Operating Temperature	-40°F to +185°F (-40°C to +85°C)
Reach Compliant (Article 33)	No
ROHS Compliant	Yes
Certification/Specification	UL-ZODZ2.E64139
UL Recognized (US)	Yes
UL Recognized (US and Canada)	Yes
Package Quantity (Imperial)	25
Package Quantity (Metric)	25
Customs Number	3926909988

7930 N. Faulkner Road, Milwaukee, WI 53224

Phone: (800) 537-1512 | Email: corp@htamericas.com

© 2025 HellermannTyton. All Rights Reserved.

[Contact Us](#) [RoHS/WEEE Compliance](#) [Disclaimer](#) [Terms and Conditions](#)