



[Catalog Home](#)

Product Datasheet


ANDERSON FARGO

JTS20 -- Compression Terminal



Compression Terminal, Uni-Grip, Jumper Terminal, Straight, Conductor Range, Range 1.806-1.900

Product Specifications


<p>Series</p>	 <p>JTS Series</p> <p>Compression Terminal Straight, Partial Tension AAC, AAAC, ACAR & ACSR Conductor</p>
<p>PDF Catalog Page</p>	<p>Click HERE to view the web page.</p>
<p>Conductor Range (in)</p>	<p>1.806-1.900</p>
<p>Length before Compression</p>	<p>18.4 in (467 mm)</p>
<p>Pad Width</p>	<p>4.0 in (101 mm)</p>
<p>Pad Holes</p>	<p>4</p>
<p>Compression Method</p>	<p>Uni-Grip (single die)</p>
<p>Material & Connection Method</p>	<p>Aluminum Compression</p>
<p>Die Size</p>	<p>20CD</p>
<p>Minimum Press (Tons)</p>	<p>100</p>
<p>Voltage Application</p>	<p>EHV & Std</p>
<p>Inhibitor Loaded</p>	<p>Yes</p>
<p>Conductor Minimum - Maximum Range</p>	<p>AAC 2500 kcmil (91) thru AAC 2500 kcmil (127) ACSR 2515.0 kcmil (76/19)</p>
<p>Material Type</p>	<p>Non-Standard</p>

UPC Code	09635938417
Standard Package	1
Standard Package Unit	Each
MOQ	1
Weight / Ea.	8.026 lbs

Notes
 To specify stainless steel hardware add "SS" suffix to catalog number.

Features
 Jumper terminals are prefilled with inhibitor. Taper and pad are coated with protective strippable plastic and bore is capped. Tongue holes have NEMA spacing. Standard hardware includes one Aluminum 1/2-13 bolt, nut and two aluminum washers per .56 diameter hole.

Compressed Product Number
 JTS20

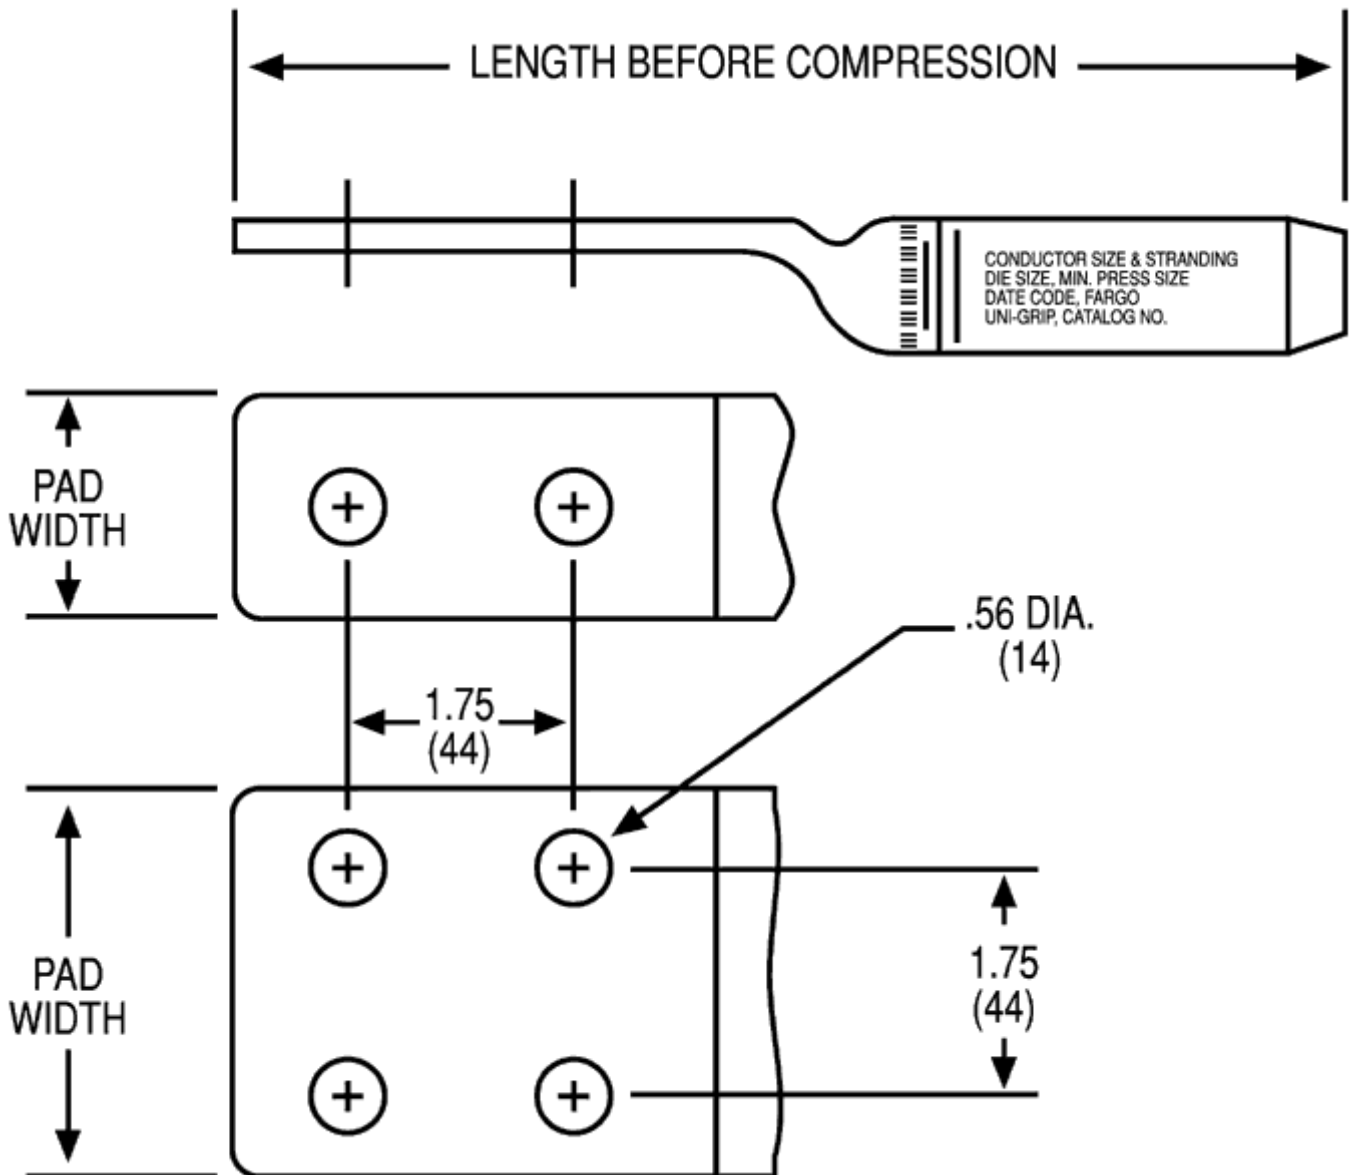



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.