




Product Datasheet

ANDERSON FARGO


C101414 -- Compression Deadend

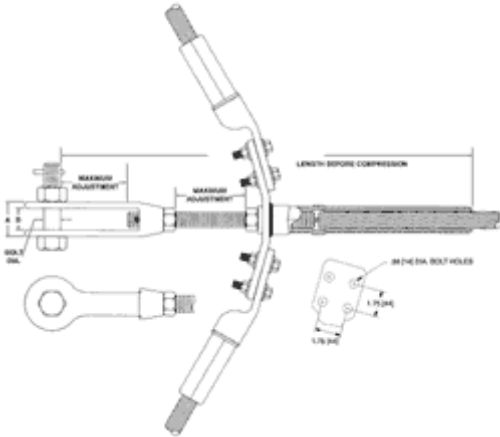

Compression Deadend, Uni-Grip, Double Tongue, Adjustable Clevis, for AAC, Dia. Range 1.236 - 1.33, With Terminals

Product Specifications

Category Image



Compression Deadends


Clevis Type

Aluminum UniGrip®

(One Die)

AAC, AAAC, ACAR & ACSR Conductor

Series Image (Comp Clevis)



C10 Series

Compression Dead End

Adjustable Clevis Type, Double Tongue

Uni-Grip® (One Die)

Full Tension

AAC Conductor

PDF Catalog Page

[Click HERE to view the web page.](#)

Terminal Option

With

Style

Uni-Grip, Double Tongue, Adjustable Clevis

Type

Compression

Material

Aluminum/Steel

Compression Method

Uni-Grip (single die system)

Die Size

14CD

Minimum Press (Tons)

60

Voltage Application

EHV & Std


Inhibitor Loaded

Yes

Body Material	Seamless Extruded Aluminum Alloy
Clevis Material	Galvanized Forged Steel
Cotter Pin Material	304 Stainless Steel
Terminal Material	Seamless Extruded Aluminum Alloy
Hardware Material	Aluminum Alloy
Bolt Diameter	1.0 in (27 mm)
Length before Compression	23.8 in (605 mm)
Dimension A	2.4 in (61 mm)
Dimension B	1.4 in (35 mm)
Maximum Adjustment	3.5 in (88 mm)
Pad Width	3.0 in (76 mm)
Bolt Holes	4
Conductor Range Minimum - Maximum	AAC 1192.5 kcmil (61) Thru AAC 1300 kcmil (91)
Minimum Conductor Diameter	1.236
Maximum Conductor Diameter	1.33
Standard Package	1

Compressed Product Number

C101414

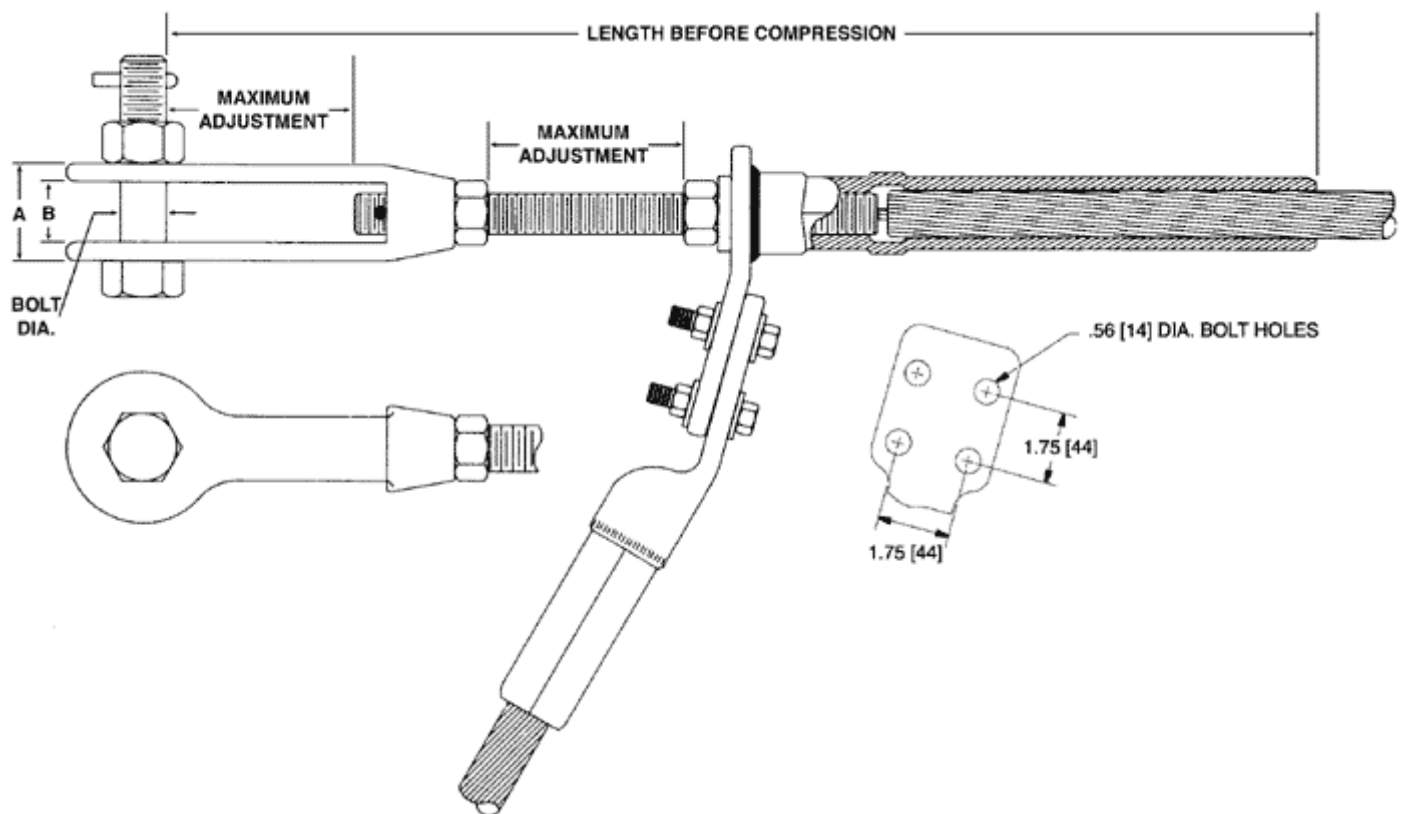

Dimensions

[Catalog Home](#)



NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.