



Product Datasheet


ANDERSON FARGO

HAS139C -- Suspension Clamp



Suspension Clamp, Aluminum, for use with conductors 0.9 - 1.39 with fitting: Clevis


Product Specifications

Series	 <p>HAS series Standard Voltage Aluminum</p>
PDF Catalog Page	Click HERE to view the web page.
Fitting	Clevis
Clamp Material	Aluminum
Fitting Catalog No.	CA-13
Ultimate Body Strength	25,000 lbs (11,340 kgs)
Maximum Take-off Angle 0	22.5
Dimension H	3.00 in (76.2 mm)
Dimension J	0.500 in (12.7 mm)
Dimension L	8.88 in (225 mm)
Dimension W	1.53 in (38.9 mm)
Hardware Material	Galvanized Steel
Minimum - Maximum Conductor Size	AAC 636 kcmil (37) Thru AAC 556.5 kcmil (37) w/Armor Rods AAAC 652.8 kcmil str (19) Thru AAAC 559.6 kcmil str (19) w/Armor Rods ACSR 556.5 kcmil (24/7) Thru ACSR 477.0 kcmil (30/7) w/Armor Rods ACAR 649.5 kcmil (18/19) Thru ACAR 587.2 kcmil (15/4)
Clamping Range	0.90 - 1.39 in (22.86 - 35.31 mm)
Voltage Application	Standard
Material Type	Non-Standard

UPC Code	09635931484
Standard Package	10
Standard Package Unit	Each
Min Order Qty	1
Weight / Ea.	4.9 Lbs

Compressed Product Number

HAS139C

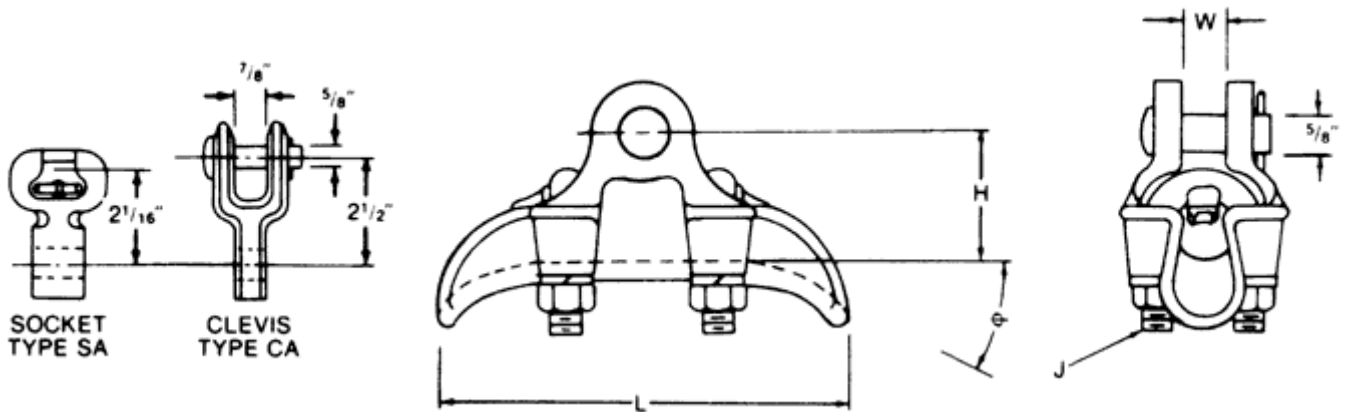

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.