




Product Datasheet

ANDERSON FARGO

JTF20 -- Compression Terminal

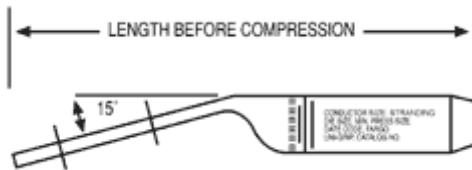

Compression Terminal, Uni-Grip, Jumper Terminal, 15 degree, Conductor Range, Range 1.806-1.900

Product Specifications

Series	 JTF Series Compression Terminal 15 degree, Partial Tension AAC, AAAC, ACAR & ACSR Conductor
PDF Catalog Page	Click HERE to view the web page.
Conductor Range (in)	1.806-1.900
Length before Compression	17.3 in (439 mm)
Pad Width	4.0 in (101 mm)
Pad Holes	4
Compression Method	Uni-Grip (single die)
Material & Connection Method	Aluminum Compression
Die Size	20CD
Minimum Press (Tons)	100
Voltage Application	EHV & Std
Inhibitor Loaded	Yes
Conductor Minimum - Maximum Range	AAC 2500 kcmil (91) thru AAC 2500 kcmil (127) ACSR 2515.0 kcmil (76/19)
Material Type	Non-Standard
Standard Package	1
Standard Package Unit	Each
MOQ	1
Weight / Ea.	7.477 lbs

Notes


To specify stainless steel hardware add "SS" suffix to catalog number.

Features

Jumper terminals are prefilled with inhibitor. Taper and pad are coated with protective strippable plastic and bore is capped. Tongue holes have NEMA spacing. Standard hardware includes one Aluminum 1/2-13 bolt, nut and two aluminum washers per .56 diameter hole.

Compressed Product Number

JTF20

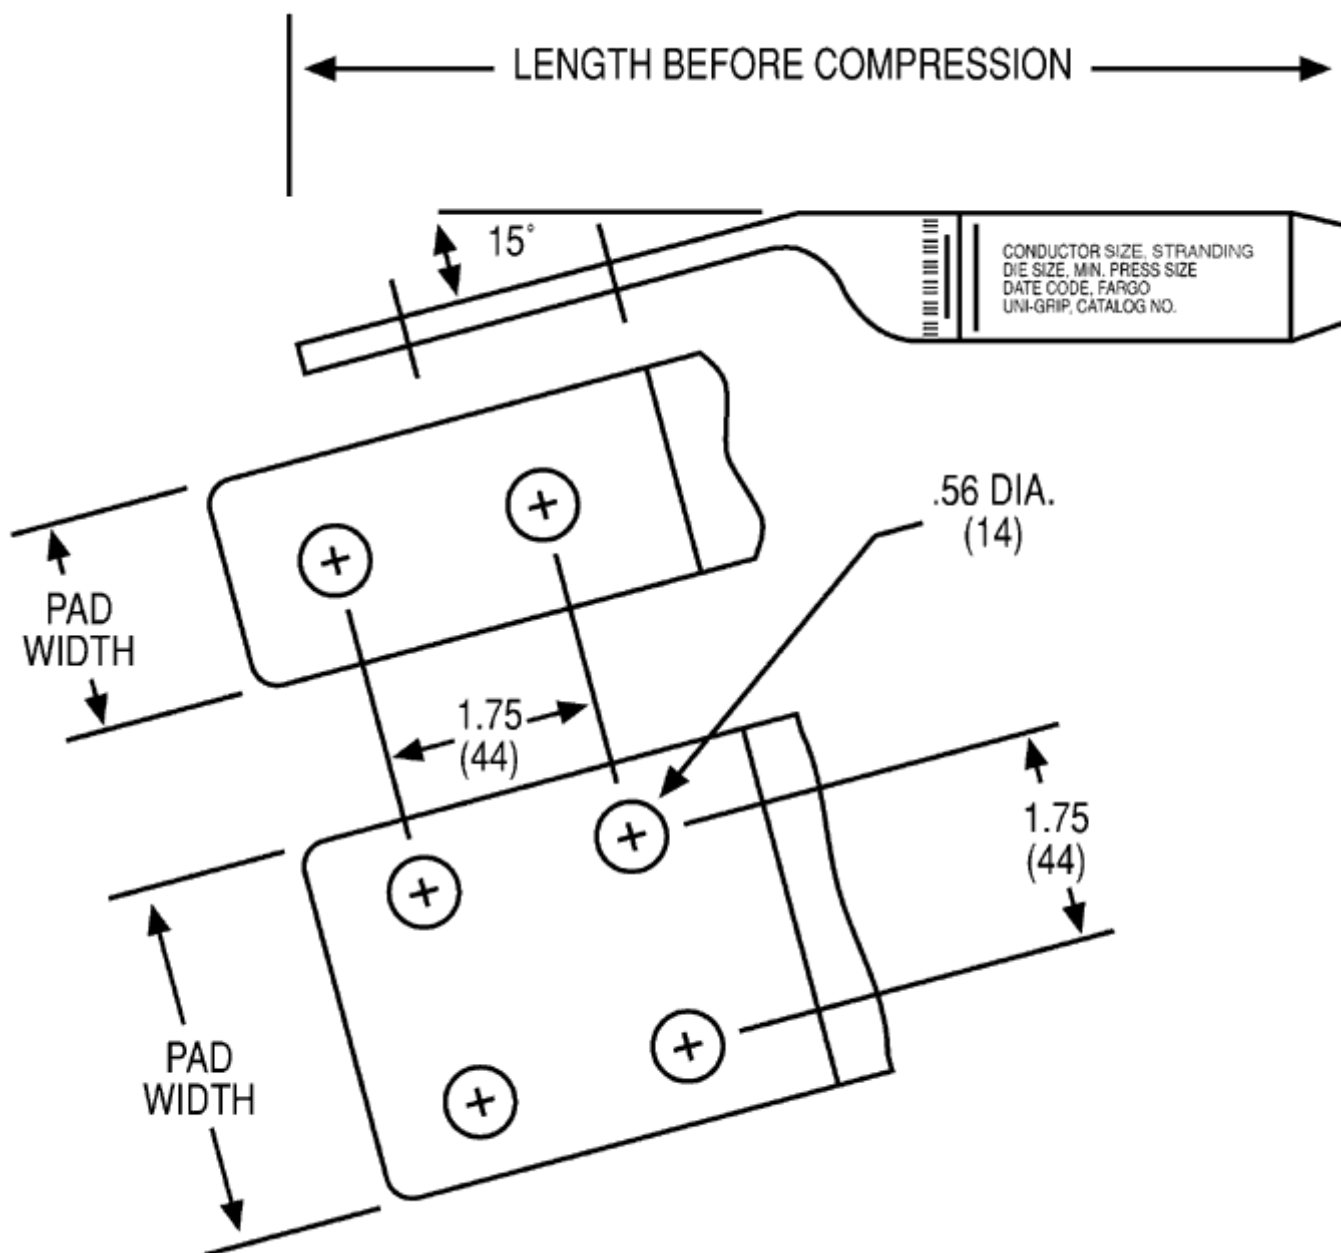

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.