


15° 7-Hole Cloverleaf Single-Phase Cutout / Arrester Bracket (15°)

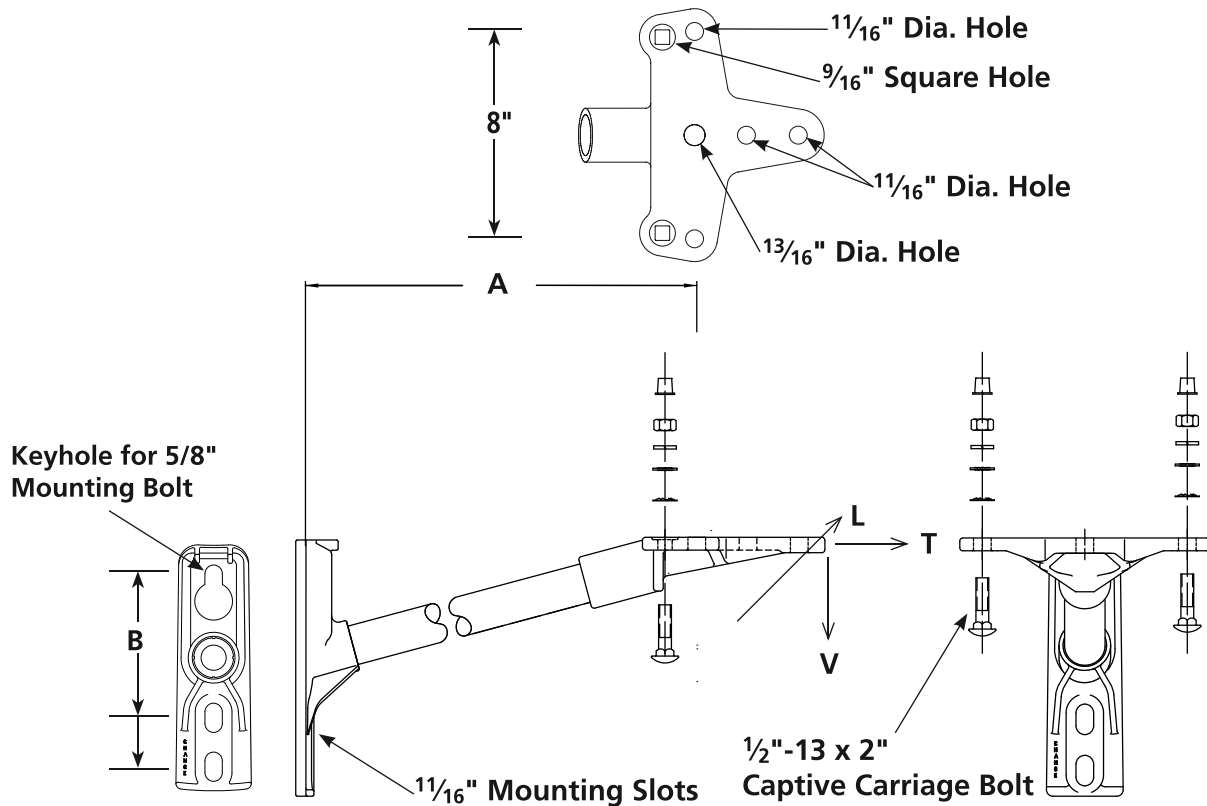

- Base design permits bolting or banding to structure.
- Base is hot-dip galvanized ductile iron.
- B Dimension is 6" & 8"
- End fitting is aluminum alloy.
- Replacement Hardware Kit PST6531849

Catalog Number	Length A	Minimum Ultimate*			Weight (Each)
		Vertical V	Longitudinal L	Transverse T	
Medium Duty 1 1/2" (38 mm) Dia. Fiberglass Rod					
Standoff Bracket only					
1SBM12DFCL	12" (30.5 cm)	1800 lbs. (816 kg)	1400 lbs. (635 kg)	10,000 lbs. (4536 kg)	6.9 lbs. (3.1 kg)
1SBM15DFCL	15" (38.1 cm)	1500 lbs. (680 kg)	1100 lbs. (499 kg)	10,000 lbs. (4536 kg)	7.3 lbs. (3.3 kg)
1SBM18DFCL	18" (45.7 cm)	1200 lbs. (544 kg)	950 lbs. (431 kg)	10,000 lbs. (4536 kg)	7.7 lbs. (3.5 kg)
1SBM21DFCL	21" (53.3 cm)	1050 lbs. (476 kg)	825 lbs. (374 kg)	10,000 lbs. (4536 kg)	8.1 lbs. (3.7 kg)
1SBM24DFCL	24" (61.0 cm)	900 lbs. (408 kg)	700 lbs. (318 kg)	10,000 lbs. (4536 kg)	8.5 lbs. (3.9 kg)
Bracket with Hardware					
1SBM12DFCLH	12" (30.5 cm)	1800 lbs. (816 kg)	1400 lbs. (635 kg)	10,000 lbs. (4536 kg)	7.0 lbs. (3.2 kg)
1SBM15DFCLH	15" (38.1 cm)	1500 lbs. (680 kg)	1100 lbs. (499kg)	10,000 lbs. (4536 kg)	7.4 lbs. (3.4 kg)
1SBM18DFCLH	18" (45.7 cm)	1200 lbs. (544 kg)	950 lbs. (431 kg)	10,000 lbs. (4536 kg)	7.8 lbs. (3.5 kg)
1SBM21DFCLH	21" (53.3 cm)	1050 lbs. (476 kg)	825 lbs. (374 kg)	10,000 lbs. (4536 kg)	8.2 lbs. (3.7 kg)
1SBM24DFCLH	24" (61.0 cm)	900 lbs. (408 kg)	700 lbs. (318 kg)	10,000 lbs. (4536 kg)	8.6 lbs. (3.9 kg)

*Recommended maximum working load is 50% of minimum ultimate ratings listed.

Consult factory for additional lengths.

Add "SC" suffix to the end of the catalog number to denote Silicone Coated rod