



**POWER
SYSTEMS, INC.**

**Interactive
eCatalog**

In the world of power transmission and distribution, look to Hubbell.

[Catalog Home](#)

Product Datasheet

ANDERSON FARGO

BSG050N -- Deadend



Deadend

Product Specifications

Category Image



Bolted Deadends

Aluminum & Bronze

Straight Line

Aluminum & Copper
Conductor



BSG Series

Straight Line Dead End,
Compact

Bolted, Bronze

Copper & Copperweld®
Conductor

Series Image (Bolted)

PDF Catalog Page

[Click HERE to view the web page.](#)

Fitting Type

None

Style

BSG - Deadend, Straight line, Compact

Type

Bolted

Material

Bronze

Fitting Catalog No.

NONE

Ultimate Body Strength

5,500 lb (2,495 kg)

U-Bolts

4

Bolt Size

.50 in (12.70 mm)

Dimension L

6.50 in (165.1 mm)

Dimension R

4 in (101.60 mm)

Dimension W

.69 in (17.46 mm)

Conductor Range Minimum - Maximum

Cu 2/0 sol Thru Cu 550 kcmil (61)

Minimum Conductor Diameter

0.36

Maximum Conductor Diameter

0.875

Weight / Ea.

3.43 lbs

Standard Package



9

UPC Code

09635929288

Compressed Product Number

BSG050N

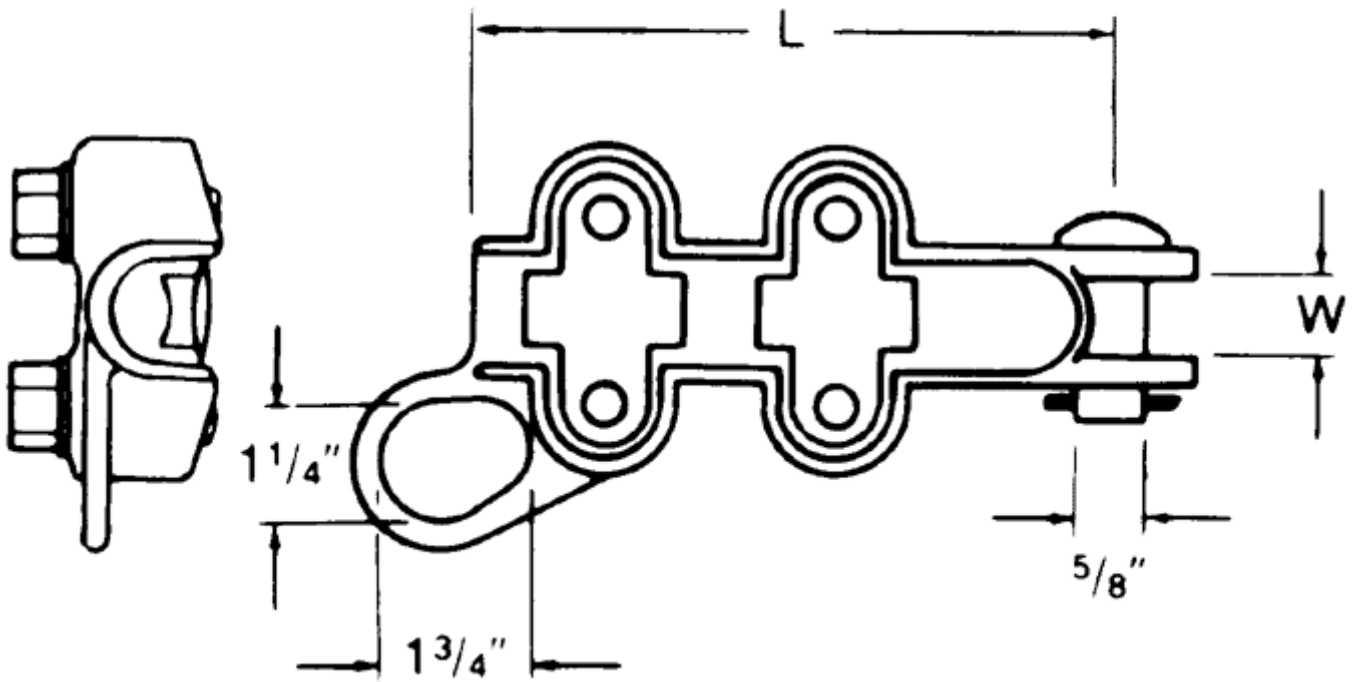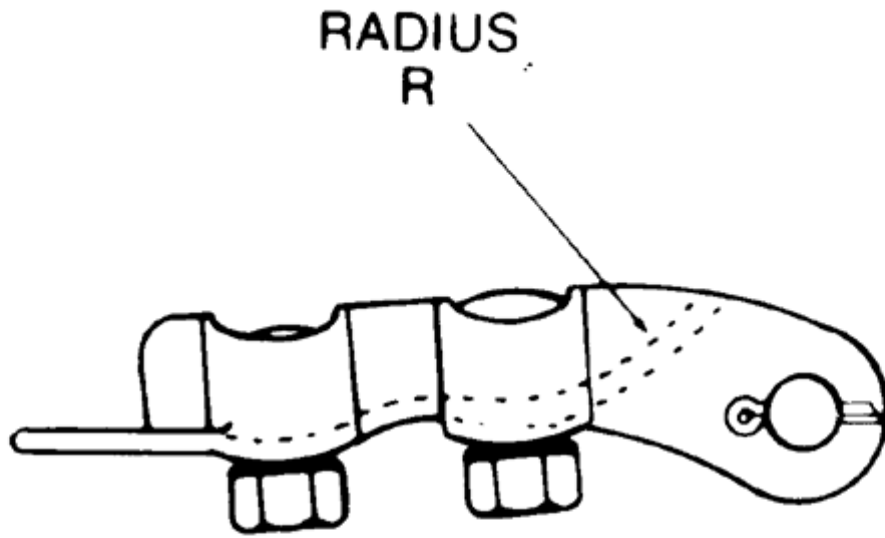

Dimensions

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.