




**Product Datasheet**

**ANDERSON FARGO**


**VC85A -- Full Tension Compression Splice**

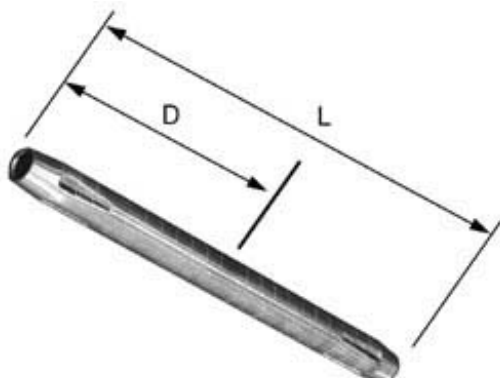

Full Tension VersaCrimp Aluminum Compression Splice


**Product Specifications**

**Splice Type**

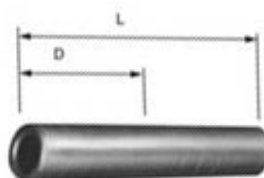

**VERSA-CRIMP®**  
**Compression Splices**  
(For use with  
VersaCrimp and other  
Dieless Type Tools)

**Versacrimp Compression Series**

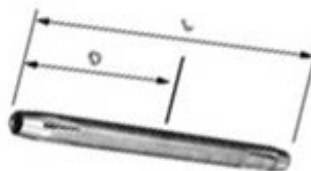

**VC-AR & VC-R Series**  
**Compression Splice**  
**VERSA-CRIMP®**  
Full Tension  
AAC, AAAC &  
(ACSR SingleCore) Conductor

**PDF Catalog Page**

[Click HERE to view the web page.](#)

**VersaCrimp Conductor Size Minimum**

0.666 in

**VersaCrimp Conductor Size Maximum**

0.795 in

**Material**

Aluminum

**VersaCrimp Conductor Range**

336.4 (19), 397.5 (19), 477 (37,19) AAC

**VersaCrimp Conductor Minimum**

.666 in

**VersaCrimp Conductor Maximum**

.795 in

**Dimension D**

5.81 in (148 mm)

**Dimension L**

11.75 in (298 mm)

**Length before Compression**

11.75 in (298 mm)

**Compression Method**

VC6-3, VC6FT or VC8, VersaCrimp Tooling ONLY

<b>UL Listed</b>	No
<b>Inhibitor Loaded</b>	Yes
<b>Material Type</b>	Non-Standard
<b>UPC Code</b>	09635933611
<b>Standard Package</b>	20
<b>Standard Package Unit</b>	Each
<b>Min Order Qty</b>	20
<b>Weight / Ea.</b>	0.784 lbs

#### Notes

For full tension ACC applications. Installs using VersaCrimp VC6FT or VC8 tool.

#### Compressed Product Number

VC85A

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

*All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.*

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.