



**HUBBELL**  
Outdoor Lighting

# Architectural LED Floodlight

## NEW 12 LED Architectural Floodlight & Wall Mount 6 LED

Hubbell Outdoor Lighting's ALF family has expanded and now features a 12 LED flood and wall mount 6 LED. Both 6 and 12 LED fixtures are excellent for small floodlighting applications such as signs, façade, landscape accent or small area illumination. The wall mount ALFW-6LU is a versatile solution for doorways entrances featuring an adjustable pivot from 0-75°. The ALF family's compact size allows the flood or wall mount to be easily hidden or blend into the landscape environment.



ALF 12 LED KNUCKLE MOUNT



ALFW 6 LED WALL MOUNT



ALF 6 LED KNUCKLE MOUNT

## Key Features & Benefits

- ALF-6LU – 10.1w delivering 905 lumens
- ALF-12LU – 21.4w delivering 1913 lumens
- Wall mount ALFW cast aluminum cover/quick mount plate/universal adapter for easy installation
- 5000K high CRI LEDs
- Long life – 50,000 hours L70
- Wide uniform beam – 3 times set back
- Rugged, weatherproof, compact, low profile
  - Extruded aluminum housing
  - Tempered glass lens
  - Silicone gasket seal
  - Brass threads at knuckle
- Dark bronze powder coat finish
- UL1598 listed for use in wet locations

### ALF DESIGN FEATURES



Tempered, silk screened glass lens, 6 & 12 LED



Decorative, ribbed back for sleek heat dissipation



Wide beam lensed LEDs



Weathertight end caps and gasket



Rugged knuckle with locking teeth and brass threads



Wall mount fits 3 1/2" or 4" standard junction boxes

ORDERING INFORMATION ON REVERSE SIDE

# ALF Architectural LED Floodlight Application

Before



After ALF-6LU-5K-BZ-PC




## ORDERING INFORMATION





| Catalog Number            | Wattage | Number of LEDs | Voltage <sup>1</sup> | Lumens | Life       | CCT   | Weight lbs. (kg) |
|---------------------------|---------|----------------|----------------------|--------|------------|-------|------------------|
| <b>1/2" KNUCKLE MOUNT</b> |         |                |                      |        |            |       |                  |
| <b>ALF-6LU-5K-BZ</b>      | 10.1    | 6              | 120-277V             | 905    | 50,000 hrs | 5000K | 4.0 (1.8)        |
| <b>ALF-12LU-5K-BZ</b>     | 21.4    | 12             | 120-277V             | 1913   | 50,000 hrs | 5000K | 8.0 (3.6)        |
| <b>WALLMOUNT</b>          |         |                |                      |        |            |       |                  |
| <b>ALFW-6LU-5K-BZ-PC</b>  | 10.7    | 6              | 120V                 | 510    | 50,000 hrs | 5100K | 4.5 (2.0)        |

<sup>1</sup> Unit should not be used above 240V in Canada



| A            | B      | C      | D      |
|--------------|--------|--------|--------|
| 12/24"       | 3 1/2" | 1 1/2" | 3 1/2" |
| 305/609.6 mm | 89 mm  | 38 mm  | 89 mm  |

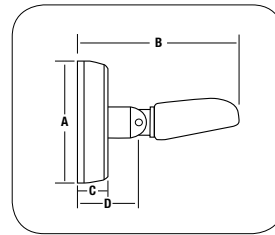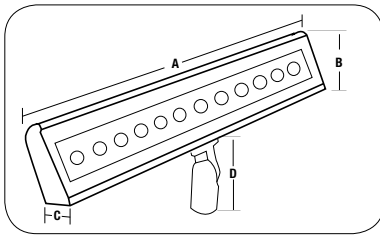

| A      | B      | C      | D      |
|--------|--------|--------|--------|
| 5 1/2" | 6 1/2" | 1 1/8" | 2 1/8" |
| 139 mm | 165 mm | 28 mm  | 54 mm  |

## PERFORMANCE

