






5100 Series Horizontal or Vertical Mounted Fan Forced Unit Heater

Diffuser Options

DESCRIPTION	UPC# 686334	MODEL NUMBER	KW USED	MAX MOUNTING HEIGHT (ft.)	DIMENSION A (feet)		DIMENSION B (feet)		WT. (lbs.)	LIST
1 Louver Diffuser (Standard). Louvers can be individually adjusted for rectangular coverage over doorways as an air curtain, or to meet rectangular floor pattern heating requirements.	NA	Standard	3.3-5 7.5-10 25-30 40-50	9 12 18 22 24	20 40 52 75 84		10 22 30 42 47		NA	NA
2 General Distribution (No Diffuser). The 5100 air chute venturi permits general down flow air pattern distribution as required at a higher mounting height.	NA	Not Required	3.3-5 7.5-10 25-30 40-50	9 12 18 22 24	15 30 40 55 64		NA		NA	NA
3 Anemostat Diffuser (Optional). For applications where draft restriction is required at lower unit mounting heights.	692687	AD5120	7.5-10	15	38		NA		10	372
	681186	AD5150	25-30	17	50		NA		12	555
	681186	AD5150	40-50	20	60		NA		37	598
	722070	AD5175	60-70	31	-		NA			
4 Radial Diffuser (Optional). Individually adjustable fins permit increased floor coverage at 45° open. Additional throw is accomplished when fins are 90° vertical. (Please allow for higher mounting heights.)	692663	RD5120	7.5-20	45°	90°	45°	90°	NA	12	412
	692663	RD5120		10	14	36	30			
	692670	RD5150	25-50	14	21	42	35		14	481
	692670	RD5150		20	30	62	44			
	692670	RD5150		18	28	68	54			
	722087	RD5175	60-70	26	36	72	60		39	519

 Description 1 Louver Diffuser	 Description 2 No Diffuser	 Description 3 Anemostat Diffuser	 Description 4 Radial Diffuser
--	--	--	--

Mounting Brackets & Model Designator

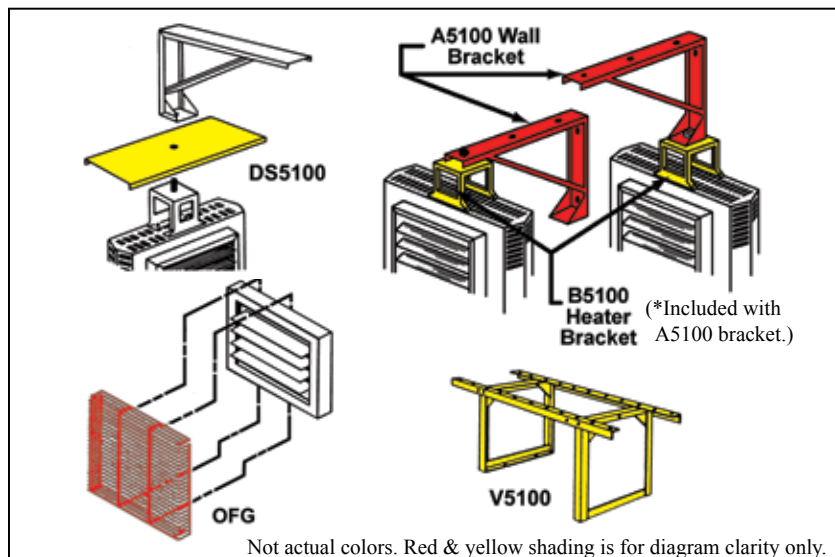

MOUNTING BRACKETS				
UPC#	MODEL	MODEL SIZE	WT.	LIST
686334				
692694	A5105	3.3 KW TO 5.0 KW	9 lbs.	96
692700	A5120	7.5 KW TO 20.0 KW	13 lbs.	117
692717	A5150	25.0 KW TO 50.0 KW	16 lbs.	131
688628	B5105*	3.3 KW TO 20.0 KW	3 lbs.	52
688635	B5150*	25.0 KW TO 50.0 KW	8 lbs.	77
692847	V5105	3.3 KW TO 5.0 KW	9 lbs.	183
692854	V5120	7.5 KW TO 20.0 KW	13 lbs.	224
692861	V5150	25.0 KW TO 50.0 KW	16 lbs.	236
DUST SHIELD				
692878	DS5105	3.3 KW TO 5.0 KW	3 lbs.	33
692885	DS5120	7.5 KW TO 20.0 KW	4 lbs.	38
681223	DS5150	25.0 KW TO 50.0 KW	5 lbs.	40
FAN GUARD				
706544	OFG5101	3.3 KW TO 5.0 KW	3 lbs.	53
706551	OFG5102	7.5 KW TO 20.0 KW	4 lbs.	58
706568	OFG5103	25.0 KW TO 50.0 KW	5 lbs.	66

HOW TO DESIGNATE A MODEL:

HF 2 B 51 10 C A 1							
Element Volts F = 208 H = 240 HF = 240/208 G = 277 P = 480	Phase 1 = 1-Phase 2 = 1 or 3-Ph. 3 = 3-Phase	Motor Voltage F = 208 H = 240 B = 240 / 208 G = 277 P = 480	Model Series 51	Element KW	Control System Blank = None C = Contactor	Transformer Blank = None A = Included	Control Volts 1 = 24 2 = 120 (with CA option)