



**POWER
SYSTEMS, INC.**

In the world of power transmission and distribution, look to Hubbell.


**Interactive
eCatalog**

[Catalog Home](#)

Product Datasheet

ANDERSON FARGO

VAUL30012 -- Terminal, Compression

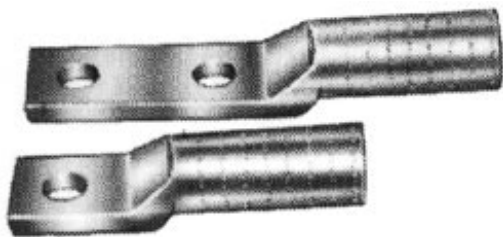

Aluminum Compression Terminal (Replaces ESP-AD, AMS, and ALM Series)

Product Specifications


Series Image (Lugs)



VAUL Series

Aluminum Compression Lug
Heavy Duty 1 or 2 hole
VERSAtile (die and VC tools)

Material	Aluminum
PDF Catalog Page	Click HERE to view the web page.
Plating	No
Inhibitor	Yes
Number of Pad Holes	1
Pad Bolt Diameter	0.50 in (12.7 mm)
VersaCrimp Conductor Size Minimum	.376 in
VersaCrimp Conductor Size Maximum	.630 in
Die Type Tooling Crimp Conductor Size Minimum	.609 in
Die Type Tooling Conductor Size Maximum	.630 in
Lug Conductor Type	AAAC, AAC, ACAR, ACSR, Compact, CU
Style	Impact Extruded
Spade Holes	1
Bolt Diameter	0.50 in (12.70 mm)
Crimp Method	VERSAtile (accommodates conventional and Anderson tools)
UL Listed	No
Body Material	Aluminum
Dimension D	2.44 in (62.0 mm)
Dimension L	4.59 in (116.6 mm)
Dimension T	0.37 in (9.4 mm)
Dimension W	1.25 in (31.7 mm)
UPC Code	09635933475
Standard Package	1
Standard Package Unit	Each
Min Order Qty	10

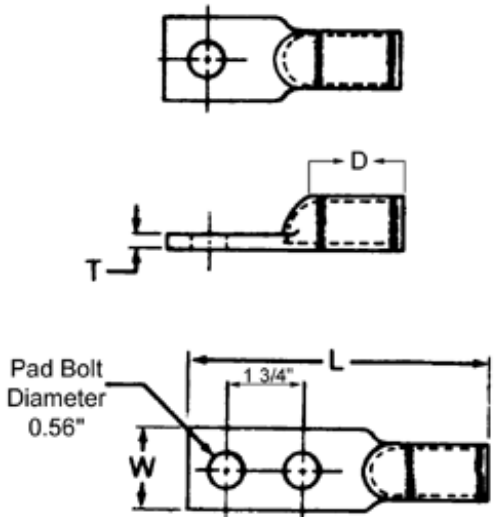Weight / Ea.	0.196 lbs
Material Type	Non-Standard
Notes	
Meets ANSI C119.4 Class A performance on aluminum and ACSR conductor (minimum tension). Meets ANSI C119.4 Class C performance on copper conductor (minimum tension).	
Features	
Connectors are prefilled with rubber compatible inhibitor and sealed with color coded end caps. Metal marked to indicate recommended conductors and crimp dies. When used with die type compression tools, use with maximum size conductor only.	
Compressed Product Number	
VAUL30012	
	

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.