



SNAPConnect® USB Charger Duplex Receptacles




Description	Color	15A 125V AC	20A 125V AC
Hospital Grade SNAPConnect® USB Charger Tamper-Resistant Receptacle, two USB type 2.0 ports, 3.0 Amp, 5 Volt DC, 15 or 20 Amp, 125 Volt AC, Style Line® decorator duplex.	Black	SNAP8200USBBK	SNAP8300USBBK
	Brown	SNAP8200USB	SNAP8300USB
	Gray	SNAP8200USBGY	SNAP8300USBGY
	Ivory	SNAP8200USBI	SNAP8300USBI
	Light Almond	SNAP8200USBLA	SNAP8300USBLA
	Red	SNAP8200USBR	SNAP8300USBR
SNAPConnect® USB Charger Tamper-Resistant Receptacle, two USB type 2.0 ports, 3.0 Amp, 5 Volt DC, 15 or 20 Amp, 125 Volt AC, Style Line® decorator duplex.	Black	SNAP15USBBK	SNAP20USBBK
	Brown	SNAP15USB	SNAP20USB
	Gray	SNAP15USBGY	SNAP20USBGY
	Ivory	SNAP15USBI	SNAP20USBI
	Light Almond	SNAP15USBLA	SNAP20USBLA
	White	SNAP15USBW	SNAP20USBW
Clear right angle terminal with 6 inch leads #12 AWG THHN/THWN-2; Polycarbonate housing material.	Solid	SNAP1RA	SNAP1RA
	Stranded	SNAP2RA	SNAP2RA

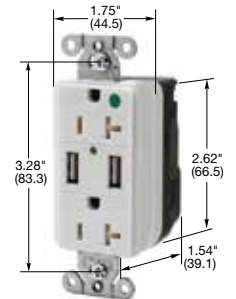

SNAP8300USBW

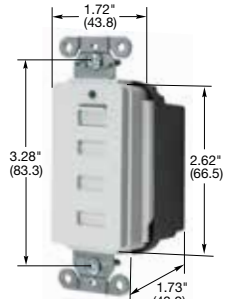

USB4W

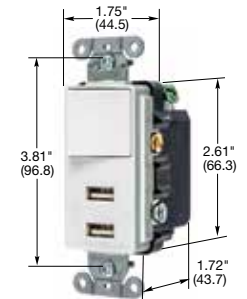

USB102W

4 Port USB Charger Outlets




Description	Color	4 Type A ports	2 Type A and 2 Type-C ports	4 Type-C ports
USB Charger Outlets, 4 USB ports, 5 Amp, 5 Volt DC, Style Line® decorator.	Black	USB4BK	USB4ACBK	USB4CBK
	Brown	USB4	USB4AC	USB4C
	Gray	USB4GY	USB4ACGY	USB4CGY
	Ivory	USB4I	USB4ACI	USB4CI
	Light Almond	USB4LA	USB4ACLA	USB4CLA
	White	USB4W	USB4ACW	USB4CW

Switch Combo Outlets

Description	Color	Catalog Number
Switch Combo Outlet, two USB type 2.0 ports, 2.1 Amp, 5 Volt DC, Style Line® decorator.	Black	USB102BK
	Brown	USB102
	Gray	USB102GY
	Ivory	USB102I
	Light Almond	USB102LA
	White	USB102W

2X2 USB Work Surface Pop-Up Boxes

Surface Dimensions	Cut Out Dimensions	Product Depth	Maximum Surface Thickness	Finish	Catalog Number
5" x 5"	4.62" x 4.62"	3.55"	1.125"	Brushed Aluminum	WSBUSB2X2ALU
5" x 5"	4.62" x 4.62"	3.55"	1.125"	Black Powder Coat	WSBUSB2X2BLK

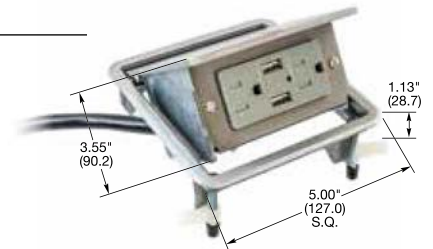

WSBUSB2X2ALU

PlugTrak® Raceway with USB Charger Outlets

USB type 2.0 ports, 2.4 Amp, 5 Volt DC, 15 Amp, 125 Volt AC receptacles.

Material	Length	Ends	# of USB Ports	# of Single Receptacles	Color	Catalog Number
Steel	3 ft.	6 in. leads	2	2	Ivory	HBL20GB312UIV
Steel	6 ft.	6 in. leads	4	4	Ivory	HBL20GB612UIV
Aluminium	3 ft.	6 in. leads	2	2	Aluminum	HBLALU20GB312U
Aluminium	6 ft.	6 in. leads	4	4	Aluminum	HBLALU20GB612U
Non-metallic	6 ft.	6 in. leads	4	8	Office White	PT156112U*
Portable - Plug in						
Steel	40 in.	6 ft. cord and plug	2	4	Ivory	HBL20C215UIV
Non-metallic	36 in.	6 ft. cord and plug	2	4	Office White	PT153112UP*



HBL20GB312UIV

HBLALU20GB612U

PT153112UP

Note: *For additional colors add "BK" for Black or "W" for white.

Dimensions in Inches (mm)