

EV•LED

FAMILY



Value
Design
Aesthetics
Performance
Sustainability

Value. Performance. Design. Sustainability. Aesthetics.



EVE
LED Exit Sign

- Architectural, cloud-like housing with thin profile
- Long-Life Nickel Metal Hydride battery
- 10 year LED lifecycle
- Universal wall, end or ceiling mount with canopy



EVHC
High Lumen LED Emergency Light

- Designed for mounting heights from 9-20 feet
- High lumen option exceeds 50W halogen lamp
- Lithium Iron Phosphate battery offers 30% greater life
- Lifetime warranty for LEDs



EVC
LED Combination Exit/Emergency Light

- Fully aimable, dual-ratcheting high output LED lamp-heads
- No-head option for up to 4 LED remotes
- Wall, ceiling or end mounting options
- Long life-cycle Lithium Iron Phosphate battery

EV
LED Emergency Light

- Fully aimable optics providing up to 27' spacing
- High output LEDs provide uniform light patterns
- Capacity for single or double remotes
- "Green" Nickel Metal Hydride battery



EVO
Outdoor LED Remote

- Fully aimable single or double lamp-head
- Can be located up to 50' from external power source
- Durable Die-Cast aluminum lamp housing and mounting plate



EVR
Indoor LED Remote

- Fully aimable optics providing up to 27' spacing
- High output LEDs provide uniform light patterns
- 50% less plastic than traditional remote units
- Wall or ceiling mounting options



EV4R
Recessed Ceiling-Mount Indoor LED

- Up to 42' spacing
- Compact, low-profile design
- Rectangular or round trim-plate in white or black finish
- 30% greater battery life and Lifetime LED Warranty



Value | Trusted Brand

- Extended product warranties
- Reduced maintenance costs
- Simplified installation

Design | Ease of Installation and Maintenance

- Easy, quick installation
- Fully aimable, thermally controlled lamp-heads
- Long life-cycle LEDs rated at 100,000 hours
- Premium battery types offer up to 30% greater life-cycle than lead acid

Aesthetics | Sleek Architectural Styling

- Integral LED lamp-heads
- Sleek, visually appealing
- Soft rounded contours and cloud-like appearance
- Sturdy and robust construction

Sustainability | Our Future

- Up to 50% reduction in packing and plastic content
- Reduced input power requirements
- LED life-time warranty
- “Green” power sources

Performance | Sophisticated LED Based Lamp-head

- Offers 30% greater illumination than traditional incandescent lamps
- Indoor and Outdoor remotes offer superior light output
- Up to 83' spacing
- Optional damp, remote capacity and Spectron® self-test/self-diagnostics
- Longer lasting battery technology

Acrylic lens provides optimal light transmission

LED offers cool white lamp color providing maximum light coverage with no hot spots

Die-cast aluminum for thermal dissipation

Fully aimable lamp-head

EV4R SERIES LED Emergency Light

- Recessed to 0.20" reveal
- Low-profile

Steel back-box includes caddy bar assembly



Adjustable lamp-head maximizes spacing

Powerful LED optical assembly

Includes rectangular or round trim-plate





EVR
Indoor LED Remote
Doubles the Spacing
Powered by Combo or Unit
LED Lifetime Warranty



EVC
LED Combination Exit/Emergency Light
Coverage of 16' X 10'
Fully Adjustable Integral LED Heads
No-Head Option Runs 4 Remotes
LED Lifetime Warranty



EV4R
Recessed Ceiling-Mount Indoor LED
Up to 42' spacing
Compact, low-profile design
Rectangular or round trim-plate in white or black finish
30% greater battery life and Lifetime LED Warranty



EVE
LED Exit Sign
Bright Panel Face Illumination
10 Year LED Lifecycle
Long-Life NiMH Battery



EV
LED Emergency Light
Spacing Up To 27'
-02L Option Increases Spacing to 39' (3' path)
LED Lifetime Warranty



EVO
Outdoor LED Remote
Sealed and Gasketed for Outdoor use
Matching Long-Life LEDs
Powered by Combo or Unit
LED Lifetime Warranty



EVCURWD4



EVR

EV4D

REMOTE CAPACITY

EVO



SINGLE UNIT COVERAGE

The below illustration provides an example of Side-to-Side or Forward Throw configurations.


Wall Mounted
(Single Unit Coverage - 1 FC Avg)
Commercial Parameters R=80/50/20

	EVHC12-06L	EVHC-03L
Ceiling Height	15'	12'
Mounting Height	12'	9'
Max Spacing 6' Path	66'	48'
Max Forward Throw 10' Path	43'	34'

The EVHC Series meets proposed California Energy Commission(CEC) requirements for limits on power consumption in maintenance mode with less than 0.5 watts.



EVHC
High Lumen LED Emergency Light
Bright, even illumination for mounting from 9-20 feet
Best in Class Spacing performance
Available with remote capacity and matching remote

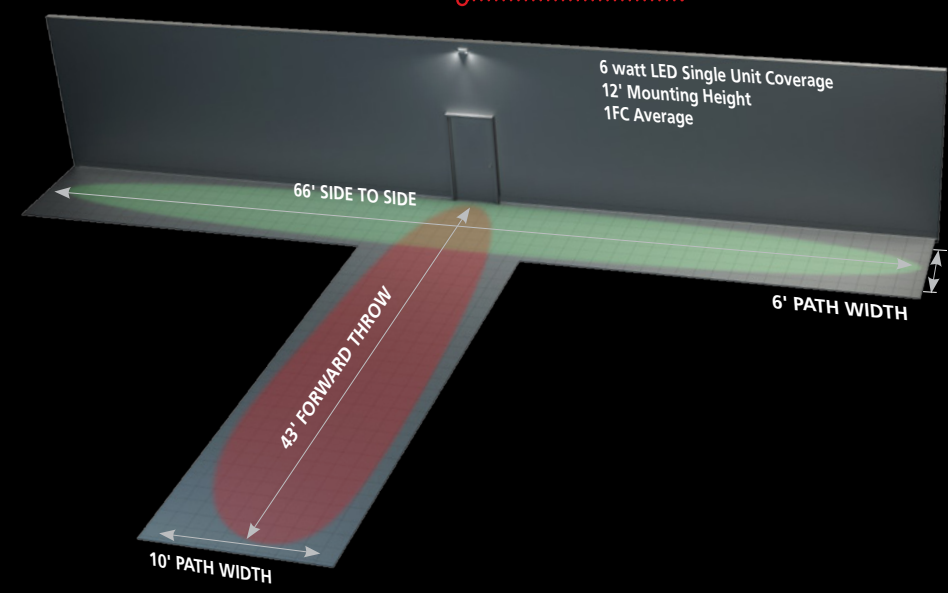



701 Millennium Blvd.
Greenville, SC 29607
hubbellighting.com

ALERA LIGHTING

ARCHITECTURAL AREA LIGHTING

BEACON PRODUCTS

COLUMBIA LIGHTING

COMPASS

DEVINE LIGHTING

DUAL-LITE

HUBBELL CONTROL SOLUTIONS

HUBBELL INDUSTRIAL LIGHTING

HUBBELL OUTDOOR LIGHTING

KIM LIGHTING

KURT VERSEN

LITECONTROL

PRECISION-PARAGON [P2]

PRESCOLITE

PROGRESS LIGHTING

SPAULDING LIGHTING

SPORTSLITER SOLUTIONS

STERNER

WHITEWAY

