

LITEPAK LNC2 PRISMATIC REFRACTOR WALLPACK



The award winning Litepak LNC2 luminaire now features an industry leading prismatic refractor option for the ultimate combination of performance and visually appealing perimeter illumination. Additionally, the LNC2 can be specified with energy saving controls and/ or egress options. The Litepak LNC2 luminaire is available in multiple lumen packages providing safety, security and identity.

- Prismatic refractor lens for optimal visual comfort and performance
- Optional photocell, occupancy sensor and battery backup
- Optional Four - 1/2" threaded surface conduit entries
- IP65 rated
- DLC qualified*



Prismatic Lens
Specially design prismatic refractor lens provides improved visual comfort and superior light output and performance.




Quick Mounting
Quick-mount – easy mounting without opening fixture. Attach adapter plate to wall, connect wires, hang fixture and tighten set screws.



Photo Control
Optional factory installed top mounted button photocontrol.



PERFORMANCE

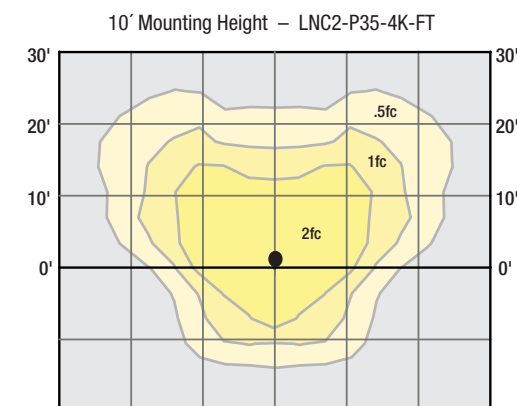

CONTROLS

SCP programmable sensor offers greater control and energy savings including adjustable delay and dimming levels.



EGRESS/BATTERY BACK UP

Battery backup unit features Spectron self diagnostic push-to-test status indicator and delivers Life Safety Code average illumination of 1.0 FC. EH option includes heater for ambient temperatures as low as -30°C.



* DesignLights Consortium (DLC) qualified, consult DLC website for more details: <http://www.designlights.org/OPL>

