




[Catalog Home](#)

Product Datasheet


ANDERSON FARGO

JTF16 -- Compression Terminal

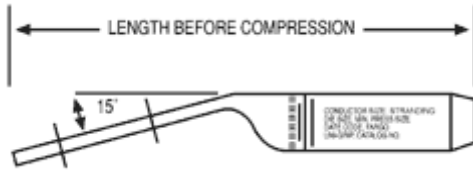

Compression Terminal, Uni-Grip, Jumper Terminal, 15 degree, Conductor Range, Range 1.426-1.520

Product Specifications

<p>Series</p>	 <p>JTF Series</p> <p>Compression Terminal 15 degree, Partial Tension AAC, AAAC, ACAR & ACSR Conductor</p>
<p>PDF Catalog Page</p>	<p>Click HERE to view the web page.</p>
<p>Conductor Range (in)</p>	<p>1.426-1.520</p>
<p>Length before Compression</p>	<p>14.2 in (360 mm)</p>
<p>Pad Width</p>	<p>3.0 in (76 mm)</p>
<p>Pad Holes</p>	<p>4</p>
<p>Compression Method</p>	<p>Uni-Grip (single die)</p>
<p>Material & Connection Method</p>	<p>Aluminum Compression</p>
<p>Die Size</p>	<p>16CD</p>
<p>Minimum Press (Tons)</p>	<p>60</p>
<p>Voltage Application</p>	<p>EHV & Std</p>
<p>Inhibitor Loaded</p>	<p>Yes</p>
<p>Conductor Minimum - Maximum Range</p>	<p>AAC 1590 kcmil (61) thru AAC 1700 kcmil (91) ACSR 1431.0 kcmil (45/7) thru ACSR 1590 kcmil (45/7)</p>
<p>Material Type</p>	<p>Non-Standard</p>
<p>UPC Code</p>	<p>09635940119</p>
<p>Standard Package</p>	<p>1</p>
<p>Standard Package Unit</p>	<p>Each</p>
<p>MOQ</p>	<p>1</p>
<p>Weight / Ea.</p>	<p>3.949 lbs</p>

Notes


To specify stainless steel hardware add "SS" suffix to catalog number.

Features

Jumper terminals are prefilled with inhibitor. Taper and pad are coated with protective strippable plastic and bore is capped. Tongue holes have NEMA spacing. Standard hardware includes one Aluminum 1/2-13 bolt, nut and two aluminum washers per .56 diameter hole.

Compressed Product Number

JTF16

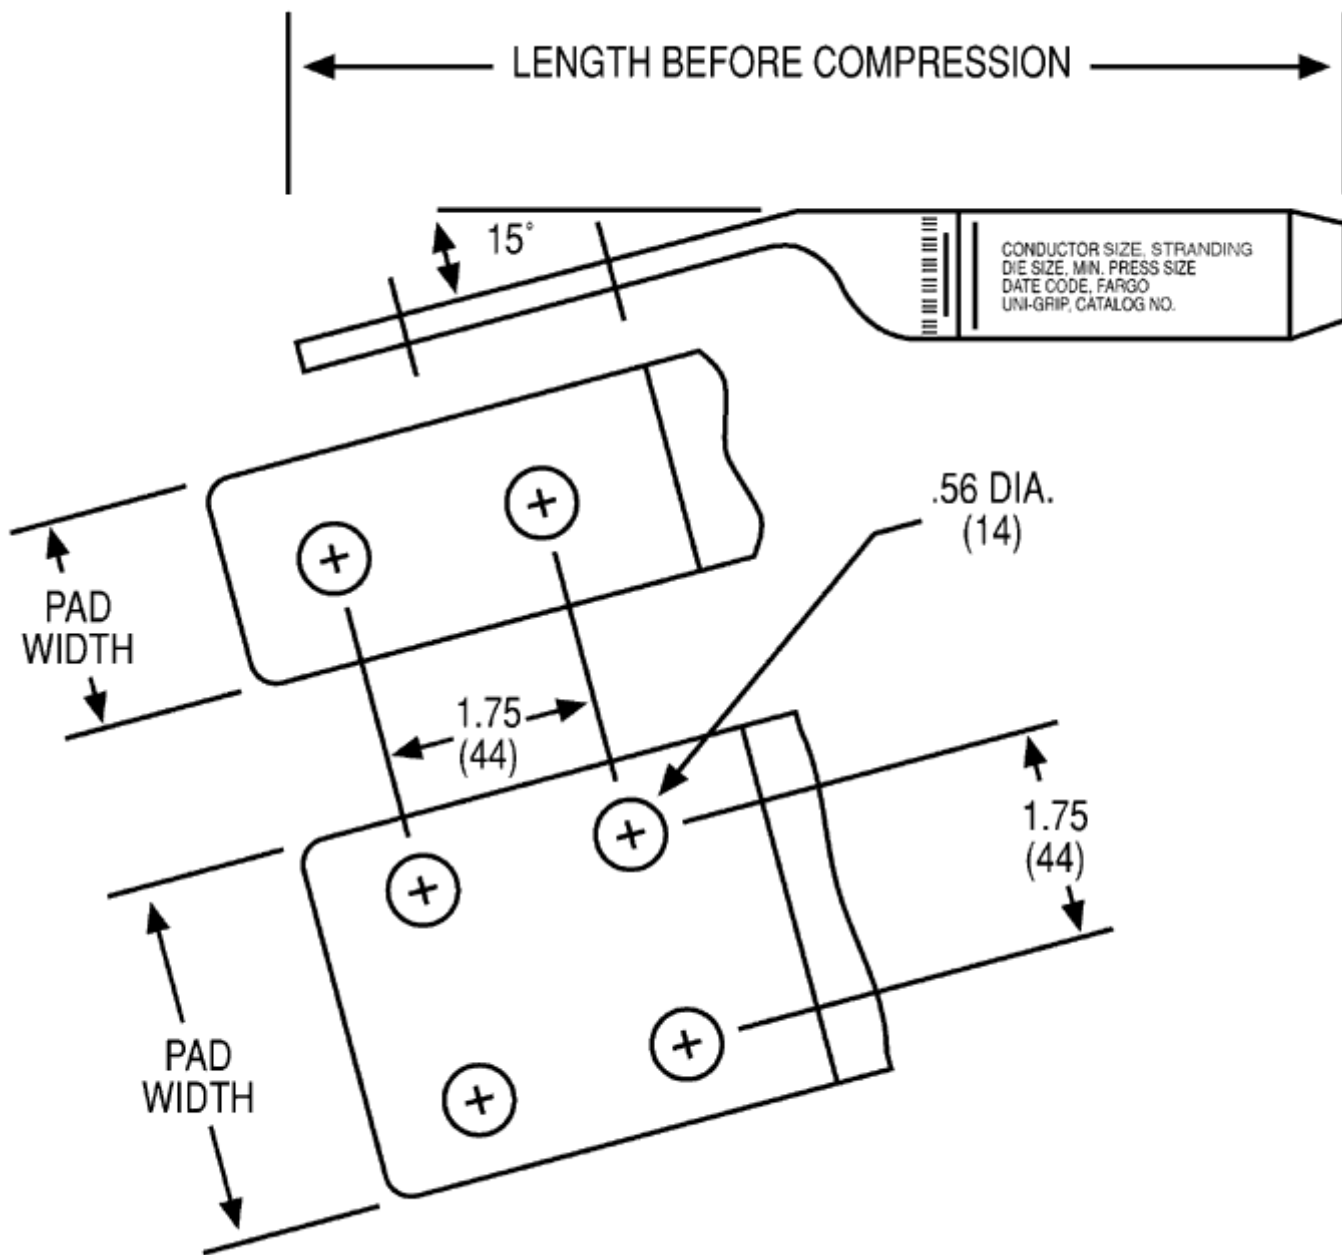

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.