


- NOTES:
1. MAXIMUM CONTINUOUS LINE TO GROUND OPERATING VOLTAGE, 48 KV RMS.
  2. DUTY CYCLE VOLTAGE RATING 60 KV
  3. NET WEIGHT 117 lbs(53,23 kg)
  4. DIMENSIONS SUBJECT TO ± 3% TOLERANCE.
  5. LEAKAGE DISTANCE - 83.9 (2131)
  6. DIMENSIONS ARE INCHES (MM)
  7. CLAMP TYPE GROUND TERMINALS SUITABLE FOR COPPER OR ALUMINUM CONDUCTORS .25(7) - .81(21)

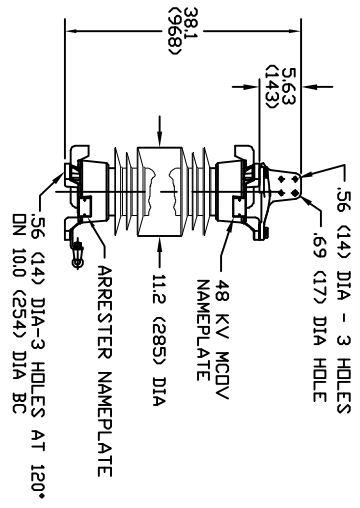

GRAY SILICONE RUBBER  
ALTITUDE TO 12,000 FT (3600 METERS)

.5 μ SEC 10KA	.5 KA SWITCHING	MAX IR USING 8 X 20 μS CURRENT WAVE KV	152	107	118	124	129	138	150	166
IR KV	SURGE IR KV									

ANSI STATION CLASS ARRESTER

**HUBBELL/BRASS**  
TOLERANCE CHART

CONFIDENTIAL: THIS DRAWING AND ITS CONTENTS ARE CONFIDENTIAL AND THE EXCLUSIVE PROPERTY OF HUBBELL POWER SYSTEMS. NO PARTS, INFORMATION, DISTRIBUTION OR COPIES MAY BE MADE WITHOUT THE WRITTEN CONSENT OF HUBBELL POWER SYSTEMS. UNPUBLISHED HUBBELL POWER SYSTEMS. COPYRIGHT © 2007 HUBBELL POWER SYSTEMS.

TITLE: **HUBBELL POWER SYSTEMS**  
ARRESTER SVN  
48 KV MCDV

SIZE: S  
DWG NO.: --  
CAT / PART / ASSY NO.: SVN060GA048AA

DO NOT SCALE THIS DRAWING

DRN BY: JVR DATE: 06/29/07 SHEET 1 OF 1

REV DATE: 06/29/07