



[Catalog Home](#)

Product Datasheet

ANDERSON FARGO

SEDA2209 -- Compression Deadend



Compression Deadend, Conventional 2-Die, Single Tongue, for ACSR 556.5 kcmil 26/7, With Terminal

Product Specifications

Category Image




**Compression
Deadend
Assemblies**

Aluminum

Conventional (two die)

AAC, ACSR, & ACSS
Conductor

Series Image (Comp Assy)

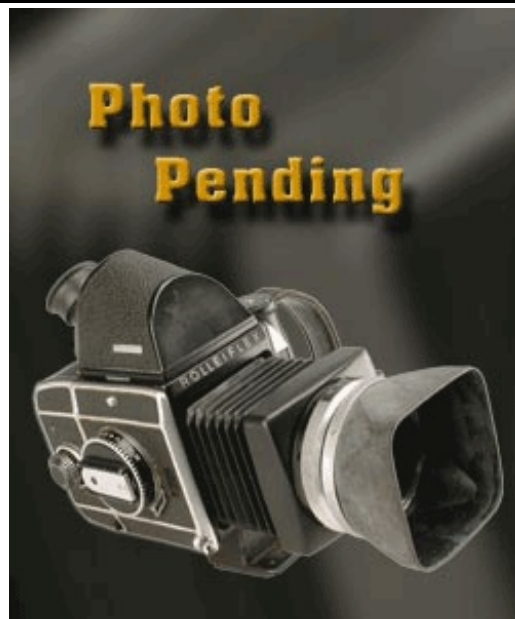


	Click HERE to view the web page.
Terminal Option	With
Style	Conventional 2-Die, Single Tongue
Outside Diameter	0.927 in
Type	Compression
Material	Aluminum/Steel
Compression Method	Conventional (2 die system)
Aluminum Die	24AH
Steel Die	12SH
Minimum Press (Tons)	60
Voltage Application	Std
Inhibitor Loaded	No
Body Material	Seamless Extruded Aluminum Alloy
Eye Material	Galvanized Forged Steel
Terminal Material	Seamless Extruded Aluminum Alloy
Hardware Material	Aluminum Alloy
Length before Compression	15.8 in (401 mm)
Dimension A	2.5 in (63 mm)
Dimension B	1.0 in (25 mm)
Dimension C	0.55 in (14.0 mm)
Pad Width	3.0 in (76 mm)
Bolt Holes	4
Conductor Range Minimum - Maximum	ACSR 556.5 kcmil (26/7) Dove
Weight / Ea.	6.36 lbs
Standard Package	1

Notes

To specify double-tongue deadend, change first character of Catalog Number from S to D.

Compressed Product Number

SEDA2209

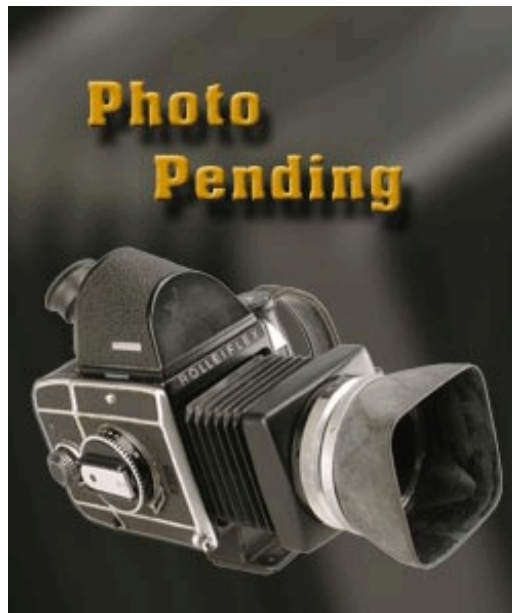

Dimensions

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.