
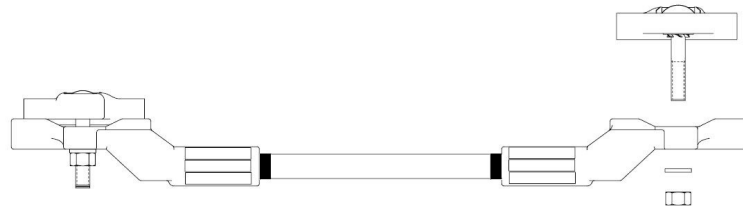


Fiberglass Secondary Connector (Sectionalizer)

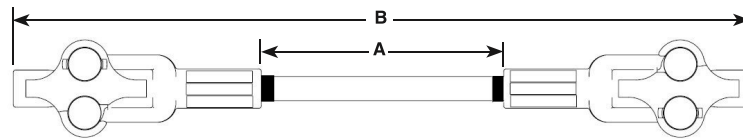

Catalog Number	Length A	Length B	Conductor Size		Weight (Each)	Minimum Ultimate (Crimp)	End Fittings	Fiberglass Rod	Voltage Rating
			Minimum	Maximum					
Ultraviolet-resistant Fiberglass rod									
PSC6531895	6" (15.2 cm)	18.8" (47.8 cm)	0.16" (0.4 cm)	0.57" (1.4 cm)	4.0 lbs. (1.8 kg)	6000 lbs.	HDG Ductile Iron	Veiled	600V
PSC6531955	6" (15.2 cm)	18.0" (45.7 cm)	0.16" (0.4 cm)	0.57" (1.4 cm)	1.9 lbs. (0.9 kg)	6000 lbs.	Tin Coated Aluminum	Veiled	600V
PSC6532012	6" (15.2 cm)	18.8" (47.8 cm)	0.16" (0.4 cm)	0.57" (1.4 cm)	4.0 lbs. (1.8 kg)	6000 lbs.	HDG Ductile Iron	Silicone Coated	1200V
PSC6532013	6" (15.2 cm)	18.0" (45.7 cm)	0.16" (0.4 cm)	0.57" (1.4 cm)	1.9 lbs. (0.9 kg)	6000 lbs.	Tin Coated Aluminum	Silcone Coated	1200V

Used to section (or "split") a secondary conductor.

Captive hardware included.

Recommended hardware torque: 20 to 25 ft.-lbs.

Secondary conductor slip rating dependant on wire size and material.

Meant for use on secondary systems of 600V or less.