


S025064S2010

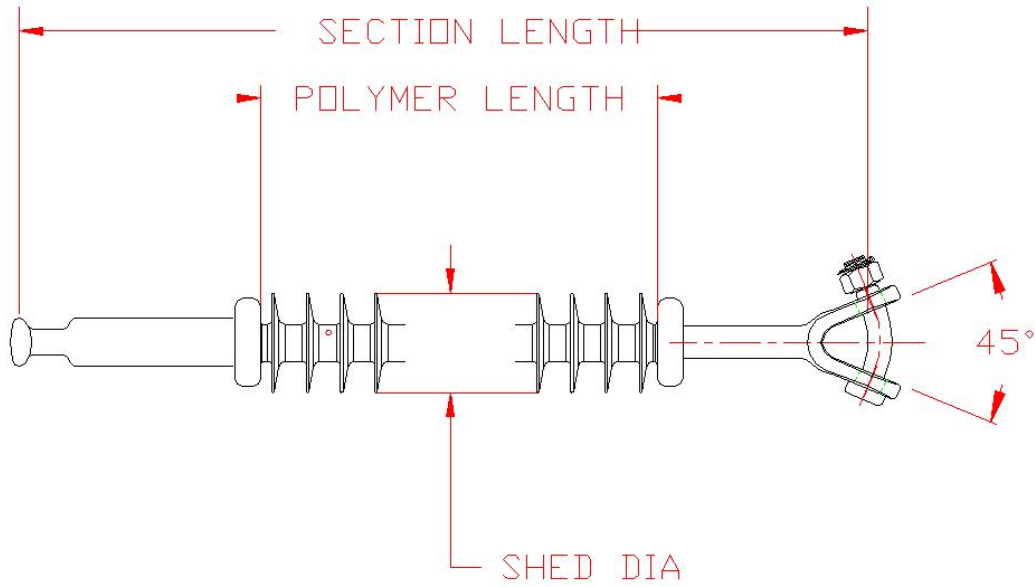


Product Specifications

Typical System Voltage	230kV
Strength Class	25 kip, 5/8" (16 mm)
Top/Ground End Fitting	Y-Clevis
Bottom/Line End Fitting	ANSI Ball
Section Length	76.5 IN (1943 mm)
Leakage Distance	165 IN (4191 MM)
Corona Ring	None
Polymer Length	64.7 IN (1643 MM)
System Voltage (kV)	230kV
Working Load	12,500 lbs
Dry Arc Distance	64.7 IN (1644 MM)
Number of Sheds	60
Shed Style	Uniform
Shed Diameter	2.9 IN
Rod Diameter	5/8 IN (16 MM)
Thickness of housing over Rod	> 3MM
End Fitting Class	ANSI
End Fitting Material	Ductile Iron
SML	25,000 lbs
RTL	12,500 lbs
ANSI 60Hz Dry FO	660 kV
Housing Material	SILICONE RUBBER
ANSI 60Hz Wet FO	615 kV
ANSI 60Hz Wet Withstand	405 kV
IEC lightning Impulse Withstand - Positive	1065 kV
ANSI Critical Impulse FO - Positive	930 kV
IEC lightning Impulse Withstand - Negative	1075 kV
ANSI Critical Impulse FO - Negative	940 kV

Compressed Product Number

S025064S2010

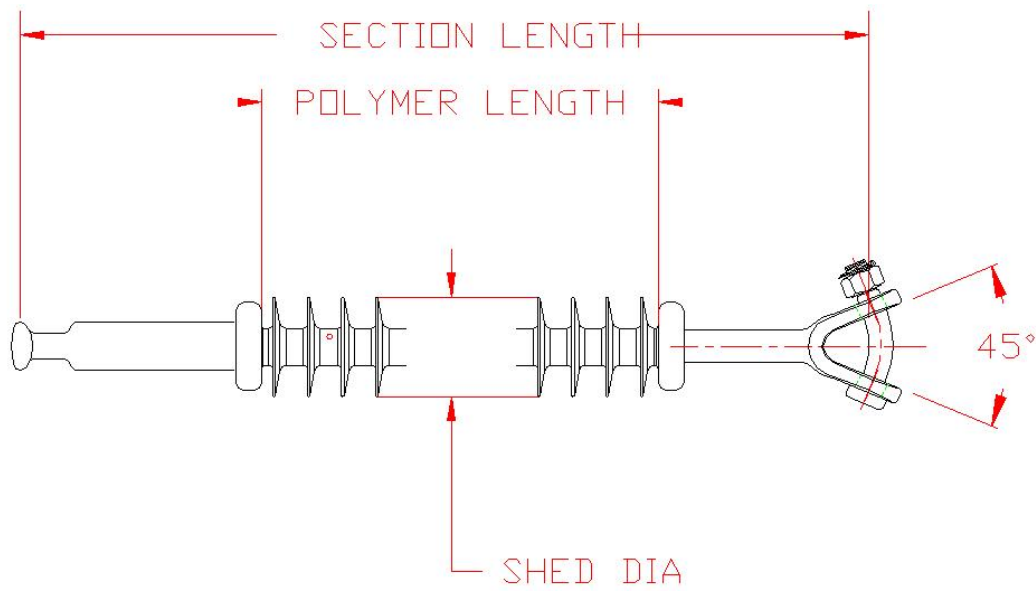

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.