


Medium Duty Deadend Arms

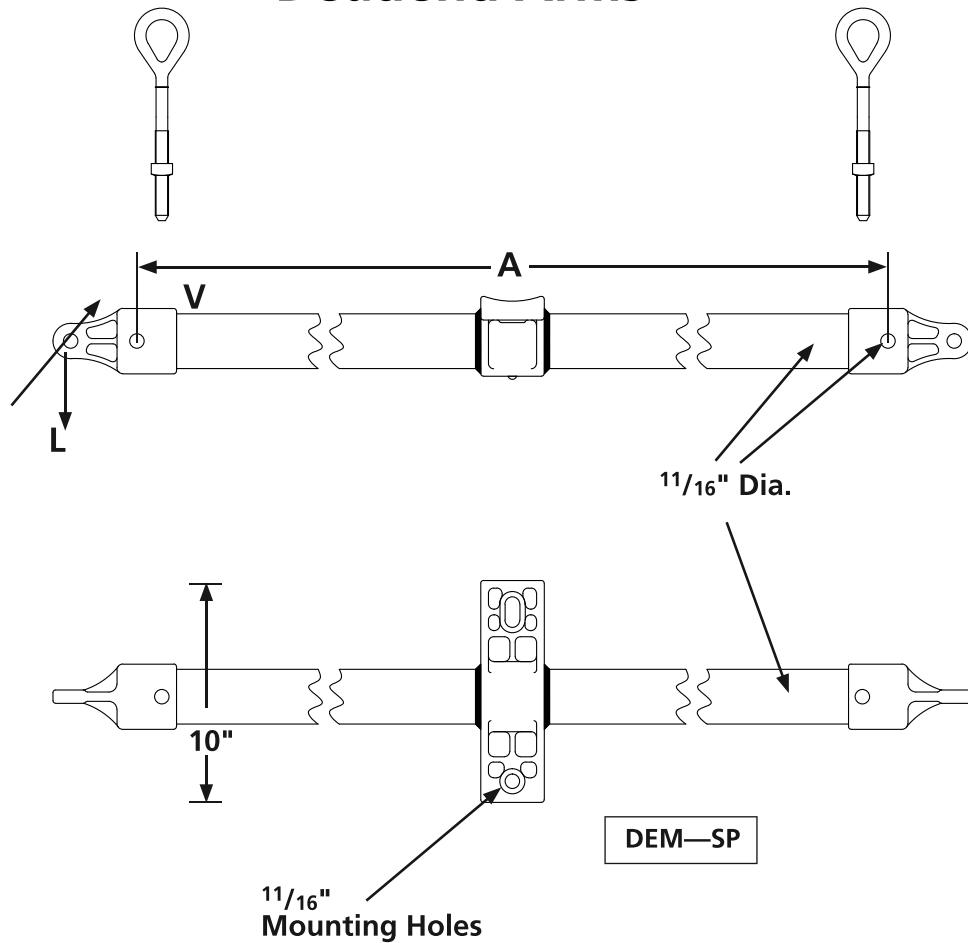

Base and End Fittings are aluminum alloy.

Catalog Number	Length A	Minimum Ultimate* (Balanced)		Weight (Each)
		Vertical V	Longitudinal L	
Medium Duty 2½" (63.5 mm) Dia. Fiberglass Rod				
DEM36SP	36" (91.4 cm)	6000 lbs. (2722 kg)	7500 lbs. (3402 kg)	18.7 lbs. (8.4 kg)
DEM42SP	42" (106.7 cm)	5200 lbs. (2359 kg)	6500 lbs. (2948 kg)	20.7 lbs. (9.4 kg)
DEM48SP	48" (121.9 cm)	4400 lbs. (1996 kg)	5500 lbs. (2495 kg)	22.8 lbs. (10.3 kg)
DEM54SP	54" (137.2 cm)	3440 lbs. (1560 kg)	4300 lbs. (1950 kg)	24.8 lbs. (11.2 kg)
DEM60SP	60" (152.4 cm)	2400 lbs. (1089 kg)	3000 lbs. (1361 kg)	26.8 lbs. (12.2 kg)
DEM36SPEB	36" (91.4 cm)	6000 lbs. (2722 kg)	7500 lbs. (3402 kg)	18.7 lbs. (8.4 kg)
DEM42SPEB	42" (106.7 cm)	5200 lbs. (2359 kg)	6500 lbs. (2948 kg)	20.7 lbs. (9.4 kg)
DEM48SPEB	48" (121.9 cm)	4400 lbs. (1996 kg)	5500 lbs. (2495 kg)	22.8 lbs. (10.3 kg)
DEM54SPEB	54" (137.2 cm)	3440 lbs. (1560 kg)	4300 lbs. (1950 kg)	24.8 lbs. (11.2 kg)
DEM60SPEB	60" (152.4 cm)	2400 lbs. (1089 kg)	3000 lbs. (1361 kg)	26.8 lbs. (12.2 kg)

*Recommended maximum working load is 50% of minimum ultimate ratings listed.
Consult factory for additional lengths.

