



**POWER  
SYSTEMS, INC.**

*In the world of power transmission and distribution, look to Hubbell.*

**Interactive  
eCatalog**

[Catalog Home](#)

**Product Datasheet**

**ANDERSON FARGO**

**GD447 -- Aluminum Automatic Dead End**



Aluminum Automatic Dead End, AAC, AAAC, ACSR Conductor .400 - .470" (10.15 - 11.94 mm), Clevis Bail

**Product Specifications**

**Category Image**



**Automatic Deadends**

Copper and Aluminum  
AAC, AAAC, ACAR, ACSR,  
Copper & Copperweld®  
Conductor

**Series Image (Automatic)**



**GD-44 Series**

Automatic Dead End

Clevis Bail

AAC, AAAC & ACSR  
Conductor

**PDF Catalog Page**

[Click HERE to view the web page.](#)

**Bail Option**

Clevis Bail

**Type**

Automatic

**Material**

Aluminum

**Inhibitor Loaded**

Yes

**Shell Material**

High Strength Aluminum Alloy

**Bail Material**

Galvanized Steel

**Clevis Pin Material**

Galvanized Steel

**Cotter Pin Material**

Stainless Steel

**Assembly Rating (Ultimate)**

95% Conductor RBS

**Dimension A**

17.8 in

**Dimension B**

9.3 in

**Diameter Range**

.400 - .470 in (10.15 - 11.94 mm)

**Color Code**

Gray

**Conductor Range Minimum - Maximum**

AAC 2/0 str (7) Thru AAC 3/0 str (19)  
AAAC 2/0 str(7)  
ACSR 2/0 (6/1) Thru ACSR 101.8 kcmil (12/7)

**Minimum Conductor Diameter**

0.4

**Maximum Conductor Diameter**


0.47

**Weight / Ea.**

2.45 lbs

Standard Package	10
UPC Code	09635930906

<b>Compressed Product Number</b>
GD447

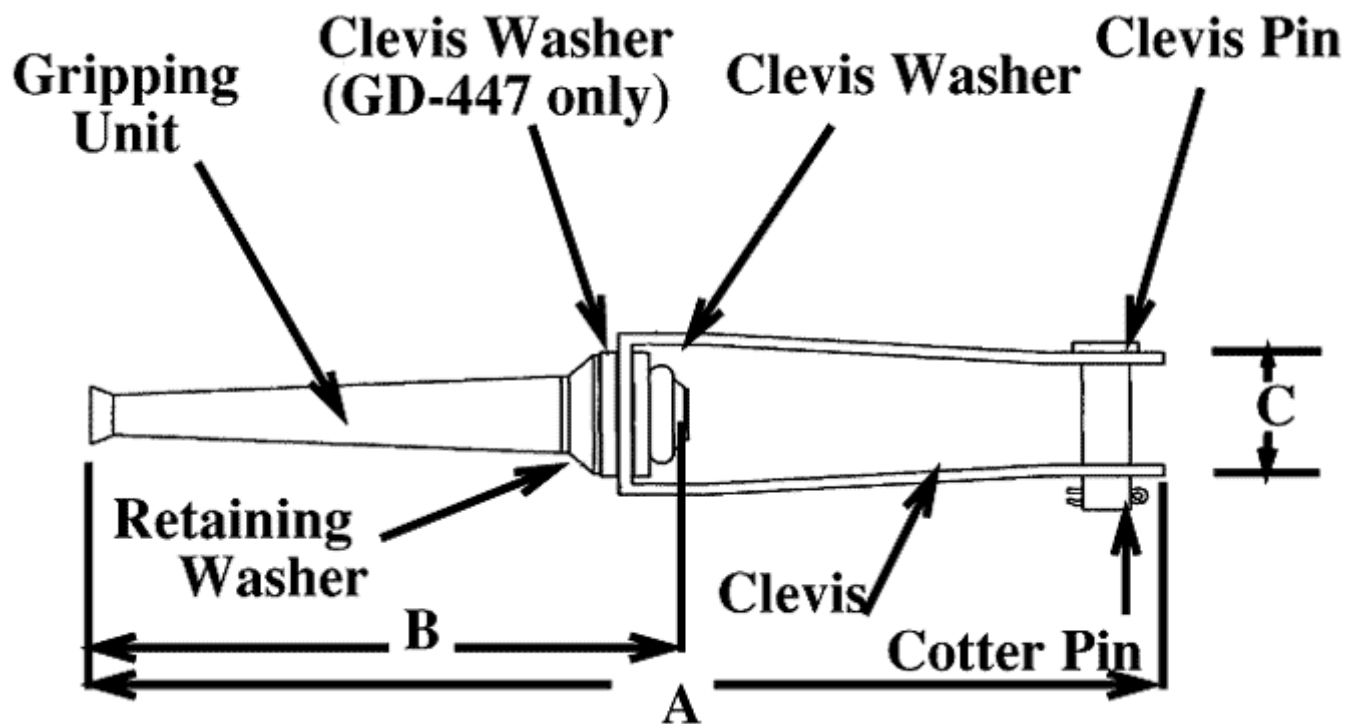

Dimensions

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.