


## 36,000 lb. SERIES Guy Strains - Clevis / Clevis

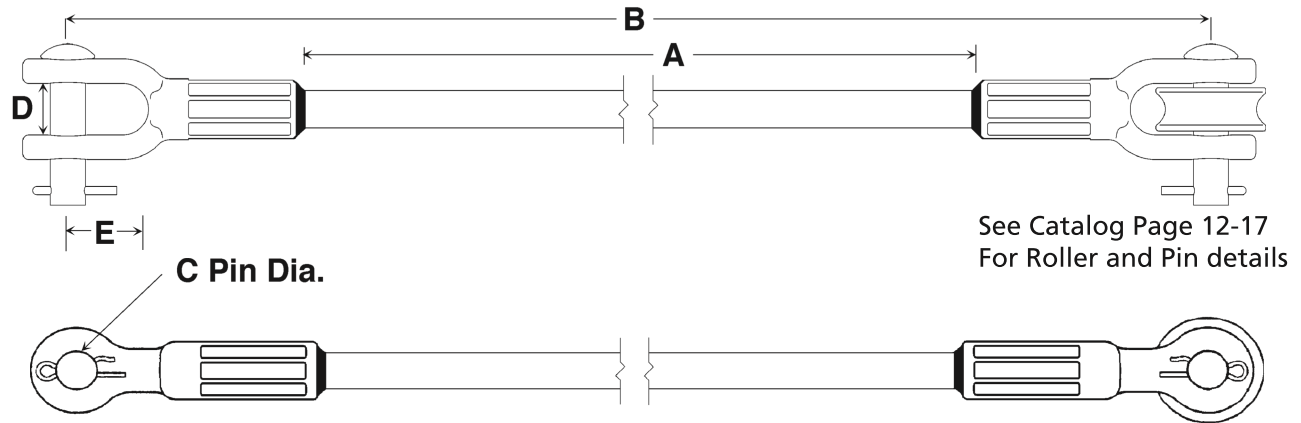

See Note For Roller Configurations

- C Dimension is 7/8" (22 mm) for 36,000 lbs. series
- D Dimension is 1" (25 mm) for 36,000 lbs. series
- E Dimension is 2.12" (53 mm) for 36,000 lbs. series

7/8" dia. Fiberglass rod.

Castings are hot-dip galvanized ductile iron.

Catalog Number	Length A	Length B	Weight (Each)
<b>36,000 lbs. (16,200 kg) Minimum Ultimate Strength*</b>			
GS36018CC1	18" (45.7 cm)	33" (83.8 cm)	8.8 lbs. (4.0 kg)
GS36036CC1	36" (91.4 cm)	51" (129.5 cm)	9.6 lbs. (4.4 kg)
GS36054CC1	54" (137.2 cm)	69" (175.3 cm)	10.3 lbs. (4.7 kg)
GS36060CC1	60" (152.4 cm)	75" (190.5 cm)	10.5 lbs. (4.8 kg)
GS36078CC1	78" (198.1 cm)	93" (236.2 cm)	11.2 lbs. (5.1 kg)
GS36096CC1	96" (243.8 cm)	111" (281.9 cm)	12.0 lbs. (5.4 kg)
GS36120CC1	120" (304.8 cm)	135" (342.9 cm)	12.9 lbs. (5.8 kg)
GS36144CC1	144" (365.8 cm)	159" (403.9 cm)	13.8 lbs. (6.3 kg)

GS—CC1 series has 1 Roller as detailed in drawing

For 2 Rollers, replace "CC1" in number with "CC2"

For no Rollers, replace "CC1" in number with "CC"

Consult factory for additional lengths.

Add "SC" suffix to the end of the catalog number to denote Silicone Coated Rod

**\*Recommended maximum working load is 50% of minimum ultimate ratings listed.**