



[Catalog Home](#)

Product Datasheet


ANDERSON FARGO

CFST288N -- Suspension Clamp




Suspension Clamp, Aluminum, EHV or Std Voltage, for use with T2 conductors 0.753 - 0.888 with fitting: None

Product Specifications

Series	 <p>CFST2 series EHV or Standard Voltage for use on T2 conductor</p>
Fitting	None
Clamp Material	Aluminum
Fitting Catalog No.	-
Ultimate Body Strength	20,000 lbs (9,072 kgs)
Maximum Take-off Angle 0	17.5
Dimension H	2.50 in (63.5 mm)
Dimension J	0.500 in (12.7 mm)
Dimension L	8.44 in (214.3 mm)
Dimension W	2.00 in (50.8 mm)
Dimension PD	0.625 in (15.9 mm)
Hardware Material	Galvanized Steel
Minimum - Maximum Conductor Size	AAC 450 kcmil (37) Thru AAC 4/0 str (19) w/Armor Rods AAAC 466.3 kcmil str (19) Thru AAAC 3/0 str(7) w/Armor Rods ACSR 397.5 kcmil (24/7) Thru ACSR 134.6 kcmil (12/7) w/Armor Rods ACAR 503.6 kcmil (15/4) Thru ACAR 587.2 kcmil (15/4)
Clamping Range	0.75 - 0.89 in (19.13 - 22.56 mm)
Voltage Application	EHV
Material Type	Non-Standard
UPC Code	09635934974
Standard Package	1
Standard Package Unit	Each
Min Order Qty	1
Weight / Ea.	2.744 lbs

Compressed Product Number

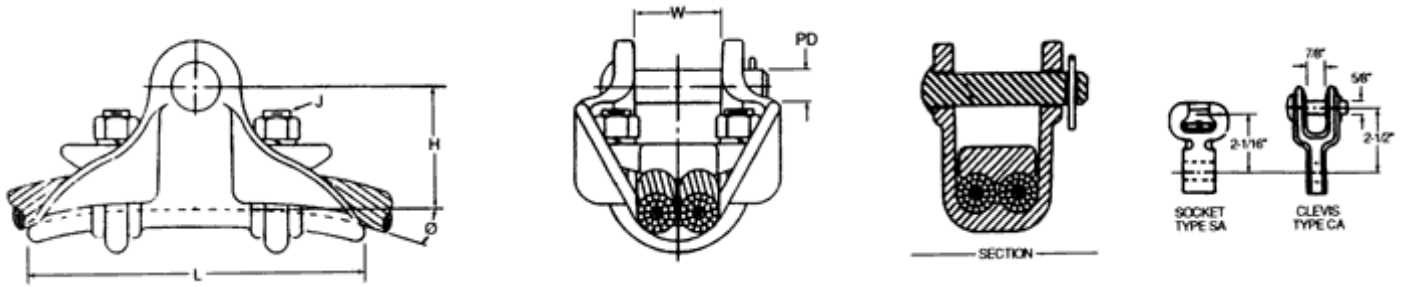

[Catalog Home](#)



[Warranty Info](#) | [Trademarks](#) | [Terms of Use](#)

All contents Copyright © 2007 Hubbell Power Systems, Inc. All rights reserved.

NOTE: Because Hubbell has a policy of continuous product improvement, we reserve the right to change design and specifications without notice.