



Main

Accessory / separate part category	Cabling accessory
Accessory / separate part type	Pre-wired connectors
Series name	General purpose

Complementary

Electrical connection	M12, 4 pins straight female connector
Cable connector fixing	Screw-on
Collar material	Metal
Status LED	Without
Cable length	32.81 ft (10 m)
Cable outer diameter	0.18 in (4.6 mm)
Cable composition	4 x 0.25 mm ²
Wire insulation material	PVC
System Voltage	250 V AC 300 V DC
Line Rated Current	3 A
Contact resistance	5000 µOhm
Insulating resistance	1 GΩ
Product weight	0.99 lb(US) (0.45 kg)

Environment

IP degree of protection	IP65 IP67
product certifications	CULus
ambient air temperature for operation	-13...176 °F (-25...80 °C) (static)
ambient air temperature for storage	-13...176 °F (-25...80 °C)


Offer Sustainability

Not Green Premium product	Not Green Premium product
Compliant - since 1201 - Schneider Electric declaration of conformity	Compliant - since 1201 - Schneider Electric declaration of conformity

Contractual warranty

Warranty period	18 months
-----------------	-----------


Dimensions

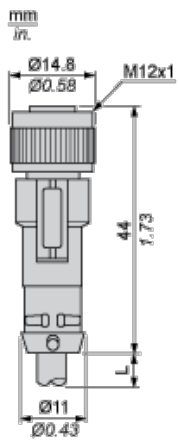

L : Length of cable

Connections and Schemes

Connector



BN : Brown

BK : Black

BU : Blue

WH :White