

ELECTRICAL UTILITIES






RECOGNIZED AND TRUSTED WORLDWIDE, AS THE LEADING SAFETY-AT-HEIGHT COMPANY

Capital Safety™ has been manufacturing the highest quality fall protection equipment for more than 70 years. With more patents, more engineers and more industry innovations than any other fall-protection manufacturer, it's no wonder that Capital Safety's equipment is the most recognized and trusted around the globe. Capital Safety is the world's leader in fall protection because we are dedicated entirely to fall protection.

Workers in the utility industry often face emergency situations where they need versatile fall protection equipment that will not impede their ability to work. DBI-SALA® has been proactive in developing climbing safety equipment and electrical safety equipment for the utility industry where unique hazards are present. Our service doesn't end with the sale. Capital Safety will educate, train and provide extensive long term support to ensure that all aspects of your fall protection program are successful.



WHEN YOUR LIFE IS ON THE LINE, YOU DESERVE THE BEST

- Capital Safety's flagship **DBI-SALA®** has been **the premier brand in fall protection and rescue products** for more than 40 years.
- Legendary for its comfort, ease of use, durability and reliability, **our line of products is 20,000 strong—and growing.**
- Our **products are rigorously tested** to meet or exceed applicable standards around the globe.
- **Our ISO 9001-2008 certification** drives superior engineering, quality manufacturing and unparalleled customer service.
- **Accredited lab testing** means our products will perform like no other.
- We offer a full range of fall protection and industrial rescue **training courses.**
- Every DBI-SALA product carries a **100% satisfaction guarantee** and a **lifetime warranty for manufacturer's defects.**
- Products meet the latest **CSA, OSHA and ANSI** standards for added peace of mind.

Capital Safety's combination of excellent design, rugged quality and expert knowledge will protect you—and your employees—the way you deserve.



Scan here for product information.

CLIMB TO THE TOP WITH DBI-SALA®

Pole climbing is a skill that tests the confidence you have in yourself. Letting go of the pole so you can work hands free tests the confidence you have in your equipment. Having the right tools for the job is essential for the professional lineman.

CYNCH-LOK™

Cynch-Lok™ is the benchmark for all wood pole fall-restricting devices and remains the **number one choice** for working linemen. The innovative and versatile design allows linemen to **move faster, easier and safer** than ever before.

Cynch-Lok features and benefits:

- Pinch-free ergonomic design for ease of use
- Effortless one-handed adjustment
- One-piece construction—no nuts or bolts that can get loose
- Enjoy speed, flexibility and reliability
- Field versatility with rope and web options
- Meets CSA Z259.14 type A and AB, ASTM F887



1204075
CYNCH-LOK WEB FOR DISTRIBUTION POLES
POLE SIZE (DIA/CIRC):
MIN. .1 M/.5 M (5.5"/17.5")
MAX. .5 M/1.5 M (18.5"/58")

1204076
CYNCH-LOK WEB FOR TRANSMISSION POLES
POLE SIZE (DIA/CIRC):
MIN. .1 M/.5 M (5.5"/17.5")
MAX. .8 M/2.4 M (30.5"/96")



1204057
CYNCH-LOK ROPE FOR DISTRIBUTION POLES
POLE SIZE (DIA/CIRC):
MIN. .1 M/.5 M (5.5"/17.5")
MAX. .5 M/1.5 M (18.5"/58")

1204058
CYNCH-LOK ROPE FOR TRANSMISSION POLES
POLE SIZE (DIA/CIRC):
MIN. .1 M/.5 M (5.5"/17.5")
MAX. .8 M/2.4 M (30.5"/96")



1204074

1204077

1204074
CYNCH-LOK REPLACEMENT LEFT-HANDED
SPIKED CARABINER FOR ROPE
17.5 MM GATE (11/16"), CAPTIVE EYE

1204077
CYNCH-LOK REPLACEMENT LEFT-HANDED
SPIKED CARABINER FOR WEB
17.5 MM GATE (11/16"), FOR WEB



1200111
CYNCH-LOK REPLACEMENT STRAP
FOR TRANSMISSION
POLE SIZE (DIA/CIRC):
MIN. .1 M/.5 M (5.5"/17.5")
MAX. .8 M/2.4 M (30.5"/96")



Scan here to view
a demonstration
of Cynch-Lok!



1200115
CYNCH-LOK™ REPLACEMENT
INTERIOR ROPE LANYARD
 KERNMANTLE ROPE, ABRASION RESISTANT
 SLEEVE, WITH FIELD REPLACEABLE STRAPS



1200110
CYNCH-LOK REPLACEMENT STRAP
FOR DISTRIBUTION POLES
 POLE SIZE (DIA/CIRC):
 MIN. .1 M/1.5 M (5.5"/17.5")
 MAX. .5 M/1.5 M (18.5"/58")
 DURABLE STRAP WITH WEAR INDICATOR,
 STOPPING CLEAT, FIELD REPLACEABLE STRAPS



1234070
ADJUSTABLE ROPE
POSITIONING LANYARD
 WITH ROPE ADJUSTER X 2.4 M (8') AND
 STEEL CARABINER AND SNAP HOOK



1200136
CYNCH-LOK REPLACEMENT
INTERIOR WEB LANYARD
 DURABLE POLYESTER WEB, SAFLOK™
 CARABINERS, FIELD REPLACEABLE STRAPS



1234030
ADJUSTABLE WEB
POSITIONING LANYARD
 WITH ROPE ADJUSTER



1234080
ADJUSTABLE ROPE
POSITIONING LANYARD
 WITH BLUE ALUMINUM CARABINERS, ONE
 WITH CAPTIVE EYE 2.4 M (8') LENGTH

1234082 1.8 M (6') LENGTH



1234071
ADJUSTABLE ROPE
POSITIONING LANYARD
 WITH ROPE ADJUSTER AND ALUMINUM
 CARABINER AND SNAP HOOK

EASY TO SET UP AND OPERATE

The Saflok™ Pole Anchor System provides utility pole climbers with 100% fall protection. This unique system allows workers to free climb poles and work around obstructions such as multiple conductors, equipment, vines and other natural obstructions. It allows workers to quickly and safely climb the pole prior to connecting their work positioning system. This system can also make rescuing a fallen worker fast and easy. The installation tool included in the Saflok Pole Anchor System connects to most hot stick poles already available on utility trucks.

SAFLOK™

Extensive field testing by linemen, facility and construction workers has **successfully proven** both the ease of use and fall protection capabilities of the Saflok Pole Anchor System.

Saflok features and benefits:

- Free climb poles while maintaining 100% fall protection
- Installs anchor and lifeline to top of pole from the ground
- Allows user to easily work around obstructions
- Compatible with most hot stick poles (not provided)
- Anchor tube with installation/removal tool
- Dielectric 24.4 m (80 ft.) 16 mm (5/8") lifeline
- Mobile rope grab with EZ-Stop™ shock absorbing lanyard
- Chain tensioner keeps lifeline taut and facilitates rescue
- Weatherproof carrying bag
- Meets applicable OSHA, ANSI and CSA standards



2104803
SAFLOK POLE CLIMBING FALL ARREST SYSTEM
SAFLOK WOOD POLE REMOTE ANCHOR SYSTEM WITH
24.4 M (80 FT.) DIALECTRIC ROPE LIFELINE, ANCHOR TUBE,
INSTALLATION/REMOVAL TOOL, ROPE GRAB WITH SHOCK
ABSORBING LANYARD AND CARRYING BAG





SEAT-BELT™

GET COMFORTABLE WITH A QUALITY PRODUCT YOU CAN TRUST

When working at height, safety is the number one priority – often at the expense of comfort. Our newly designed DBI-SALA® SEAT-BELT™ is made with 100% top grain leather from Red Wing, MN. The SEAT-BELT provides linemen with the ultimate in comfort, durability and function.

SEAT-BELT™ - 4D BELT DESIGNED BY LINEMEN FOR LINEMEN

This innovative, ergonomically designed belt, provides the maximum in comfort, freedom of movement and ease-of-use.

SEAT-BELT features and benefits:

- S-shaped, large full floating D-rings, for hassle free connection
- Patent pending design redirects forces to the top of the belt for improved safety
- Rolled edge adds durability and comfort at the hips
- Small D-rings designed for Cynch-Lok™ fall restrict device
- Patent pending design distributes weight throughout the contoured, reinforced seat for improved work comfort
- Grommet tongue buckle belt provides easy adjustments and improved durability



EXOFIT NEX™

EXOFIT NEX™ LINEMAN SUSPENSION HARNESS WITH 4D SEAT-BELT™

ExoFit NEX™ harnesses are the most advanced harnesses in the industry. They're the culmination of our experience with ExoFit and ExoFit XP, ongoing research and the incorporation of new materials and innovative features. True to our NEX mission, we manufacture these harnesses using materials that won't add unnecessary weight for ultimate comfort. When speed and efficiency are project requirements, ExoFit NEX will provide the freedom and confidence to function at your maximum potential. Finally, ExoFit NEX harnesses are designed using materials that last. Get into the best, the ultimate comfort, function and durability harness, ExoFit NEX.

ExoFit NEX features and benefits:

- Hybrid shoulder and leg comfort padding
- Stand-up Tech-Lite™ aluminum back D-ring
- Tech-Lite aluminum front and suspension D-rings
- Duo-Lok™ quick connect leg and torso straps
- Nylon webbing
- Built-in lanyard keepers
- Impact Indicator
- Protected labels, equipped with i-Safe™
- Tongue buckle style lineman body belt with built-in seat
- Gut strap with locking quick connect buckle
- 2 large S-shaped full-floating D-rings at hips and 2 small D-rings for fall restrict device
- Belt made with 100% top grain leather from Red Wing, MN
- Built-in tool snaps, rings and tape thong
- Available in other harness sizes and belt sizes D18 through D30
- Meets applicable CSA standards, OSHA and ANSI models available





FRONT VIEW



BACK VIEW

1113660C
 EXOFIT NEX™ LINEMAN SUSPENSION HARNESS WITH 4D SEAT-BELT™
 ALUMINUM BACK, FRONT AND SUSPENSION D-RINGS, LOCKING QUICK CONNECT BUCKLE LEG STRAPS AND COMFORT PADDING (SIZE LARGE) WITH 100% TOP GRAIN LEATHER 4D LINEMAN BELT (SIZE D25).

SEAT-BELT 4D LINEMAN BELT				
1001394 D20	1001395 D21	1001396 D22	1001397 D23	1001398 D24
1001399 D25	1001400 D26	1001401 D27	1001402 D28	1001403 D29

EXOFIT NEX LINEMAN SUSPENSION HARNESS WITH 4D SEAT-BELT					
SM	1113645C D19	1113646C D20	1113647C D21	1113648C D22	1113649C D23
MED	1113652C D22	1113653C D23	1113654C D24	1113655C D25	1113656C D26
LG	1113659C D24	1113660C D25	1113661C D26	1113662C D27	1113663C D28
XL	1113664C D25	1113665C D26	1113666C D27	1113667C D28	1113668C D29

2D LINEMAN BELT

This innovative, ergonomically designed belt provides the maximum in comfort, freedom of movement and ease-of-use.

2D Lineman belt features and benefits:

- S-shaped large full floating D-rings, for hassle-free connection
- Grommet tongue buckle belt provides easy adjustments and improved durability
- Rolled edge adds durability and comfort at the hips



1001385
2D LINEMAN BELT
AVAILABLE SIZE D18
THROUGH D30

2D LINEMAN BELT

1001381 D20	1001382 D21	1001383 D22	1001384 D23	1001385 D24
1001386 D25	1001387 D26	1001388 D27	1001389 D28	1001390 D29

EXOFIT NEX™ LINEMAN VEST STYLE HARNESS WITH 2D BELT

SM	1113510C D19	1113511C D20	1113512C D21	1113513C D22	1113514C D23
MED	1113517C D22	1113518C D23	1113519C D24	1113520C D25	1113521C D26
LG	1113524C D24	1113525C D25	1113526C D26	1113527C D27	1113528C D28
XL	1113529C D25	1113530C D26	1113531C D27	1113532C D28	1113533C D29

EXOFIT NEX LINEMAN ARC FLASH HARNESS WITH 2D BELT

SM	1113675C D20	1113676C D21	1113677C D22	1113678C D23	1113679C D24
MED	1113681C D22	1113682C D23	1113683C D24	1113684C D25	1113685C D26
LG	1113686C D23	1113687C D24	1113688C D25	1113689C D26	1113690C D27
XL	1113691C D25	1113692C D26	1113693C D27	1113694C D28	

EXOFIT NEX LINEMAN SUSPENSION HARNESS WITH 2D BELT

SM	1113558C D19	1113559C D20	1113560C D21	1113561C D22	1113562C D23
MED	1113565C D22	1113566C D23	1113567C D24	1113568C D25	1113569C D26
LG	1113572C D24	1113573C D25	1113574C D26	1113575C D27	1113576C D28
XL	1113577C D25	1113578C D26	1113579C D27	1113580C D28	1113590C D29

EXOFIT NEX LINEMAN VEST STYLE HARNESS WITH FRONT D-RING AND 2D BELT

SM	1113593C D19	1113594C D20	1113595C D21	1113596C D22	1113597C D23
MED	1113600C D22	1113601C D23	1113602C D24	1113603C D25	1113604C D26
LG	1113607C D24	1113608C D25	1113609C D26	1113610C D27	1113611C D28
XL	1113612C D25	1113613C D26	1113614C D27	1113615C D28	1113616C D29





EXOFIT NEX™

EXOFIT NEX™ HARNESS WITH 2D BELT

The ExoFit NEX™ is in a class of it's own, providing freedom and the confidence you need to function at maximum potential. The ExoFit NEX Lineman Harness, with 100% top grain leather from Red Wing, MN is the ultimate in comfort, function and durability.

ExoFit NEX features and benefits:

- Duo-Lok™ quick connect buckles
- 2 front D-rings for ladder climbing, rescue or suspension work
- Light-weight leg and back padding with ultra-soft edging
- 190 kg (420 lbs.) capacity
- Revolver™ vertical torso adjusters make adjustments quick and easy, while controlling the webbing
- 2D lineman belt is adjustable for a personal fit
- Meets applicable CSA standards, OSHA and ANSI models available



FRONT VIEW



BACK VIEW

1 1 13573C
 EXOFIT SUSPENSION
 LINEMAN HARNESS WITH
 2D BELT

 DUO-LOK QUICK
 CONNECT BUCKLES,
 TECH-LITE™ ALUMINUM
 FRONT AND BACK D-RINGS



1 1 13608C
 EXOFIT NEX VEST-STYLE
 LINEMAN HARNESS WITH
 2D BELT

 DUO-LOK QUICK
 CONNECT BUCKLES,
 TECH-LITE ALUMINUM
 FRONT AND BACK D-RING

WE GO TO GREAT HEIGHTS WITH YOU

When it comes to climbing steel structures, DBI-SALA® is the best in the business. Our equipment is built for maximum reliability and ease of use. From the strongest rebar hooks to the smallest shock pack, we have the equipment you want.

EZ-STOP™ LANYARDS

EZ-Stop™ shock absorbing lanyards combine a set of “industry-first” advancements, with popular features making them the workhorse of the industry. Today’s EZ-Stop represents the culmination of decades of design, research, manufacturing know-how and on-the-job performance.



1246317
EZ-STOP FORCE2 ADJUSTABLE SHOCK
ABSORBING LANYARD
.....
1.8 M (6') ADJUSTABLE WEB SINGLE-LEG FORCE2
WITH NOMEX®/KEVLAR® FIBER WEB AND SHOCK
PACK, SNAP HOOKS AT EACH END



1246193C
EZ-STOP ELASTIC WEB LANYARD
.....
100% TIE-OFF ALUMINUM SNAP HOOK AT ONE END,
ALUMINUM REBAR (64 MM (2.5") GATE OPENING)
AT LEG ENDS X 1.8 M (6')



1246075
EZ-STOP FORCE2 WRAPBAX WEB
.....
100% TIE-OFF SNAP HOOK AT ONE END,
WRAPBAX HOOK AT LEG ENDS X 1.8 M (6')



1246145
EZ-STOP FORCE2 WRAPBAX ELASTIC WEB
.....
100% TIE-OFF ALUMINUM SNAP HOOK AT ONE END,
ALUMINUM REBAR (64 MM (2.5") GATE OPENING)
AT LEG ENDS X 1.8 M (6')

INDUSTRIES FIRST MODULAR LANYARD REDUCES OVERALL COST OF OWNERSHIP



1246040C
EZ-STOP™ MODULAR WEB LEG
MODULAR CONNECTOR AT ONE END, ALUMINUM
SNAP HOOK AT OTHER END X 1.8 M (6')




1246043C
EZ-STOP MODULAR ELASTIC LEG
MODULAR CONNECTOR AT ONE END, ALUMINUM
SNAP HOOK AT OTHER END X 1.8 M (6')



1246045C
EZ-STOP MODULAR WEB LEGS
100% TIE-OFF, MODULAR CONNECTOR AT ONE END,
STEEL REBAR HOOK (64 MM (2.5") GATE OPENING)
AT LEG ENDS X 1.8 M (6')



1246048C
EZ-STOP MODULAR ELASTIC LEGS
100% TIE-OFF, MODULAR CONNECTOR AT ONE END,
ALUMINUM REBAR HOOK (64 MM (2.5") GATE OPENING)
AT LEG ENDS X 1.8 M (6')

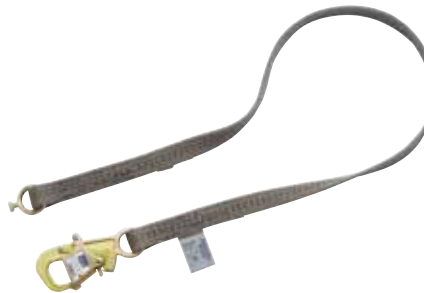

1246050C
EZ-STOP MODULAR LEG WRAPBAX 2
TIE-BACK, SINGLE-LEG WITH 2268 KG (5,000-LB.)
WRAPBAX 2 HOOK AT END X 1.8 M (6')



1246060C
EZ-STOP MODULAR SHOCK PACK
MODULAR CONNECTOR AT ONE END, ALUMINUM
SNAP HOOK AT OTHER END

NANO-LOK™



3101378
 NANO-LOK™ TIE-BACK SRL TWIN LEG
 2268 KG (5,000-LB.) GATED SNAP HOOK WITH
 TWIN LEG QUICK CONNECTOR, 2.7 M (9')

ULTRA-LOK™



3504500C
 ULTRA-LOK™ LEADING-EDGE SRL
 9.1 M (30') OF 5.5 MM (7/32") GALVANIZED STEEL
 WIRE ROPE, IN-LINE SHOCK ABSORBER

NANO-LOK™ edge



3500238
 NANO-LOK™ EDGE WEB
 2.4 M (8') 100% TIE-OFF SRL WITH ALUMINUM
 REBAR LOCK HOOK



5003050C
 COMPLETE ROPE GRAB SYSTEM
 IN A BAG FOR CONVENIENT COMPLIANCE AND
 SAFETY ON THE JOB

- KIT INCLUDES:**
- MOBILE ROPE GRAB 5000335C
 - SHOCK-ABSORBING LANYARD 1246012
 - LIFELINE X 15.2 M (50') 1202794C
 - COUNTERWEIGHT 5901583
 - TIE-OFF ADAPTOR 1003000C
 - CARRYING BAG 9511597





EXOFIT NEX™

ExoFit NEX™ harnesses are the most advanced harnesses in the industry. They're the culmination of our experience with ExoFit™ and ExoFit™ XP, ongoing research and the incorporation of new materials and innovative features.

COMFORT — We manufacture these harnesses using materials that won't add unnecessary weight

FUNCTION — When speed and efficiency are project requirements, ExoFit NEX will provide the freedom and confidence

DURABILITY — ExoFit NEX harnesses are designed using materials that last



1113348C
EXOFIT NEX ROPE ACCESS & RESCUE SUSPENSION HARNESS
.....
REPEL™ WEB, TECH-LITE™ ALUMINUM FRONT, BACK AND SIDE D-RINGS, DUO-LOK™ QUICK CONNECT BUCKLES AND HYBRID COMFORT PADDING (SIZE X-LARGE)

1113345C SMALL
1113346C MEDIUM
1113347C LARGE



1113318C
EXOFIT NEX ARC FLASH HARNESS
.....
WITH NOMEX®/KEVLAR® FIBER WEB, CONSTRUCTION STYLE, PVC-COATED ALUMINUM BACK D-RING, LOCKING QUICK CONNECT BUCKLES, SEWN-IN HIP PAD AND BELT, COMFORT PADDING (SIZE X-LARGE)

1113315C SMALL
1113316C MEDIUM
1113317C LARGE



1113328C
EXOFIT NEX ARC FLASH RESCUE HARNESS
.....
WITH NOMEX/KEVLAR FIBER WEB AND PADDING, BACK AND FRONT WEB LOOPS, QUICK CONNECT BUCKLE LEG STRAPS (SIZE X-LARGE)

1113325C SMALL
1113326C MEDIUM
1113327C LARGE

RESCUE EQUIPMENT



1150414
EXOFIT NEX ROPE ACCESS AND RESCUE HARNESS SUSPENSION SEAT SLING



3327100
ROLLGLISS™ R550 RESCUE AND DESCENT DEVICE
.....
30.5 M (100 FT.) RESCUE AND DESCENT KIT WITH RESCUE WHEEL, 1.2M (4 FT.) ANCHOR SLING, 2 CARABINERS AND CARRYING BAG



2100093
RESCUE HOOK AND HOT STICK ADAPTOR TOOL*

2100111
HOT STICK ADAPTOR TOOL ONLY*

* ITEMS SHOULD BE USED WITH HOT STICK POLE

* See page 19, 30-31 for additional rescue products.



NANO-LOK
SELF RETRACTING LIFELINE

WE'VE GOT YOUR BACK

Fall protection in bucket trucks poses unique challenges. Tight spaces and lack of mobility can make it difficult and inconvenient for the worker. Our specialized harnesses and lanyards provide a secure connection,

full range of motion in limited spaces and the ultimate in arc flash protection to meet or exceed OSHA, ANSI and CSA requirements.

NANO-LOK™ ARC FLASH BUCKET TRUCK SRL

Made specifically for the electrical utility industry.

COMPACT—The smallest and lightest arc flash SRL on the market!

VERSATILE—Unrivaled jobsite flexibility.

- 18 standard Nano-Lok™ configurations to meet virtually any arc flash or hot-work need
- Two unique web leg configurations specifically designed for bucket truck and aerial lift applications
- Industry leading 190 kg (420-lb.) user capacity

SAFE—The Nano-Lok Arc Flash SRL has been tested to ASTM F887 standards

- Electric arc performance of 40 cal/cm²
- Replaces lanyards and improves worker safety
- Stops falls within inches and reduces fall distances



3101578
NANO-LOK ARC FLASH
WITH WEB LEG WITH ALUMINUM
SNAP HOOK—WEB LOOP
ON HARNESS END



3101579
NANO-LOK ARC FLASH
WITH WEB LEG AND ALUMINUM
SNAP HOOK—ALUMINUM
CARABINER ON HARNESS END



3101541
NANO-LOK ARC FLASH
WITH SINGLE-LEG CONNECTOR
AND SNAP HOOK





EXOFIT NEX™

EXOFIT™ XP



1103088C
 EXOFIT NEX™ ARC FLASH HARNESS
 WITH NOMEX®/KEVLAR® FIBER
 WEB, PVC-COATED ALUMINUM BACK
 D-RING, LOCKING QUICK CONNECT
 BUCKLES, COMFORT PADDING
 (SIZE X-LARGE)

1103085C SMALL
 1103086C MEDIUM
 1103087C LARGE



1110892C
 EXOFIT™ XP ARC FLASH HARNESS
 WITH NOMEX/KEVLAR FIBER,
 PVC-COATED HARDWARE,
 PASS-THRU BUCKLES, BACK AND
 LEG NOMEX/KEVLAR FIBER PADS
 (SIZE X-LARGE)

1110893C SMALL
 1110890C MEDIUM
 1110891C LARGE



1110882C
 EXOFIT XP ARC FLASH HARNESS
 CONSTRUCTION STYLE, NOMEX/
 KEVLAR FIBER, WEB AND PADS,
 BACK WEB LOOP, QUICK CONNECT
 BUCKLES AND KEVLAR FIBER
 PASS-THRU BODY BELT
 (SIZE X-LARGE)

1110883C SMALL
 1110880C MEDIUM
 1110881C LARGE



1110751C
 DELTA™ ARC FLASH HARNESS
 WITH 3175 KG (7,000-LB.)
 NYLON WEB, NO METAL ABOVE
 WAIST, FRONT AND BACK WEB
 LOOP, PASS-THRU BUCKLE LEGS,
 LEATHER INSULATORS
 (SIZE X-LARGE)

1110754C SMALL
 1110750C MEDIUM
 1110752C LARGE



1110812C
 DELTA ARC FLASH HARNESS
 WITH NOMEX/KEVLAR FIBER WEB,
 NO METAL ABOVE WAIST, FRONT AND
 BACK WEB LOOP, QUICK CONNECT
 BUCKLE LEGS, LEATHER INSULATORS
 (SIZE X-LARGE)

1110815C SMALL
 1110810C MEDIUM
 1110811C LARGE



1150058C
 DELTA ARC FLASH KIT
 WITH 1110751 DELTA ARC FLASH
 NYLON HARNESS WITH WEB LOOP
 & 1240861 ARC FLASH SHOCK
 ABSORBING LANYARD 1.8 M (6')
 WITH BAG (SIZE X-LARGE)

1150054C LARGE

DuPont™, Kevlar® fiber, and Nomex® are trademarks or registered trademarks of E.I. du Pont de Nemours and Company.

PROTECTING AGAINST ARC FLASH

People working at heights may also be exposed to arc flashes. That's why we make fall protection equipment designed to withstand arc flash and still operates as intended. Our equipment uses the most recent ASTM F887 as the standard. We arc flash test all harnesses and lanyards through a third party, setting passing requirements for performance in accordance with ANSI Z359.1 dynamic test requirements. Through testing and training, you can be assured of quality products that help protect your worker.



1244610C
SHOCKWAVE™ 2
ARC FLASH LANYARD
.....
NOMEX®/KEVLAR® FIBER SINGLE-
LEG WITH SNAP HOOKS X 1.8 M (6')



1244611C
SHOCKWAVE 2
ARC FLASH LANYARD
.....
NOMEX/KEVLAR FIBER SINGLE-LEG
HOOK AND WEB LOOP X 1.8 M (6')



1246320
EZ-STOP FORCE2 ARC
FLASH LANYARD
.....
ADJUSTABLE NOMEX/KEVLAR FIBER
DOUBLE-LEG WITH SNAP HOOKS AT
EACH END X 1.8M (6')



1246317
EZ-STOP F2 ARC FLASH LANYARD
.....
ADJUSTABLE NOMEX/KEVLAR FIBER
WEBBING WITH SNAP HOOKS AT
ENDS X 1.8 M (6')

ADDITIONAL ARC FLASH LANYARD OPTIONS

PART #	DESCRIPTION
1246322	EZ-STOP F2 ADJUSTABLE 100% TIE-OFF WITH NOMEX/KEVLAR FIBER WEB, STEEL REBAR HOOKS (76MM (3") GATE OPENING) X 1.8 M (6')
1246312C	EZ-STOP SINGLE-LEG WITH POLYURETHANE COATED WEB AND SNAP HOOKS X 1.8M (6')





= rollgliss =


ROLLGLISS™ R520 RESCUE AND DESCENT

This fully automatic, hands-free descent for bucket trucks, aerial lifts, towers, cranes and more is simply the best escape solution on the market. It's easier to use and requires less training.

3305040
ROLLGLISS™ R520 ESCAPE DEVICE
 PROVIDES A QUICK, EFFICIENT
 MEANS OF EVACUATION FROM
 VARIOUS ELEVATED WORK SURFACES

Features and Benefits:

- Emergency rescue and evacuation from a wide variety of elevated work areas
- Fully automatic controlled descent
- Bidirectional design enables multiple rescues
- 15.2 m (50 ft.) 9.5 mm (3/8") kernmantle rope lifeline
- Dual redundant brake systems
- Integrated rope control ears
- Extremely compact and lightweight design
- High strength corrosion resistant construction
- Kit also contains 1 anchor sling, 1 carabiner and carrying bag
- Other lengths available up to 152 m (500 ft.) height

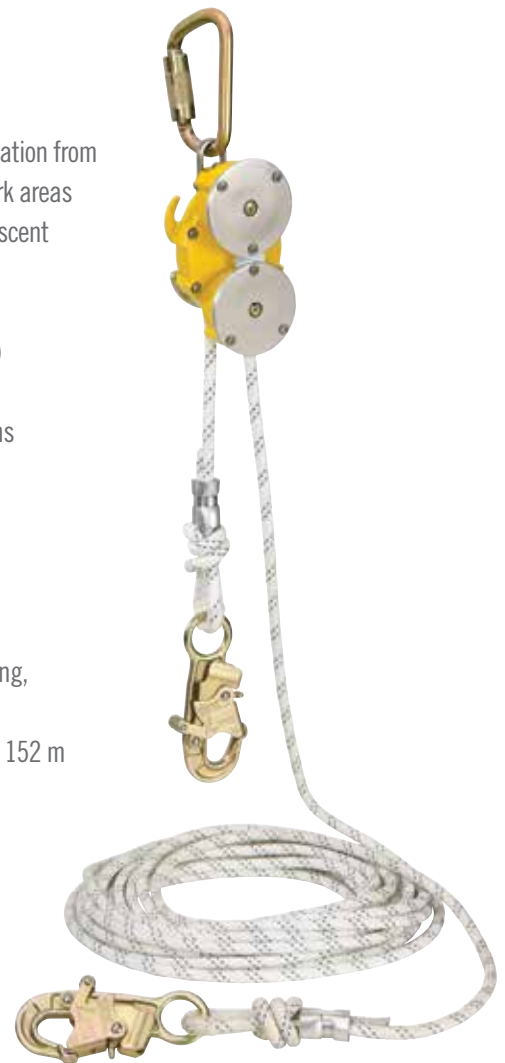

Additional Rollgliss accessories are on pages 30-31.

WE HAVE A SOLUTION FOR ANY SITUATION

Providing fall protection in substations requires the use of a wide variety of equipment. Transformers, breakers, switchgear and confined spaces are a challenge. Locating suitable anchor points, appropriate fall clearance distances and minimum approach distances all pose threats to worker safety. Our solutions are developed to allow you and your team to anchor and maneuver safely wherever you go.

ADVANCED PORTABLE FALL ARREST SYSTEM



8516691

ADVANCED PORTABLE FALL ARREST SYSTEM (PFAS)

- THREE INDEPENDENT SWIVELING TIE-OFF POINTS
- 360 DEGREES OF PROTECTION FOR THREE WORKERS
- TELESCOPIC DESIGN; 83.2 CM (32.75") TO 116.8 CM (46") TO 145.4 CM (57.25")
- LIGHTWEIGHT AND DURABLE ALUMINUM CONSTRUCTION
- LEVELING SCREWS PLUMB SYSTEM ON INCLINES UP TO 15 DEGREES
- BUILT-IN ANCHOR RING FOR HORIZONTAL LIFELINE ATTACHMENT
- PORTABLE AND FIXED BASES PROVIDE COMPLETE JOBSITE VERSATILITY



8516693

RESCUE DAVIT ARM FOR ADVANCED PORTABLE FALL ARREST POST

THE OPTIONAL RESCUE DAVIT ARM ASSEMBLES EASILY TO THE PORTABLE FALL ARREST POST, PROVIDING SIMPLE AND EFFICIENT RESCUE AND MATERIAL-HANDLING CAPABILITIES. IT'S MADE WITH LIGHTWEIGHT ALUMINUM MATERIALS FOR EASY TRANSPORTATION AND SETUP

**8516691 post not included—order separately*





8516996

4.2 M UNI-ANCHOR FALL ARREST POST
 MOUNTS USING UNI-ANCHOR PLATES AND EXTENDS UP TO
 4.2 M (14') TO PROVIDE A ONE-MAN-RATED FALL-ARREST
 ANCHOR POINT



7600701

6.1 M SAYFLINE™ SYNTHETIC HORIZONTAL LIFELINE SYSTEM

- COMPLETE SYSTEM IN BAG FOR INSTALL WITH NO SPECIAL TOOLS OR EQUIPMENT
- PORTABLE FOR RE-USE
- TWO TIE-OFF ADAPTORS INCLUDED TO ANCHOR SYSTEM TO STRUCTURE
- CAPACITY OF TWO WORKERS
- 6.1 M TO 30.5 M LENGTHS AVAILABLE (20' TO 100')

ACCESSORIES



8517422
SAND-BLASTED STEEL UNI-ANCHOR
 WITH TIE-OFF ANCHOR



8516997
UNI-ANCHOR I-BEAM
 BASE PORTABLE ANCHOR CLAMPS
 TO I-BEAMS, 25.5 KG (56 LBS.)

FLEXIGUARD™ SOLUTIONS

Flexiguard™ is designed to meet the requirements of your specific application while ensuring maximum safety and peace of mind.



HITCH MOUNT ANCHOR SYSTEM

The Hitch Mounted Anchor System is a portable system originally designed to access and maintain heavy mining equipment. The unique design of this system allows it to attach to a class three hitch for transport on a truck or service vehicle. Assembled in less than 20 minutes, this system provides anchorage points up to 6.7 m (22 feet) tall. It is rated for a maximum of two users.

Features and Benefits:


- Hitch mounted system for maximum portability
- Self-standing basket design for easy hookup to truck and convenient storage
- System assembles quickly and raises with included winch
- System includes heavy-duty stabilizing jacks
- Width 1.8 m (6 ft.)
- Anchor Height 6.7 m (22 ft.)
- 2 users
- Custom paint job

8530313
 HITCH MOUNT ANCHOR SYSTEM
 ANCHOR HEIGHT 6.7 M (22 FT.)
 WIDTH 1.8 M (6 FT.), UP TO 2 USERS





HITCH MOUNTED SYSTEM FOR
MAXIMUM PORTABILITY

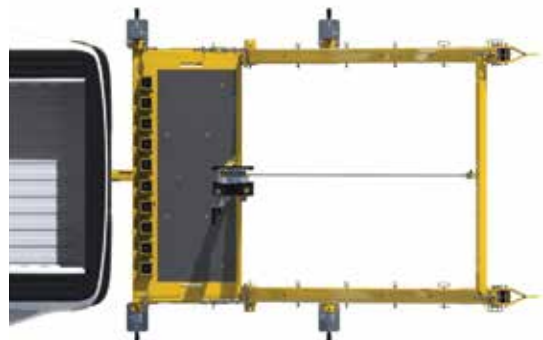

LAD-SAF™

The Lad-Saf™ Flexible Cable Ladder Safety System consists of a top and bottom bracket that act as anchors for a steel cable that runs the length of the climbing area. The Lad-Saf X2 sleeve, attached by carabiner to the harness, arrests falls by locking onto the cable.

Designed for ease of use, economy and versatility, optional brackets/designs are available for bolting or welding the system. There is a choice of rung clamp sizes/styles and there are systems for straight ladders and for connection to wood, concrete or steel structures.

TENSION INDICATOR

Integrated tension indicating bottom bracket takes the guesswork out of installation.

CUSTOMIZABLE

Hundreds of different brackets, styles and configurations for any application.

CORROSION RESISTANT CONSTRUCTION

Galvanized and stainless steel construction stands up to harsh environments for maintenance-free longevity.

SHOCK ABSORBING DESIGN

Integrated shock absorbing top bracket reduces forces imposed on ladder structure during a fall.

INTERMEDIATE CABLE GUIDES

Non-metallic cable guides prevent cable wear against the ladder and permits the climber to bypass without disconnecting.

Features and Benefits:

- Easy to climb
- Easy to install and detach
- Primary and secondary locking systems
- Integrated energy absorber/fall indicator
- Compact and corrosion resistant



6160030
 LAD-SAF X2 DETACHABLE CABLE
 SLEEVE WITH CARABINER
 FOR USE WITH 9.5 MM (3/8") OR
 8 MM (5/16") DIAMETER 1X7
 CORE CABLE





I-SAFE™ 3.1 MOBILE APP FLEXIBLE. CONVENIENT. EFFICIENT.

Compatible with iPhones®, iPads® and Android™ smartphones or tablets.

VIRTUALLY ALL DBI-SALA® PRODUCTS INCLUDE i-SAFE™ FUNCTIONALITY

As part of the Capital Safety™ commitment to safety innovation, you can easily integrate the i-Safe™ application with your current line of DBI-SALA® products, making your life easier to track your world-class investments.

THE FIRST RFID SYSTEM DEDICATED TO FALL PROTECTION EQUIPMENT

i-Safe Intelligent Safety System is an invaluable tool for customers looking to:

- Save time
- Increase compliance
- Improve the management of the safety equipment inspection process

SPECIFICALLY DESIGNED FOR FIELD TECHNICIANS, FACILITY MANAGERS, INSPECTORS AND AUDITORS

The i-Safe 3.1 Technology:

- Automates all aspects of inspections, work orders and field data collection
- Allows users to create their own checklists or processes for any size organization
- Shifts management focus from paper-based to technology based activities
- Pre-enabled i-Safe tags eliminate the need for manual documentation – saves time and money
- Fast, easy scanning of i-Safe tag improves management of the safety equipment inspection process – simplifies compliance to OSHA regulations

DBI-SALA® ADVANCED CONFINED SPACE

Entering and exiting confined spaces can happen in a variety of circumstances and pose a myriad of challenges: restricted movement, limited space and general physical challenges. That's why our hoist and winch equipment provide the most lightweight and efficient rescue and retrieval with the greatest reliability. We believe our products are the strongest, lightest and most versatile in the industry.



8518000
ADVANCED FIVE-PIECE HOIST SYSTEM
DAVIT ARM AND BASE SYSTEM INCLUDES 29.2
CM TO 69.8 CM (11.5" TO 27.5") ADJUSTABLE
OFFSET UPPER MAST 8518001, 83.8 CM (33")
LIGHTWEIGHT LOWER MAST 8518002 AND
THREE-PIECE LIGHTWEIGHT BASE 8518005.
INCLUDES WINCH-MOUNTING BRACKET

Order winch and SRL separately.



SALALIFT™ II

The Salalift™ II is manually operated for easy operation. Simply rotate the handle to raise or lower personnel or materials. Gear ratio is 6:1 with an average lifting speed of 3.8 m/min. No power source is required. The quick Mount System incorporates a quick-mount bracket which mates with a bracket on all DBI-SALA® support structures allowing the user to attach/detach the device with a detent pin to make retrofitting easy (no additional hardware needed).



8102001
SALALIFT II WINCH
WITH 18.3 M (60') OF 6.4 MM (1/4") GALVANIZED
CABLE, MOUNTING BRACKET AND WINCH BAG



8000000
ADVANCED 2.13 M (7') ALUMINUM TRIPOD
WITH ADJUSTABLE LOCKING LEGS, SAFETY
CHAINS, RUBBER SAFETY SHOES WITH SPIKED
EDGES, TOP PULLEY ASSEMBLY AND MOUNTING
BRACKET BASE 8005048

MODEL #	DESCRIPTION	TOTAL WEIGHT
8102060	SALALIFT II WINCH WITH 18.3 M (60') OF 6.4 MM (1/4") GALVANIZED CABLE, MOUNTING BRACKET AND WINCH BAG	16.3 KG
8102022	SALALIFT II WINCH WITH 18.3 M (60') OF 6.4 MM (1/4") STAINLESS STEEL CABLE, MOUNTING BRACKET AND WINCH BAG	16.3 KG
8102009	SALALIFT II WINCH WITH 27.4 M (90') OF 4.8 MM (3/16") GALVANIZED CABLE, MOUNTING BRACKET AND WINCH BAG	15.8 KG
8102011	SALALIFT II WINCH WITH 27.4 M (90') OF 4.8 MM (3/16") STAINLESS STEEL CABLE, MOUNTING BRACKET AND WINCH BAG	15.8 KG
8102005	SALALIFT II WINCH WITH 36.6 M (120') OF 4.8 MM (3/16") GALVANIZED CABLE, MOUNTING BRACKET AND WINCH BAG	16.7 KG
8102007	SALALIFT II WINCH WITH 36.6 M (120') OF 4.8 MM (3/16") STAINLESS STEEL CABLE, MOUNTING BRACKET AND WINCH BAG	16.7 KG
8102050	SALALIFT II WINCH WITH 15.2 M (50') OF SYNTHETIC TECHNORA ROPE AND LIFELINE COUNTERWEIGHT, MOUNTING BRACKET AND WINCH BAG	14.9 KG

EQUIPMENT THAT WON'T LET YOU DOWN UNTIL YOU NEED IT TO

Capital Safety™ makes gear that's lighter, easier to use and quick to set up, because we want it to be there when you need it. Whether it's controlled decent rescue or technical rope access rescue you're looking for, we have you covered.

HARNESSES



EXOFIT NEX™



EXOFIT™ XP

1103088C
EXOFIT NEX™ ARC FLASH HARNESS
WITH NOMEX®/KEVLAR® FIBER WEB, PVC-COATED ALUMINUM BACK D-RING, LOCKING QUICK CONNECT BUCKLES, COMFORT PADDING

1103085C SMALL
1103086C MEDIUM
1103087C LARGE

1110881C
EXOFIT™ XP ARC FLASH HARNESS
CONSTRUCTION STYLE, NOMEX/KEVLAR FIBER, WEB AND PADS, BACK WEB LOOP, QUICK CONNECT BUCKLES AND KEVLAR FIBER PASS-THRU BODY BELT

1110883C SMALL
1110880C MEDIUM
1110882C X-LARGE



1110781C
DELTA™ ARC FLASH HARNESS
WITH 3175 KG (7,000-LB.) NYLON WEB, VEST STYLE, BACK WEB LOOP, QUICK CONNECT BUCKLES, LEATHER INSULATORS, RESCUE LOOPS

1110788C SMALL
1110780C MEDIUM
1110782C X-LARGE



2100093
RESCUE HOOK AND HOT STICK ADAPTOR TOOL*

2100111
HOT STICK ADAPTOR TOOL ONLY*

**Items should be used with hot stick pole.*



EXOFIT NEX™



1113348C
 EXOFIT NEX™ ROPE ACCESS AND RESCUE HARNESS
 REPEL™ WEB, TECH-LITE™ ALUMINUM FRONT,
 BACK AND SIDE D-RINGS, DUO-LOK™ QUICK CONNECT
 BUCKLES AND HYBRID COMFORT PADDING

1113345C SMALL
 1113346C MEDIUM
 1113347C LARGE

1113373C
 EXOFIT NEX BLACK-OUT ROPE
 ACCESS AND RESCUE HARNESS
 REPEL WEB, TECH-LITE ALUMINUM
 FRONT, BACK AND SIDE D-RINGS,
 DUO-LOK QUICK CONNECT BUCKLES
 AND HYBRID COMFORT PADDING

1113370C SMALL
 1113371C MEDIUM
 1113372C LARGE



1150414
 EXOFIT NEX ROPE ACCESS
 AND RESCUE HARNESS SEAT

ROPES



PART #	DESCRIPTION
8705115	ROPE LIFELINE FINISHED BOTH ENDS WITH A THIMBLE 11 MM (7/16") STATIC KERNMANTLE, POLY/NYLON 15 M (50')
8705116	ROPE LIFELINE FINISHED BOTH ENDS WITH A THIMBLE 11 MM (7/16") STATIC KERNMANTLE, POLY/NYLON 30 M (100')
8705117	ROPE LIFELINE FINISHED BOTH ENDS WITH A THIMBLE 11 MM (7/16") STATIC KERNMANTLE, POLY/NYLON 60 M (200')
8705118	ROPE LIFELINE FINISHED BOTH ENDS WITH A THIMBLE 11 MM (7/16") STATIC KERNMANTLE, POLY/NYLON 100 M (325')
8705119	ROPE LIFELINE FINISHED BOTH ENDS WITH A THIMBLE 11 MM (7/16") STATIC KERNMANTLE, POLY/NYLON 125 M (410')
8705120	ROPE LIFELINE FINISHED BOTH ENDS WITH A THIMBLE 11 MM (7/16") STATIC KERNMANTLE, POLY/NYLON 200 M (650')
8700600	SEWN LOOP PERSONAL CHEST PRUSIK 6 MM (1/4") KERNMANTLE PRUSIK CORD, POLY/NYLON 0.52 M (1.7')
8700601	SEWN LOOP PERSONAL CHEST PRUSIK 6 MM (1/4") KERNMANTLE PRUSIK CORD, POLY/NYLON 1.2 M (3.9')

= rollgliss™ =

The Rollgliss™ Technical Rescue product line meets the needs of rescuers for rigging, encompassing everything from single descent systems to complicated flying foxes. The Rollgliss Technical Rescue Range compliments our already-established line of Industrial Rescue systems, including pre-rigged rescue kits like the Rollgliss R350, Rollgliss R550 and more. When your life and the lives of others depend on it, you want to know that your rescue kit won't fail you. Trust in the strength of a product that was made for working hard.

DESCENDERS



8700079
NOWORRIES™ DOUBLE
STOP DESCENDER
RED ALUMINUM ANODIZED
GOLD 11 MM (7/16")

RIGGING PLATES



2189999
RIGMASTER™ RIGGING PLATE
PAW-SHAPED FIVE
ANODIZED GOLD



2189997
RIGMASTER RIGGING PLATE
SMALL TRIANGLE SIX
ANODIZED GOLD

CARABINERS & QUICK LINKS



8700168
RIGMASTER CARABINERS*
SMALL OFFSET D RESCUE
CARABINER ALUM 16 MM (5/8")
SCREW GATE 30 KN (6,750 LBS.)



8700198
RIGMASTER CARABINERS*
MEDIUM OFFSET D RESCUE
CARABINER ALUM 22 MM (7/8")
SCREW GATE 36 KN (8,100 LBS.)



2000025
RIGMASTER CARABINERS
MEDIUM OFFSET D RESCUE
CARABINER ALUM 22 MM (7/8")
AUTO-LOCKING 36 KN (8,100 LBS.)

**Carabiners do not meet CSA or ANSI standards.*

PULLEYS



8700012
SINGLE ALUM
40 MM (1.5") UP TO 11 MM (7/16")



8700013
PRUSIK MINDING SINGLE ALUM
40 MM (1.5") UP TO 11 MM (7/16")



8700057
RESCUEMATE™ TRANSPORT PULLEY
TYROLEAN "V" ALUM 60 MM (2.25")
UP TO 13 MM (1/2")





HAUL KITS

8701100
 RESCUEMATE™ MICRO HAUL KIT
 MECHANICAL ADVANTAGE: 6:1
 WORKING LENGTH: 2 M (6.5')
 ROPE SIZE: 8 MM (5/16")
 WORKING LOAD LIMIT: 300 KG (660 LBS.)

8704104
 RESCUEMATE AUTO LOCK HAUL KIT
 MECHANICAL ADVANTAGE: 4:1
 WORKING LENGTH: 10 M (33')
 ROPE SIZE: 11 MM (7/16")
 WORKING LOAD LIMIT: 300 KG (660 LBS.)



ACCESSORIES

ROPECRAFT™ BAGS

PART #	DESCRIPTION
8700225	S 25 L (1,525 CI) FITS 50 M X 11 MM (164' X 7/16") OR 25 M X 13 MM (82' X 1/2") PVC
8700222	M 25 L (2,440 CI) FITS 100 M X 11 MM (328' X 7/16") OR 50 M X 13 MM (164' X 1/2") PVC
8700223	L 25 L (3,050 CI) FITS 200 M X 11 MM (655' X 7/16") OR 100 M X 13 MM (328' X 1/2") PVC
8700224	XL 25 L (3,660 CI) FITS 300 M X 11 MM (980' X 7/16") OR 200 M X 13 MM (655' X 1/2") PVC



8700225

ASCENDERS

8700523
 LEFT-HAND ASCENDER
 ROPE SIZE: 10.5-13 MM
 (7/16"-1/2")



8700524
 RIGHT-HAND ASCENDER
 ROPE SIZE: 10.5-13 MM
 (7/16"-1/2")



8700522
 CHEST ASCENDERS
 GOLD, RETROFIT
 ROPE SIZE: 10.5-13 MM
 (7/16"-1/2")



1219020

EXPLORER FOOT LOOPS & ETRIER

PART #	DESCRIPTION
1219006	SINGLE-LEG WEBBING FOOT LOOP ADJUSTABLE UP TO 1.8 M (6')
1219020	5-STEP ETRIER WEBBING 1.8 M (6')

SWIVEL & GEAR ROLL

8700144
 SWIVEL
 MINIMUM BREAKING
 STRENGTH: 40 KN (9,000 LBS.)



OZPOD™

8700006
 RESCUE FRAME
 MAX. HEIGHT: 3 M (10')
 MAX. LEG SPREAD: 4 M (13')



INNOVATION THAT BRINGS WORKERS AT HEIGHT HOME SAFELY.

Capital Safety™ is a global company solely dedicated to fall protection and rescue. Our focus is razor sharp. And it continually drives us to design and manufacture the safest possible height safety gear.

We understand the industries we serve and listen to the workers in the field. We employ the best engineers to create innovative solutions and patent the products that keep workers safe at heights around the world. Capital Safety has the best quality and largest range of fall protection products in the industry. But we're more than a product company.

We take an innovative approach in bringing our products to the field. We have created international partnerships and a vast network of authorized distributors, certified installers and service centers. We offer on-site and in-house training. And we're ISO 9001-2008 certified for customer service, as well as manufacturing and engineering.

Capital Safety is one of the world's leading manufacturers of fall protection and rescue equipment, with decades of experience and a legacy of innovation. Look for complete solutions in our extensive line of DBI-SALA® and Protecta® products.

Capital Safety - CANADA: 800 387 7484
USA: 800 328 6146 | Mexico: +52 (55) 5719 4820
Columbia: +57 (1) 593 4747 | Brazil: 800 387 7484
Asia: +65 65587758 | Germany: +49 (0) 2 76 18 33 82 29
New Zealand: +64 0800 212 505 | Australia: +61 1800 245 002
Europe, Middle East, Africa: +33 (0)4 97 10 00 10
Northern Europe: +44 (0) 1527 548 000
www.capitalsafety.com info@capitalsafety.com

