



## SNAPConnect® USB Charger Duplex Receptacles




Description	Color	15A 125V AC	20A 125V AC
Hospital Grade SNAPConnect USB Charger, Tamper-Resistant Style Line® decorator duplex receptacle, 15 or 20 Amp, 125 Volt AC with one type A & one type-C USB port, 3 Amp up to 9 Volt USB output.	Black Brown Gray Ivory Light Almond Red White	<b>SNAP8200UACBK</b> <b>SNAP8200UAC</b> <b>SNAP8200UACGY</b> <b>SNAP8200UACI</b> <b>SNAP8200UACLA</b> <b>SNAP8200UACR</b> <b>SNAP8200UACW</b>	<b>SNAP8300UACBK</b> <b>SNAP8300UAC</b> <b>SNAP8300UACGY</b> <b>SNAP8300UACI</b> <b>SNAP8300UACLA</b> <b>SNAP8300UACR</b> <b>SNAP8300UACW</b>
SNAPConnect USB Charger, Tamper-Resistant Style Line® decorator duplex receptacle, 15 or 20 Amp, 125 Volt AC with one type A & one type-C USB port, 3 Amp up to 9 Volt USB output.	Black Brown Gray Ivory Light Almond White	<b>SNAP15UACBK</b> <b>SNAP15UAC</b> <b>SNAP15UACGY</b> <b>SNAP15UACI</b> <b>SNAP15UACLA</b> <b>SNAP15UACW</b>	<b>SNAP20UACBK</b> <b>SNAP20UAC</b> <b>SNAP20UACGY</b> <b>SNAP20UACI</b> <b>SNAP20UACLA</b> <b>SNAP20UACW</b>
Clear right angle terminal with 6 inch leads #12 AWG THHN/THWN-2; Polycarbonate housing material.	Solid Stranded	<b>SNAP1RNA</b> <b>SNAP2RNA</b>	<b>SNAP1RNA</b> <b>SNAP2RNA</b>

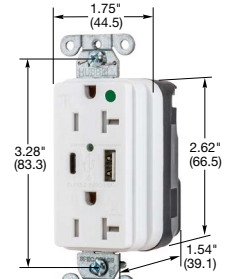

SNAP8300UACW

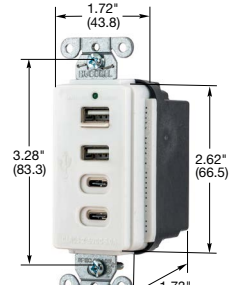

USB4W

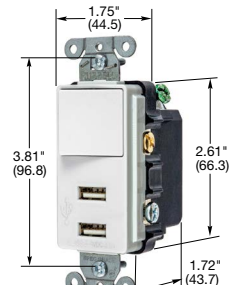

USB102W

## 4 Port USB Charger Outlets



Description	Color	Catalog Number
USB Charger Outlets, 4 USB ports, two Type A & two Type-C ports, 5 Amp up to 9 Volt DC, Style Line® decorator.	Black Brown Gray Ivory Light Almond White	<b>USB4ACBK</b> <b>USB4AC</b> <b>USB4ACGY</b> <b>USB4ACI</b> <b>USB4ACLA</b> <b>USB4ACW</b>


## Switch Combo Outlets



Description	Color	Catalog Number
Switch Combo Outlet, two USB type 2.0 ports, 2.1 Amp, 5 Volt DC, Style Line® decorator.	Black Brown Gray Ivory Light Almond White	<b>USB102BK</b> <b>USB102</b> <b>USB102GY</b> <b>USB102I</b> <b>USB102LA</b> <b>USB102W</b>

## 2X2 USB Work Surface Pop-Up Boxes

Surface Dimensions	Cut Out Dimensions	Product Depth	Maximum Surface Thickness	Finish	Catalog Number
5" x 5"	4.62" x 4.62"	3.55"	1.125"	Brushed Aluminum	<b>WSBUSB2X2ALU</b>
5" x 5"	4.62" x 4.62"	3.55"	1.125"	Black Powder Coat	<b>WSBUSB2X2BLK</b>

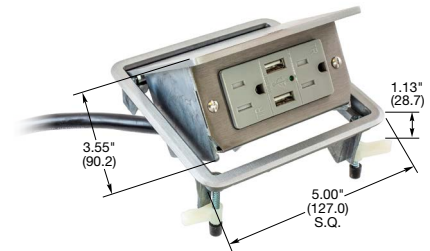

WSBUSB2X2ALU


## PlugTrak® Raceway with USB Charger Outlets

USB type 2.0 ports, 2.4 Amp, 5 Volt DC, 15 Amp, 125 Volt AC receptacles.

Material	Length	Ends	# of USB Ports	# of Single Receptacles	Color	Catalog Number
Steel	3 ft.	6 in. leads	2	2	Ivory	<b>HBL20GB312UIV</b>
Steel	6 ft.	6 in. leads	4	4	Ivory	<b>HBL20GB612UIV</b>
Aluminium	3 ft.	6 in. leads	2	2	Aluminum	<b>HBLALU20GB312U</b>
Aluminium	6 ft.	6 in. leads	4	4	Aluminum	<b>HBLALU20GB612U</b>
Non-metallic	6 ft.	6 in. leads	4	8	Office White	<b>PT156112U*</b>

Portable - Plug in

Steel	40 in.	6 ft. cord and plug	2	4	Ivory	<b>HBL20C215UIV</b>
Non-metallic	36 in.	6 ft. cord and plug	2	4	Office White	<b>PT153112UP*</b>

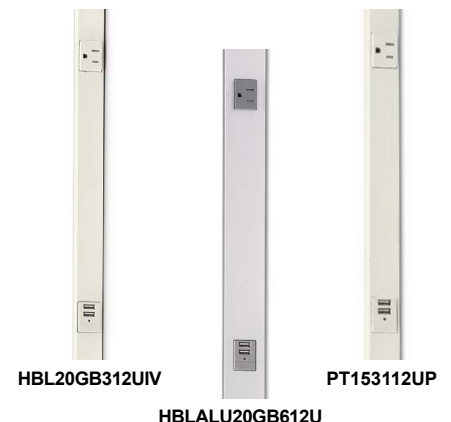

HBL20GB312UIV

HBLALU20GB612U

PT153112UP

Dimensions in Inches (mm)

Note: \*For additional colors add "BK" for Black or "W" for white.