



JUSTRITE[®]

Popular!

Product

ESSENTIALS

Sure-Grip[®] EX Safety Storage Cabinets

EXtra safe, EXtra secure, EXtra sturdy

- Keep dangerous liquids safely organized and segregated
- Increase maximum allowable quantities of flammable and combustible liquids in control areas
- Improve efficiency by locating materials near point-of-use

Exclusive benefits:

U•Loc™ Door Handle

Flush-mount handle comes with installed cylinder lock and key set. Accepts optional padlock for added security.

patent pending

Haz-Alert™ Reflective Labeling

During power outages or under fire conditions, firefighter friendly warning labels reflect with high visibility when illuminated with a flashlight.

patent pending

SpillSlope™ Safety Shelves

Safely direct spills to back and bottom of leak proof sump. Adjusts on 3" (76-mm) centers for versatile storage.

patented

Quality Welded Design

Welded construction provides extra sturdiness and strength for long life. Quality is backed by an industry first 10-year warranty.

industry 1st



Haz-Alert™ reflective band at bottom alerts firefighters when crawling in smoke-filled areas.

Protect workers, reduce fire risks, and improve productivity by storing hazardous liquids in Sure-Grip[®] EX safety cabinets. Designed to meet FM, OSHA, NFPA, and International Fire Code standards—depending on model—Justrite cabinets feature an all-welded, 18-gauge (1-mm) steel, double-walled construction, with 1½" (38-mm) air space. The insulating air space provides protection by maintaining a comparative lower temperature inside the cabinet where flammable or combustible materials are stored. Fail-safe, self latching doors with durable three-point stainless-steel bullet latches provide easy, positive door closure. The U-Loc™ door handle comes with an installed cylinder lock and two keys, and also accepts optional padlock for extra security. Self-close door styles include fusible links at top

corners that can be used to hold doors open. The fusible links melt at 165°F (74°C) to release doors and allow them to automatically close under fire conditions. Concealed closing mechanism maximizes available shelf space. Rounded door corners reduce accidental nicks or cuts and potential injury. Other features include a 2" (51-mm) leak tight sump, dual vents with flame arresters, four adjustable leveling feet, grounding connector, and reflective warning labels. Durable hybrid powder coat finish inside-and-out provides chemical resistance with high visibility colors for easy recognition. Ten-year warranty.



Phone: 800-798-9250
www.justritemfg.com

Sure-Grip® EX Safety Cabinets



18-gauge (1-mm) double wall steel with 1½" (38-mm) of insulating air space. Welded construction holds squareness for long life; door astragal provides extra sturdiness.




Formed internal offset adds rigidity and strength.



Enclosed self-close mechanism provides obstruction-free access to top shelf space. Self-indexing doors close in sequence to ensure a tight closure from top to bottom. *Patent Pending*


894520, 45 gal., self-close

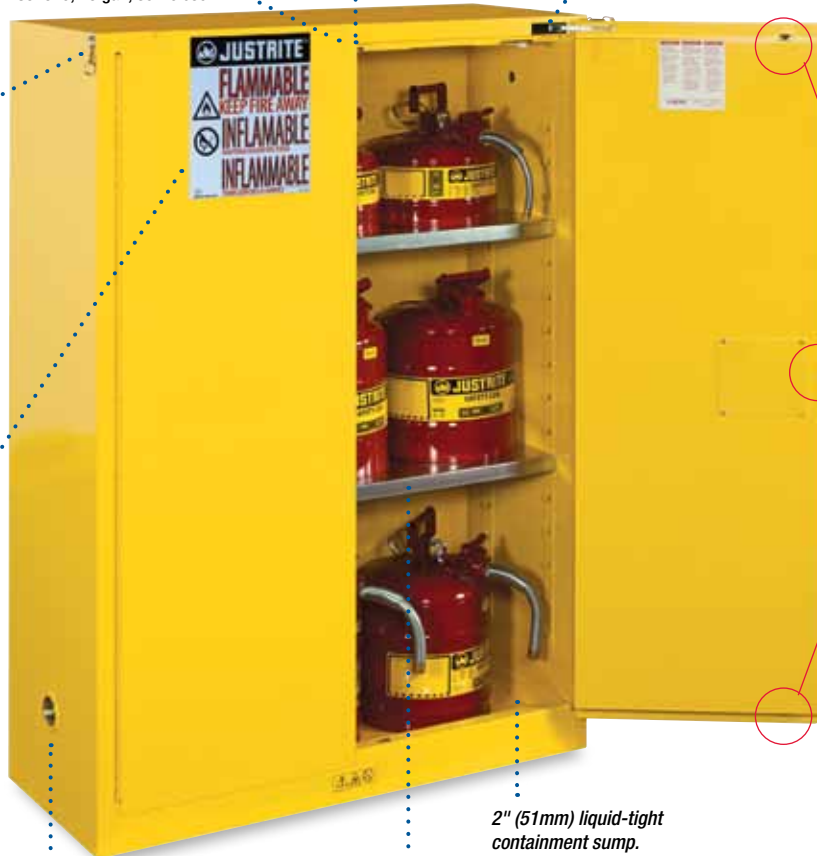

Rounded safety corners on doors reduce accidental nicks or cuts and potential hand injury.



Fusible links hold doors wide open and melts at 165°F (74°C) for automatic closure (on self-close models).



Three-point, stainless steel bullet self-latching system provides failsafe, positive door closure with increased heat resistance. *Patent Pending*



Haz-Alert™ reflective labels provide high visibility in the dark under fire conditions or power outage when illuminated by a flashlight beam. Warning in three languages. Large international warning icons enhance global communications. *Patent Pending*

Dual vents with built-in flame arresters at bottom and opposite top.

2" (51mm) liquid-tight containment sump.



Patented SpillSlope™ safety shelves direct spills to back and bottom of leak proof sump; adjust on 3" (76-mm) centers for versatile storage.



U•Loc™ handle accommodates optional padlock for extra security and keycoding multiples for convenient access. Double key set included for keyed lock. *Patent Pending*



Complies with OSHA 29 CFR 1910.106 and NFPA Code 30, section 9.5
Most are FM approved
Shelves meet ANSI MH28.1



Phone: 800-798-9250
www.justritemfg.com

Specifications

Sure-Grip® EX Yellow Safety Cabinets

Capacity Gal. (Ltr.)	Door No.	Door Type	No. of Shelves	Dimensions H X W X D (mm)	Approvals Regulations**	Ship Wt. Lbs. (Kgs.)	Model No.
30 (114)	2	Manual	1	44" x 43" x 18" (1118 x 1092 x 457)	FM,N,O FM,N,O,U FM,N,O,U	221 (100) 223 (101) 246 (112)	893000 893020 893080
	2	Self-close					
	1	Sliding, self-close					
30 (114)	2	Manual	1	35" x 36" x 24" (889 x 914 x 610)	FM,N,O	204 (93)	893300
	2	Self-close					
45 (170)	2	Manual	2	65" x 43" x 18" (1651 x 1092 x 457)	FM,N,O FM,N,O,U FM,N,O,U	299 (136) 301 (137) 301 (137)	894500 894520 894580
	2	Self-close					
	1	Sliding, self-close					
60 (227)	2	Manual	2	65" x 34" x 34" (1651 x 864 x 864)	FM,N,O FM,N,O,U FM,N,O,U	366 (166) 368 (167) 374 (170)	896000 896020 896080
	2	Self-close					
	1	Sliding, self-close					
90 (341)	2	Manual	2	65" x 43" x 34" (1651 x 1092 x 864)	FM,N,O FM,N,O,U FM,N,O,U	424 (192) 423 (192) 480 (218)	899000* 899020* 899080*
	2	Self-close					
	1	Sliding, self-close					



894500

Specialty Sure-Grip® EX Yellow Safety Cabinets

Capacity Gal. (Ltr.)	Door No.	Door Type	No. of Shelves	Dimensions H X W X D (mm)	Approvals Regulations**	Ship Wt. Lbs. (Kgs.)	Model No.
Mini for Aerosols	1	Manual	1	22" x 17" x 8" (559 x 432 x 203)	-	43 (19)	890200
4 (15) Countertop	1	Manual	1	22" x 17" x 17" (559 x 432 x 432)	N,O N,O,U	62 (28) 64 (29)	890400 890420
	1	Self-close					
12 (45) Compac	1	Manual	1	35" x 23¼" x 18" (889 x 591 x 457)	FM,N,O FM,N,O,U	120 (54) 122 (55)	891200 891220
	1	Self-close					
15 (57) Compac	1	Manual	1	44" x 23¼" x 18" (1118 x 591 x 457)	FM,N,O FM,N,O,U	154 (70) 156 (71)	891500 891520
	1	Self-close					
22 (83) Undercounter	2	Manual	1	35" x 35" x 22" (889 x 914 x 559)	FM,N,O FM,N,O,U	190 (86) 192 (87)	892300 892320
	2	Self-close					
22 (83) Slimline	1	Manual	3	65" x 23¼" x 18" (1650 x 591 x 460)	FM,N,O FM,N,O,U	209 (95) 211 (96)	892200 892220
	1	Self-Close					
54 (204) Deep Slimline	1	Manual	3	65" x 23¼" x 34" (1650 x 591 x 860)	FM,N,O FM,N,O,U	298 (135) 300 (136)	895400 895420
	1	Self-Close					
12 (45) Piggyback	2	Manual	-	18" x 43" x 18" (457 x 1092 x 457)	FM,N,O FM,N,O,U	129 (59) 131 (59)	891300 891320
	2	Self-close					
17 (64) Piggyback	2	Manual	1	24" x 43" x 18" (610 x 1092 x 457)	FM,N,O FM,N,O,U	148 (67) 150 (68)	891700 891720
	1	Self-close					
20 (76) Wall Mount	2	Manual	5	44" x 43" x 12" (1118 x 1092 x 305)	FM,N,O	205 (93)	893400



892300



890400

Sure-Grip® EX Yellow Safety Cabinets for Drums (Vertical or Horizontal Storage)

Capacity Gal. (Ltr.)	No. of Drums	Included in base	Door No.	Door Type	Dimensions H X W X D (mm)	No. of Shelves	Approvals Regulations**	Ship Wt. Lbs. (Kgs.)	Model No.
55 (200)	1 vert	Steel	2	Manual	65" x 34" x 34" (1651 x 864 x 864)	1	FM,N,O FM,N,O,U FM,N,O FM,N,O,U	391 (177) 393 (178) 391 (177) 393 (178)	896200 896220 896260 896270
		Support	2	Self-close					
		Drum	2	Manual					
		Rollers	2	Self-close					
110 (400)	2 vert	Steel	2	Manual	65" x 59" x 34" (1651 x 1498 x 864)	1	N,O N,O,U N,O N,O,U	610 (277) 612 (278) 661 (300) 701 (318)	899100* 899120* 899160* 899170*
		Support	2	Self-close					
		Drum	2	Manual					
		Rollers	2	Self-close					
55 (200)	1 horiz	Tracks for	2	Manual	50" x 30" x 48" (1270 x 762 x 1219)	-	FM,N,O FM,N,O,U	361 (164) 363 (165)	899300 899320
		Opt. cradle	2	Self-close					

* Code states that not more than 60 gallons may be Class I and Class II liquids.

**Approval and Regulations Key

- FM** FM Global Tested and Approved
- N** Designed in accordance with specifications set forth in the National Fire Protection Association (NFPA Code 30)
- O** Complies with OSHA regulations
- U** Complies with NFPA 1 Fire Code and International Fire Code



899100

Storage Options

Reduce Vapors



Note:
VOC vapor adsorption rates will differ based upon variables such as the chemical itself, its purity or its vapor pressure, temperature, humidity, charcoal age, etc.

VaporTrap™ Filters improve your work environment by reducing harmful VOC vapors. Activated carbon filter medium contained in a stainless-steel mesh cartridge adsorbs the volatile organic chemical vapors found inside cabinets containing flammable liquids. This reduces employee's inhalation exposure to VOCs and lowers emissions of VOCs into the atmosphere. Sturdy 4" x 5½" (102 x 139-mm) magnetized base offers flexible placement anywhere within the cabinet. Date notation area on label serves as a reminder for replacement. Life cycle varies based upon vapor types and concentrations.



Two to a pack

VaporTrap™ Filter NEW

Description	Nom. Dimensions Filter L x D (mm)	Ship Wt. Lbs. (Kgs.)	Model No.
VaporTrap™ Filter (2 pk.)	8¾" x 2¼" (222 x 57)	4 (2)	29916

The VaporTrap™ Filter is not intended to be used as a substitute for using safe, closed containers as required by OSHA and the EPA. It is important to clean up spills and residues from the cabinet and containers.

Organize Liquids



Cabinet Shelf Dividers keep small containers organized. Set of four steel, powder coated dividers offer flexibility – simply place over shelf and slide into position.

Stabilize Where Needed



Floor Mount



Wall Mount

Seismic Bracket Kit provides an extra measure of stability for earthquake or hurricane prone areas. All mounting hardware includes floor and wall brackets which do not require drilling into cabinet, maintaining FM approval on the cabinet.

Description	Dimensions H x W x D (mm)	Ship Wt.	
		Lbs. (Kgs.)	Model No.
14" (355mm) Deep Shelf Divider	2" x 2 ¹ / ₃₂ " x 14 ¹¹ / ₆₄ " (51 x 52 x 359)	5 (2)	29985
18" (457mm) Deep Shelf Divider	2" x 2 ¹ / ₃₂ " x 18 ¹¹ / ₆₄ " (51 x 52 x 462)	6 (3)	29990
Seismic Bracket Kit	4" x 48" x 4" (102 x 1219 x 102)	7 (3)	84000
Padlock Master Lock® No. 5	Shackle ¾" (10)	2 (1)	29933

Master Lock® is a registered trademark of Master Lock Co.

Other colors available for the storage of

corrosives ■
 combustibles ■
 pesticides ■



893022



893011



894524