




TOP TIE FORMED WIRE INSULATOR TIE "F-NECK"

ALUMINUM/STEEL
LDIF

- For securing bare or plastic jacketed conductor in the top groove of interchangeable headstyle insulators.
- Fargo LDIF series formed wire distribution ties are designed for use with ACSR, AAC, AAAC, AWAC[®],
- Compacted ACSR & Compacted AAC.
- F-Neck insulator: 2-7/8" neck diameter
- Recommended for use with ANSI Class 55-4 Pin, 55-5 Pin, 57-1 Pin, 57-2 Pin & 57-3 Pin Insulators.

Note: Consult factory for information on other applications. Right hand lay standard.

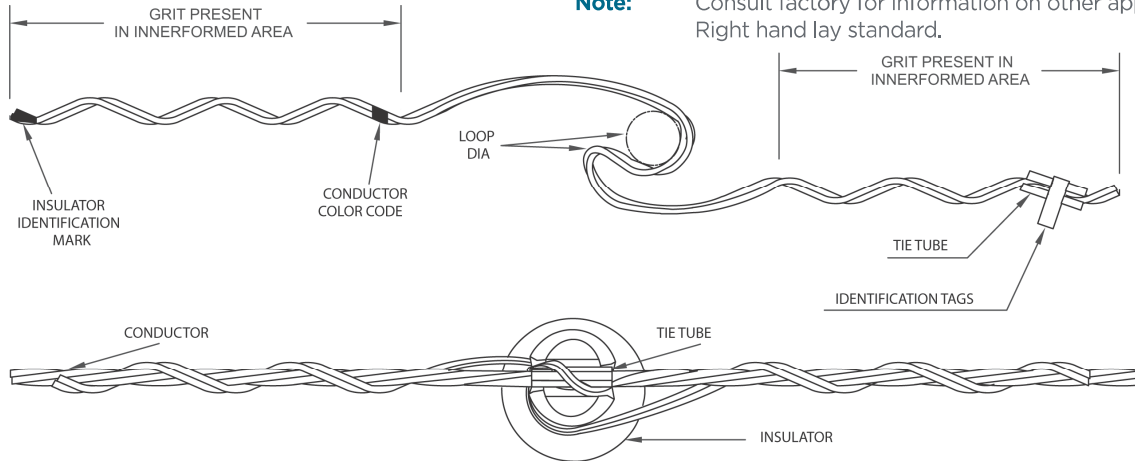

LDIF

CATALOG NUMBER	NOMINAL CONDUCTOR SIZE			DIAMETER RANGE		PACKAGING PER BOX		APPLIED LENGTH	INSULATOR IDENT. MARK	CONDUCT. COLOR CODE
	ACSR	AAC	AAAC	MIN	MAX	UNITS	WT LBS (KG)			
9/16" Minimum Groove Radius										
LDIF4500AS	#6 (6/1)	#4 (7W) C*		0.190 (4.83)	0.215 (5.46)	100	18 (8.2)	25 (635)	YELLOW	BLUE
LDIF4501AS	#4 (6/1) C* #4 (7/1) C*	#4 (7W)		0.216 (5.47)	0.244 (6.21)	100	19 (8.6)	26 (660)	YELLOW	BROWN
LDIF4502AS	#4 (6/1) #4 (7/1)	#3 (7W)	#4 (7W)	0.245 (6.23)	0.277 (7.05)	100	19 (8.6)	27 (686)	YELLOW	ORANGE
LDIF4503AS		#2 (7W)	#3 (7W)	0.278 (7.06)	0.315 (8.01)	100	20 (9.1)	29 (737)	YELLOW	PURPLE
LDIF4504AS	#2 (6/1) #2 (7/1) #1 (6/1)	#1 (7W) #1 (19W)	#2 (7W)	0.316 (8.03)	0.357 (9.08)	100	20 (9.1)	31 (787)	YELLOW	RED
LDIF4505AS	1/0 (6/1)	1/0 (7W) 1/0 (19W)	1/0 (7W)	0.358 (9.09)	0.405 (10.30)	100	21 (9.5)	32 (813)	YELLOW	YELLOW
LDIF4506AS	2/0 (6/1)	2/0 (7W) 2/0 (19W)	2/0 (7W)	0.406 (10.31)	0.459 (11.67)	50	18 (8.2)	25 (635)	YELLOW	BLUE
LDIF4507AS	3/0 (6/1)	3/0 (7W) 3/0 (19W)	3/0 (7W)	0.460 (11.68)	0.520 (13.21)	50	18 (8.2)	27 (686)	YELLOW	ORANGE
LDIF4508AS	4/0 (6/1)	4/0 (7W) 4/0 (19W) 266.8 (7W)	4/0 (7W)	0.521 (13.23)	0.588 (14.95)	50	19 (8.6)	29 (737)	YELLOW	RED

NOTES: All dimensions: inches (mm) unless otherwise noted.
AWAC is a registered trademark of Copperweld Co.
"C" indicates Compact stranding.
Add "NT" suffix for no tie tube (Pad). Example: LDIF4505ASNT.



TOP TIE FORMED WIRE INSULATOR TIE "F-NECK" (CONTINUED)

ALUMINUM/STEEL
LDIF

LDIF										
CATALOG NUMBER	NOMINAL CONDUCTOR SIZE			DIAMETER RANGE		PACKAGING PER BOX		APPLIED LENGTH	INSULATOR IDENT. MARK	CONDUCT. COLOR CODE
	ACSR	AAC	AAAC	MIN	MAX	UNITS	WT LBS (KG)			
9/16" Minimum Groove Radius (Continued)										
LDIF4509AS	266.8 (18/1) 266.8 (26/7)	266.8 (19W) 266.8 (37W) 336.4 (19W)		0.589 (14.96)	0.665 (16.95)	50	19 (8.6)	32 (813)	YELLOW	PURPLE
LDIF4510AS	336.4 (18/1) 336.4 (26/7) 397.5 (18/1)	350 (19W) 397.5 (37W)		0.666 (16.91)	0.755 (19.19)	50	20 (9.1)	32 (813)	YELLOW	BROWN
LDIF4511AS	397.5 (24/7) 397.5 (26/7) 477 (18/1) 477 (24/7) 477 (26/7)	450 (19W) 477 (19W) 477 (37W) 500 (19W) 500 (37W) 556.5 (19W) 556.5 (37W)		0.756 (19.20)	0.858 (21.79)	50	20 (9.1)	33 (838)	YELLOW	RED
5/8" Minimum Groove Radius										
LDIF4512AS	556.5 (18/1) 556.5 (24/7) 556.5 (26/7) 636 (18/1)	636 (37W) 700 (37W) 700 (61W)		0.859 (21.81)	0.968 (24.60)	50	21 (9.5)	35 (889)	YELLOW	BLUE
3/4" Minimum Groove Radius										
LDIF4513AS	636 (24/7) 636 (26/7) 715.5 (24/7) 795 (36/1) 795 (45/7) 795 (54/7)	795 (37W) 795 (61W)		0.969 (24.61)	1.096 (27.85)	50	22 (10.0)	38 (965)	YELLOW	GREEN
LDIF4514AS	795 (26/7) 954 (36/1) 954 (54/7) 1033.5 (45/7) 1033.5 (54/7)	1033.5 (37W) 1033.5 (61W)		1.097 (27.86)	1.240 (31.50)	50	23 (10.5)	41 (1041)	YELLOW	YELLOW

NOTES: All dimensions: inches (mm) unless otherwise noted.
 AWAC is a registered trademark of Copperweld Co.
 "C" indicates Compact stranding.
 Add "NT" suffix for no tie tube (Pad). Example: LDIF4505ASNT.

DE
11