



BR/R LED

10BR40/LED/827-22/DIM 120V 6/1

Philips Dimmable LED Reflector Lamps provide a soft, diffused level of light and smooth dimming to reduce glare. The sleek, lightweight design is ideal for downlighting.


Product data

| General Information | |
|---------------------------------------|------------------------------------|
| Cap-Base | E26 [Single Contact Medium Screw] |
| Nominal Lifetime (Nom) | 25000 h |
| Switching Cycle | 50000X |
| Technical Type | 10-60 W |
| Light Technical | |
| Color Code | 822-827 [tunable warm white] |
| Initial lumen (Nom) | 800 lm |
| Luminous Flux (Rated) (Nom) | 800 lm |
| Color Designation | Soft White |
| Correlated Color Temperature (Nom) | 2200-2700 K |
| Luminous Efficacy (Rated) (Nom) | 80 lm/W |
| Color Consistency | <7 |
| Color Rendering Index (Nom) | 80 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
| Operating and Electrical | |
| Input Frequency | 60 Hz |
| Power (Rated) (Nom) | 10 W |
| Lamp Current (Nom) | 120 mA |
| Wattage Equivalent | 65 W |
| Starting Time (Nom) | 0.5 s |
| Warm Up Time to 60% Light (Nom) | 0.5 s |
| Power Factor (Nom) | 0.9 |

| Voltage (Nom) | 120 V |
|---------------------------------|--------------------------------|
| Temperature | |
| T-Case Maximum (Nom) | 85 °C |
| Controls and Dimming | |
| Dimmable | Yes |
| Mechanical and Housing | |
| Bulb Finish | Frosted (FR) |
| Approval and Application | |
| Energy star mark | Energy star |
| Suitable For Accent Lighting | Yes |
| Product Data | |
| Order product name | 10BR40/LED/827-22/DIM 120V 6/1 |
| EAN/UPC - Product | 046677457013 |
| Order code | 457010 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 6 |
| Material Nr. (12NC) | 929001155804 |
| Net Weight (Piece) | 0.001 kg |

BR/R LED




Dimensional drawing



BR40 G5 120V 9W-65W 650lm 2700K E26 D

| Product | D | C |
|--------------------------------|--------|--------|
| 10BR40/LED/827-22/DIM 120V 6/1 | 127 mm | 162 mm |

Photometric data

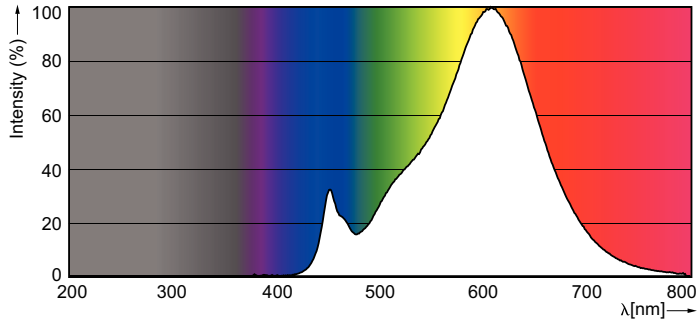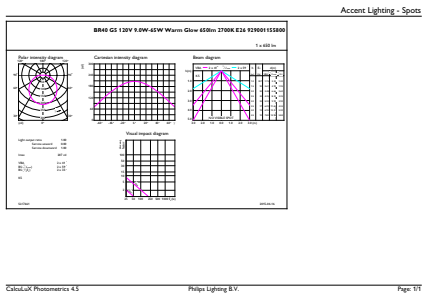

BR/R LED

